REAR FLOOR PAN (ASSY): Short Body


F24718A


With the body lower back inner panel removed.

Symbol meaning

: Remove Weld Points

F24718B

REMOVAL

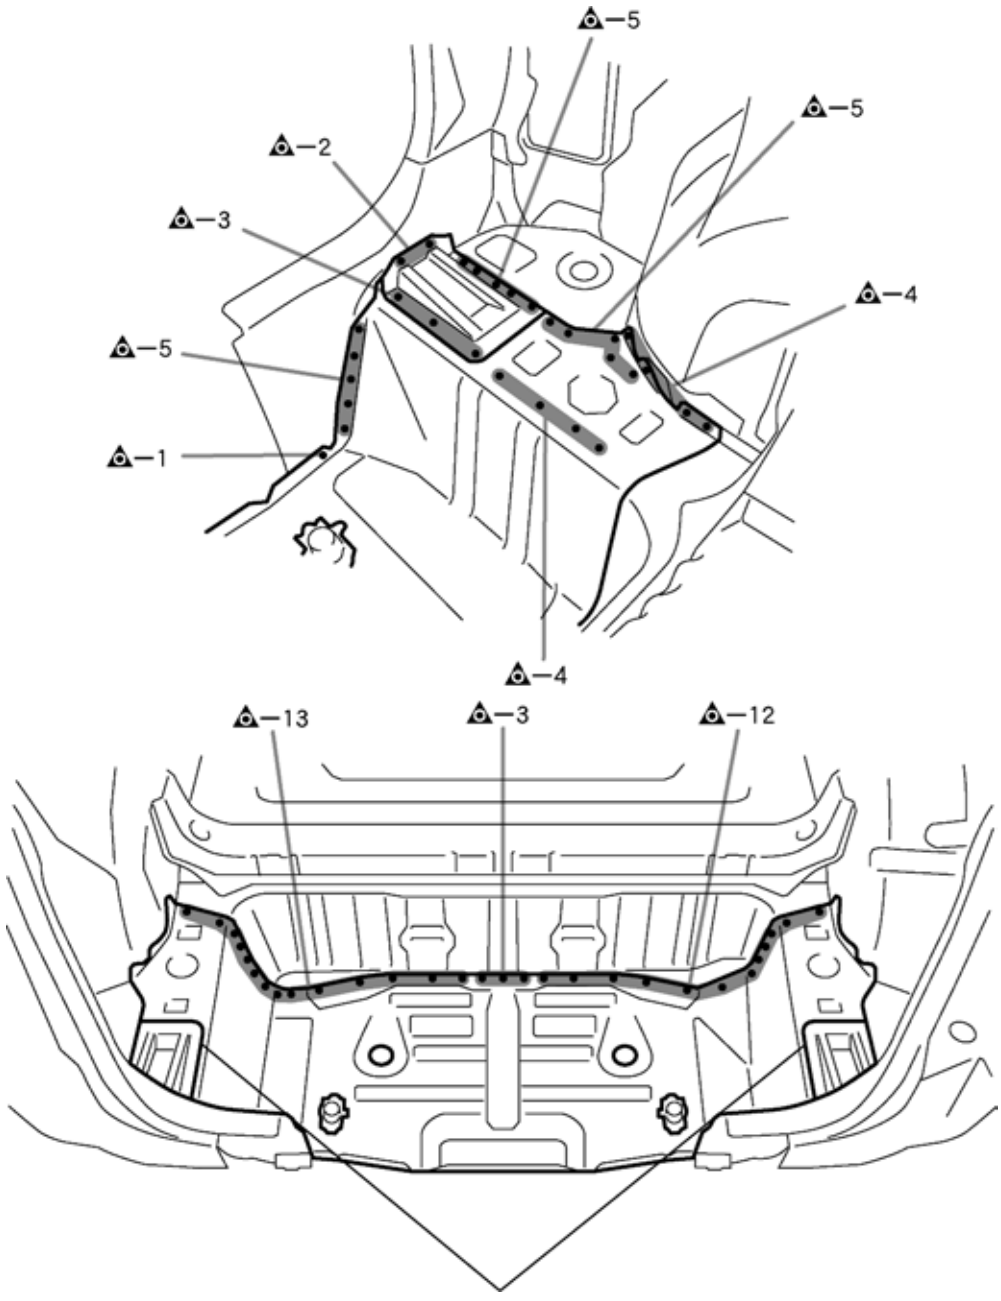

Rear Floor Panel No. 2 Reinforcement

F24718

REMOVAL POINT


1 Remove the rear floor panel No. 2 reinforcement at the same time.

Symbol meaning

O I : MIG Plug Weld

F24719B

INSTALLATION

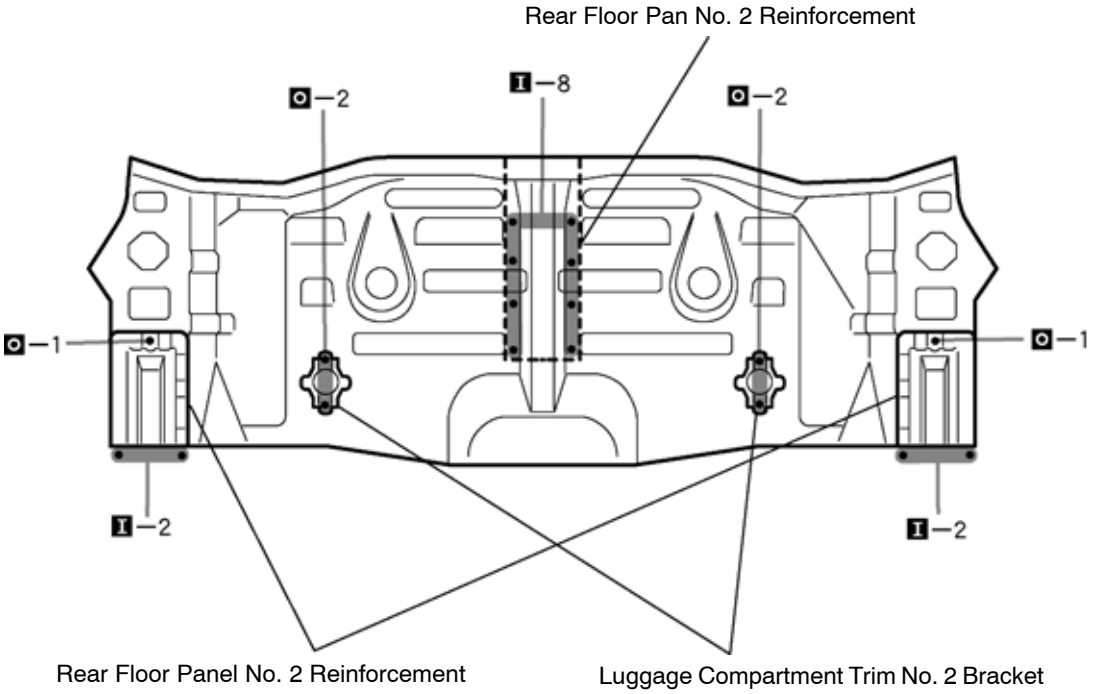

F24719


INSTALLATION POINT

1 Before temporarily installing the new parts, weld the rear floor panel No. 2 reinforcement, luggage compartment trim No. 2 bracket and rear floor pan No. 2 reinforcement with the standard number of welding points.

Symbol meaning

: MIG Plug Weld

F24720B

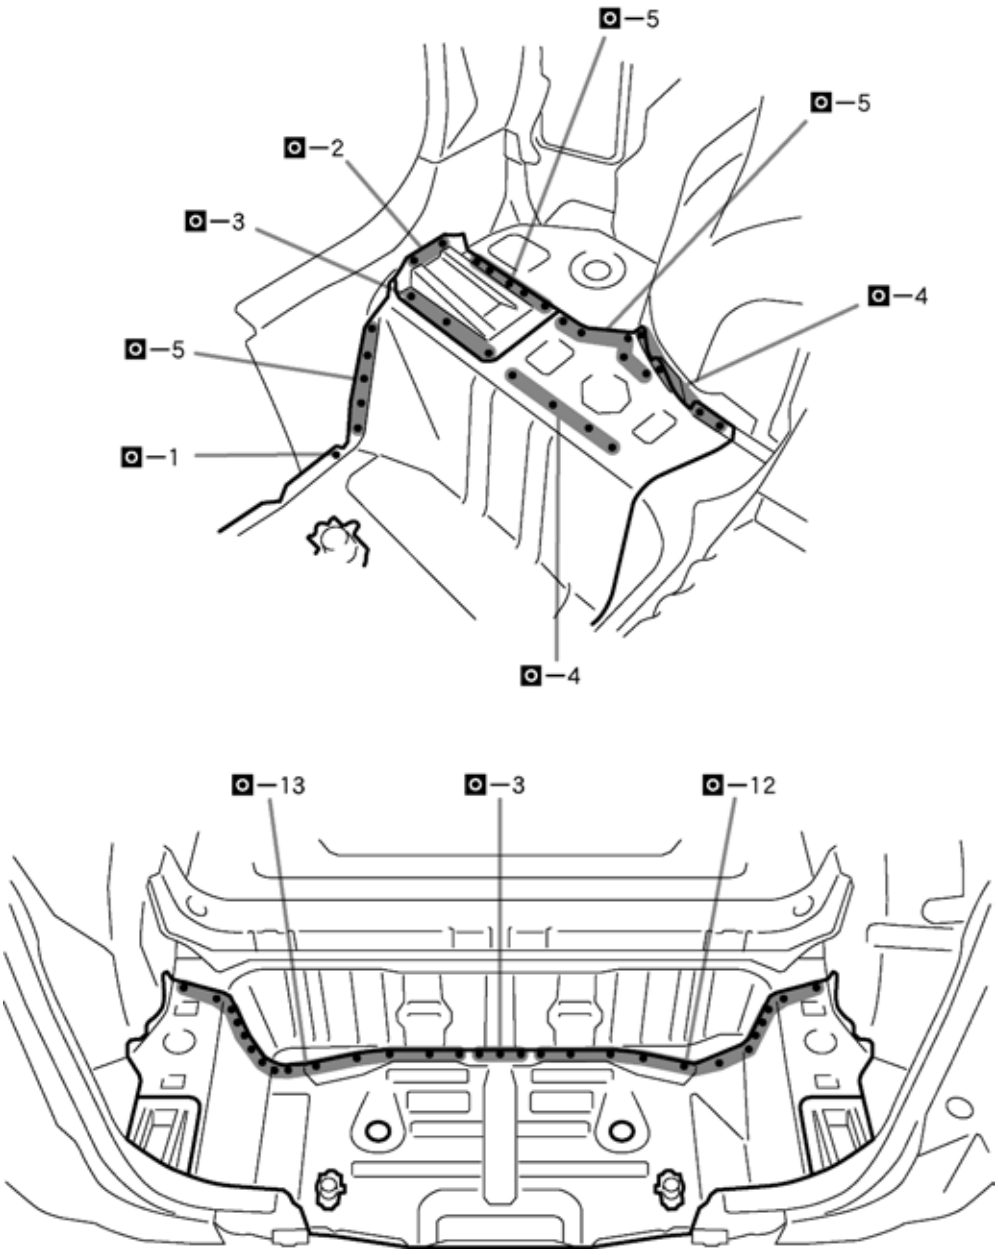

F24720

INSTALLATION POINT

1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.