SIDE MEMBER TO FLOOR REINFORCE (ASSY)




F24724A

Symbol meaning

REMOVAL	: Remove Weld Points	: Cut with disc sander, etc.
INSTALLATION	: MIG Plug Weld	: Tack Weld

F24724B

REMOVAL·INSTALLATION

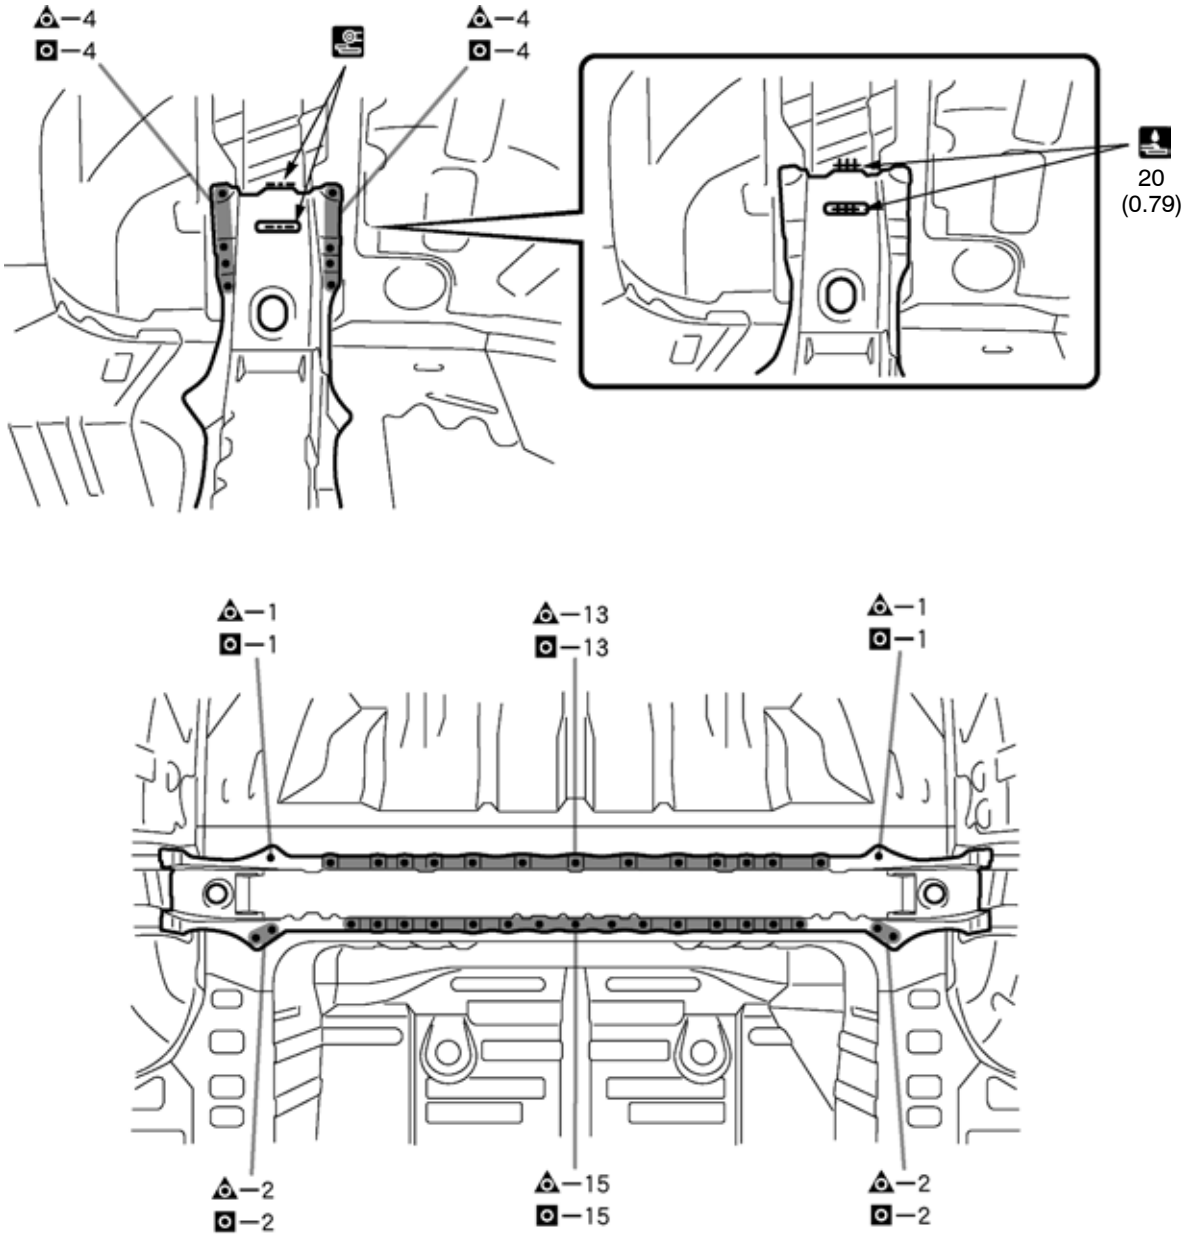

mm (in.)

F24724

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)

2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.