REAR FLOOR SIDE PANEL FRONT EXTENSION (ASSY)


F24725A


With the rear floor pan removed.

Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: MIG Plug Weld

F24725B

REMOVAL·INSTALLATION

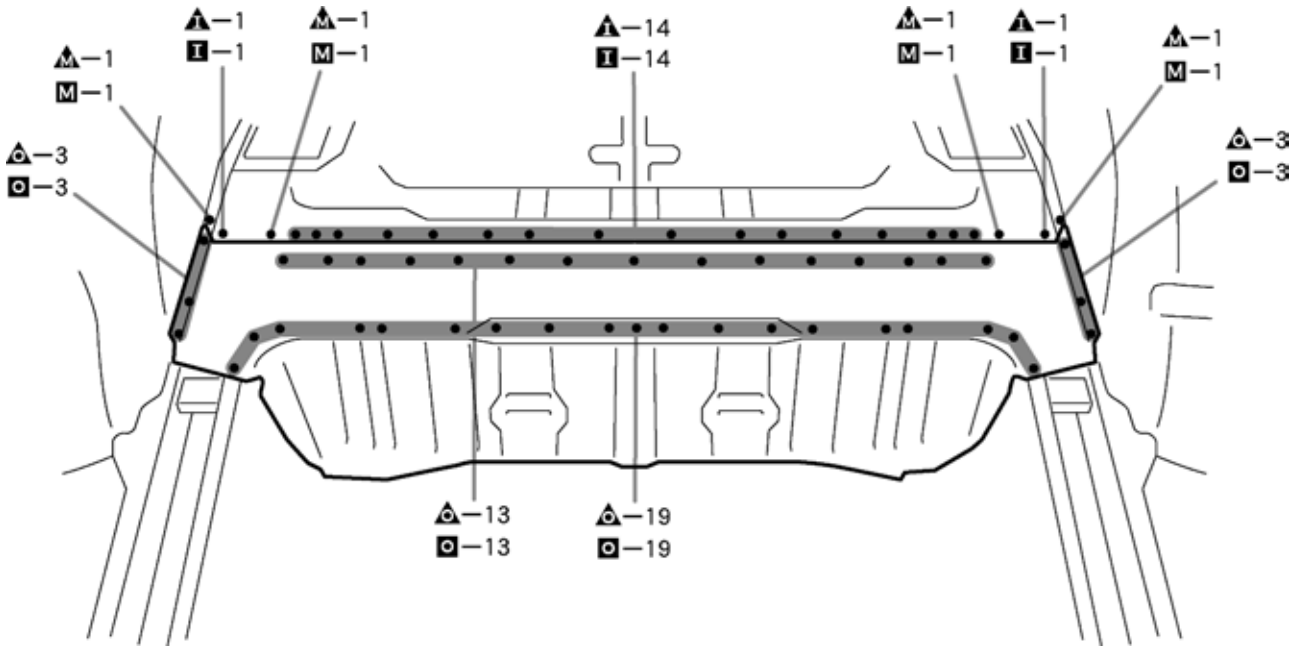

F24725

INSTALLATION POINT

1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.