
NAME PLATE APPLICATION PROCEDURE

(a) Heat the double-sided tape remaining on the body with an infrared lamp or equivalent.
HINT:
Heat the tape to 40 to 60°C for approximately 1 to 2 minutes.

(b) Wipe off the remaining double-sided tape using a clean cloth or equivalent.
CAUTION:
If a name plate is installed without thoroughly removing the remaining double-sided tape from the body, the name plate will not adhere properly. Make sure to thoroughly removing the double-sided tape.

(c) After cleaning the installation area of the body with degreasing agent, attach the name plate to the position shown in the illustration.
CAUTION:
The working environment should be 20°C when installing the name plate. If the working environment is below 20°C, heat the installation area of the body to 20 to 30°C and then install the name plate.


[USA, CANADA]

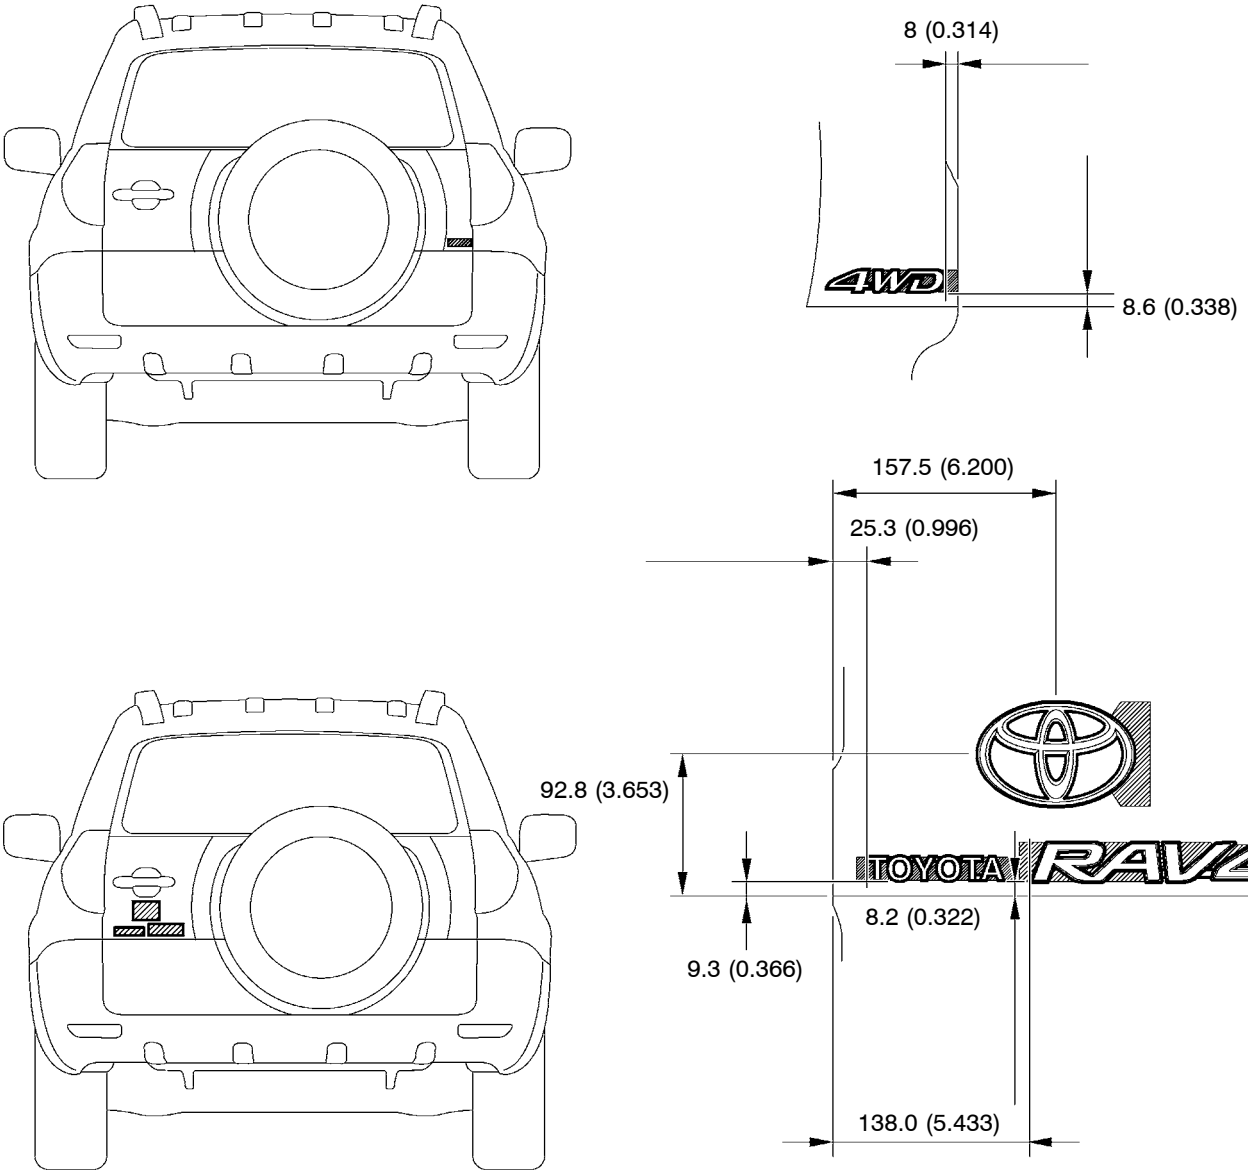


mm (in.)

F24764

[USA, CANADA]

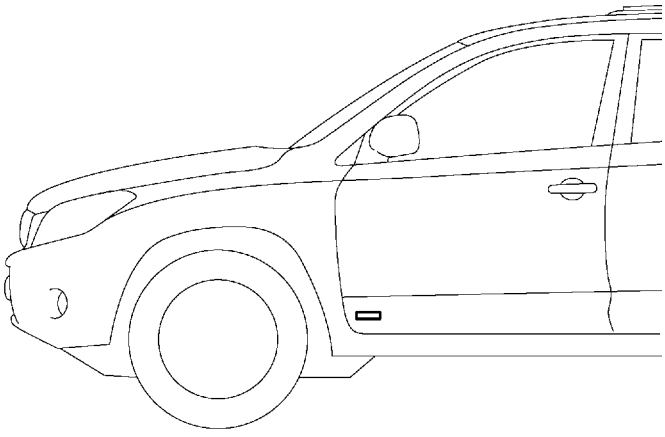


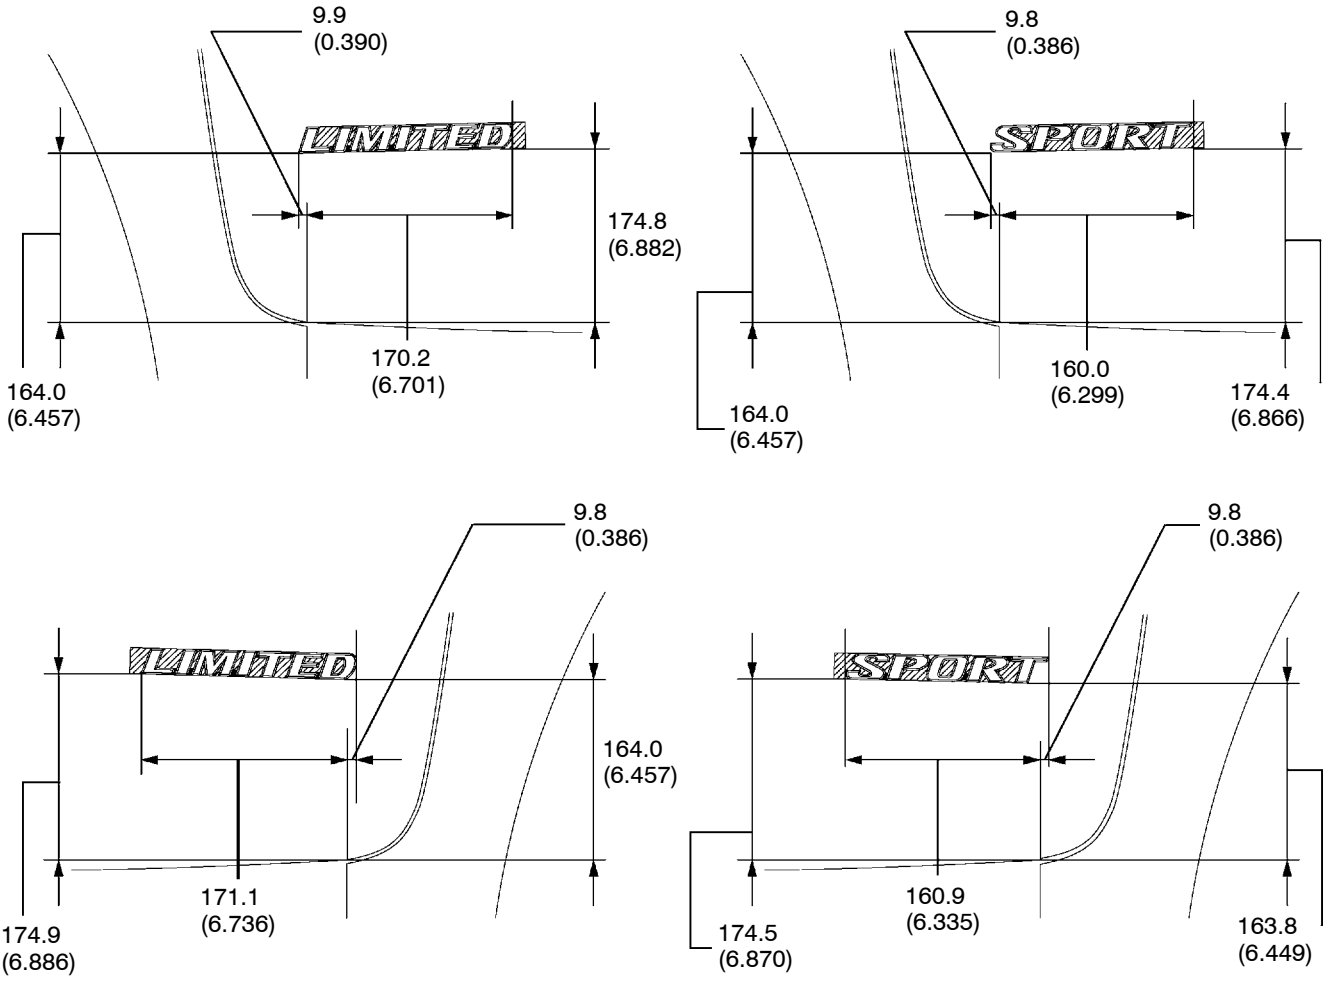



mm (in.)


F24767


[GENERAL, EXPORT]

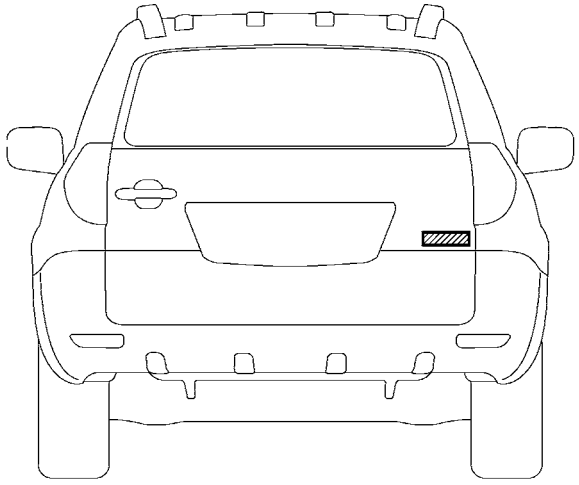


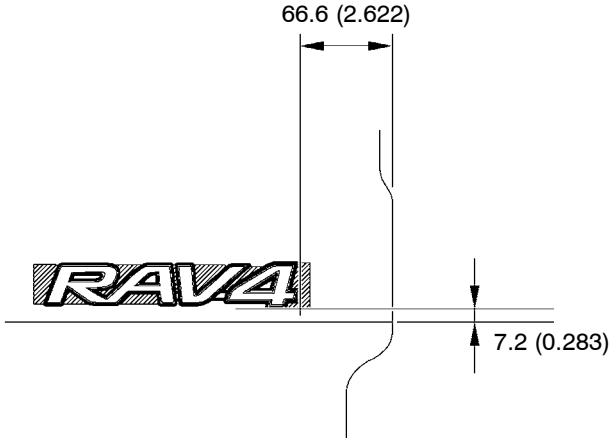

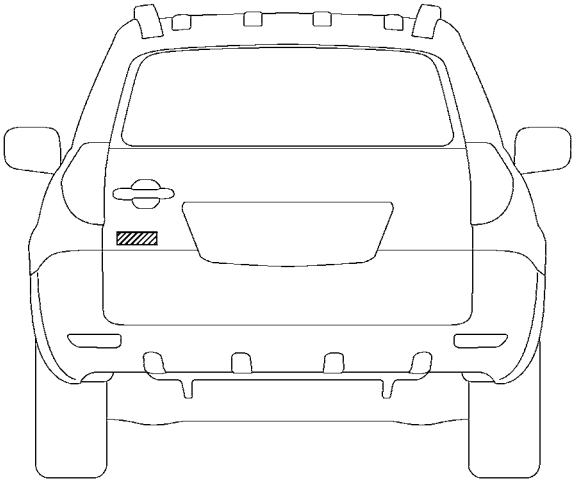

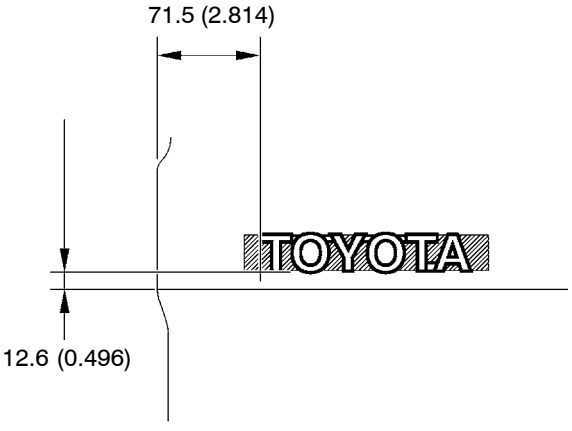

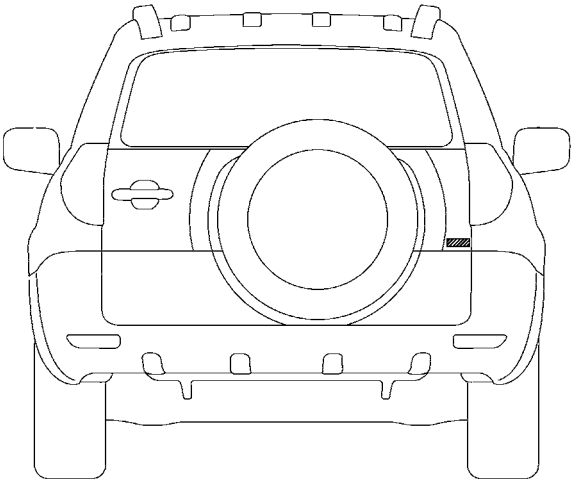


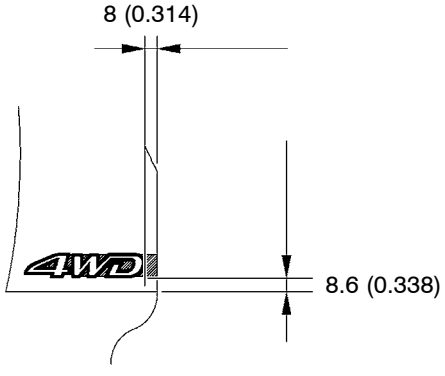


mm (in.)

F24765

[GENERAL, EXPORT]

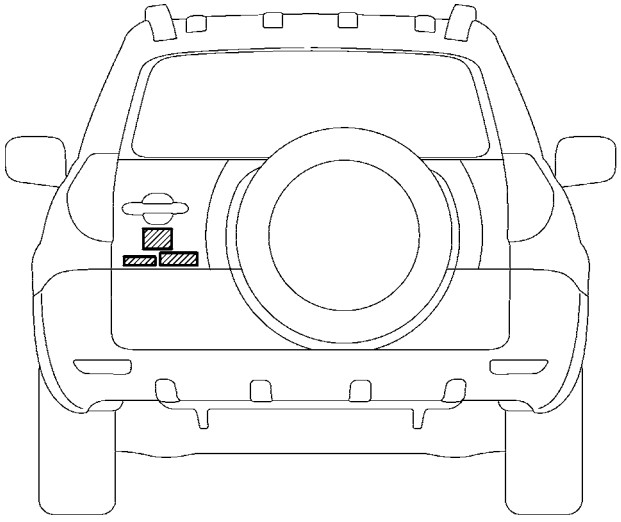


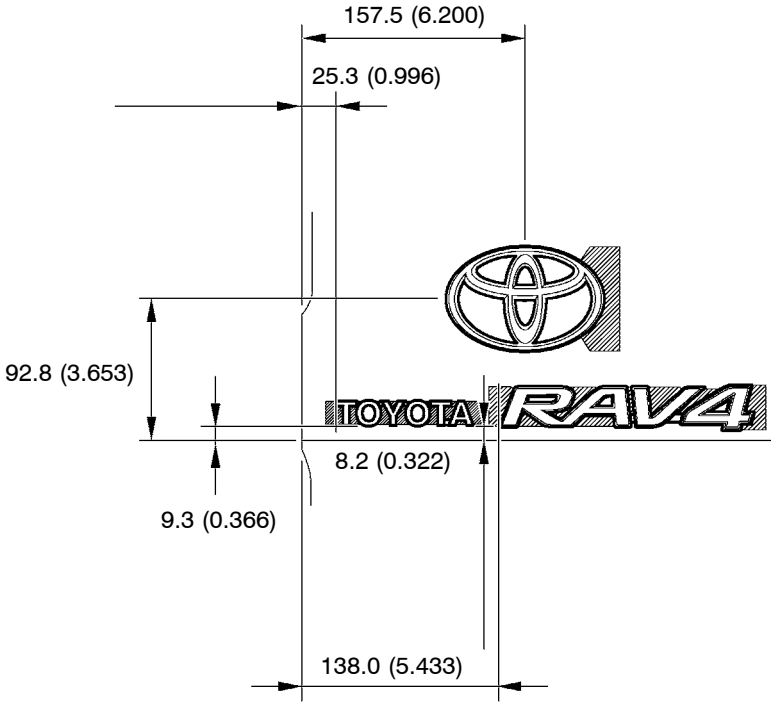



mm (in.)


F24766


[GENERAL, EXPORT]

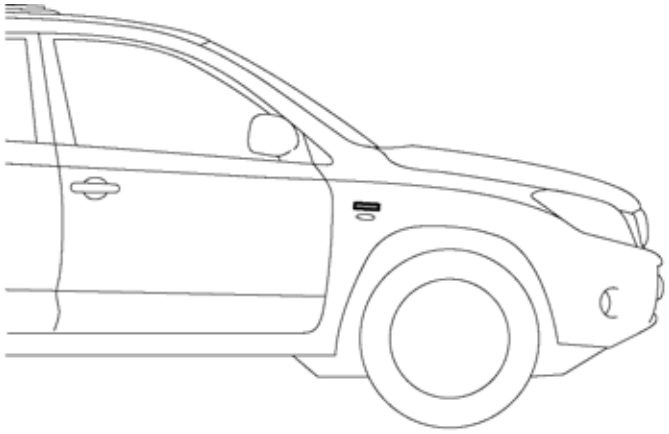

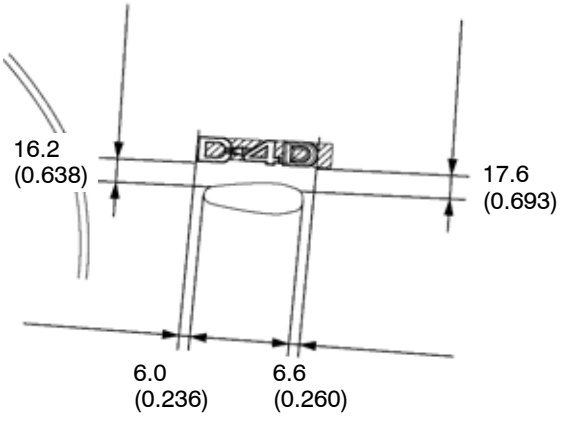

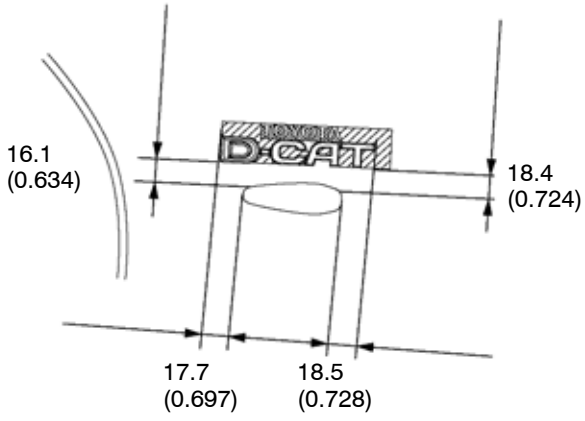

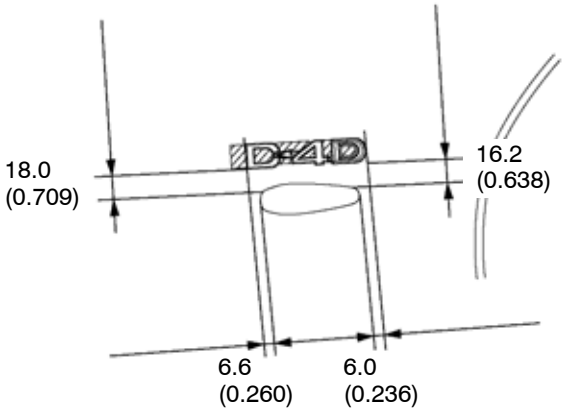

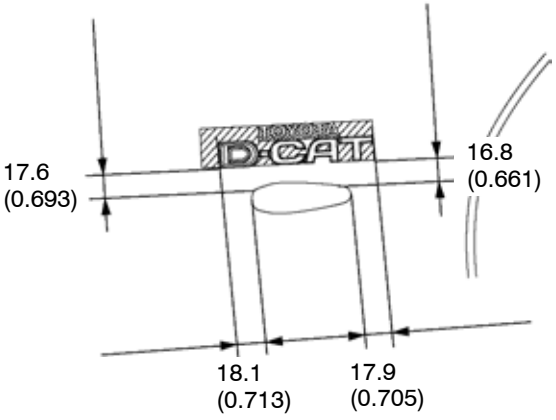

mm (in.)

F24768