
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

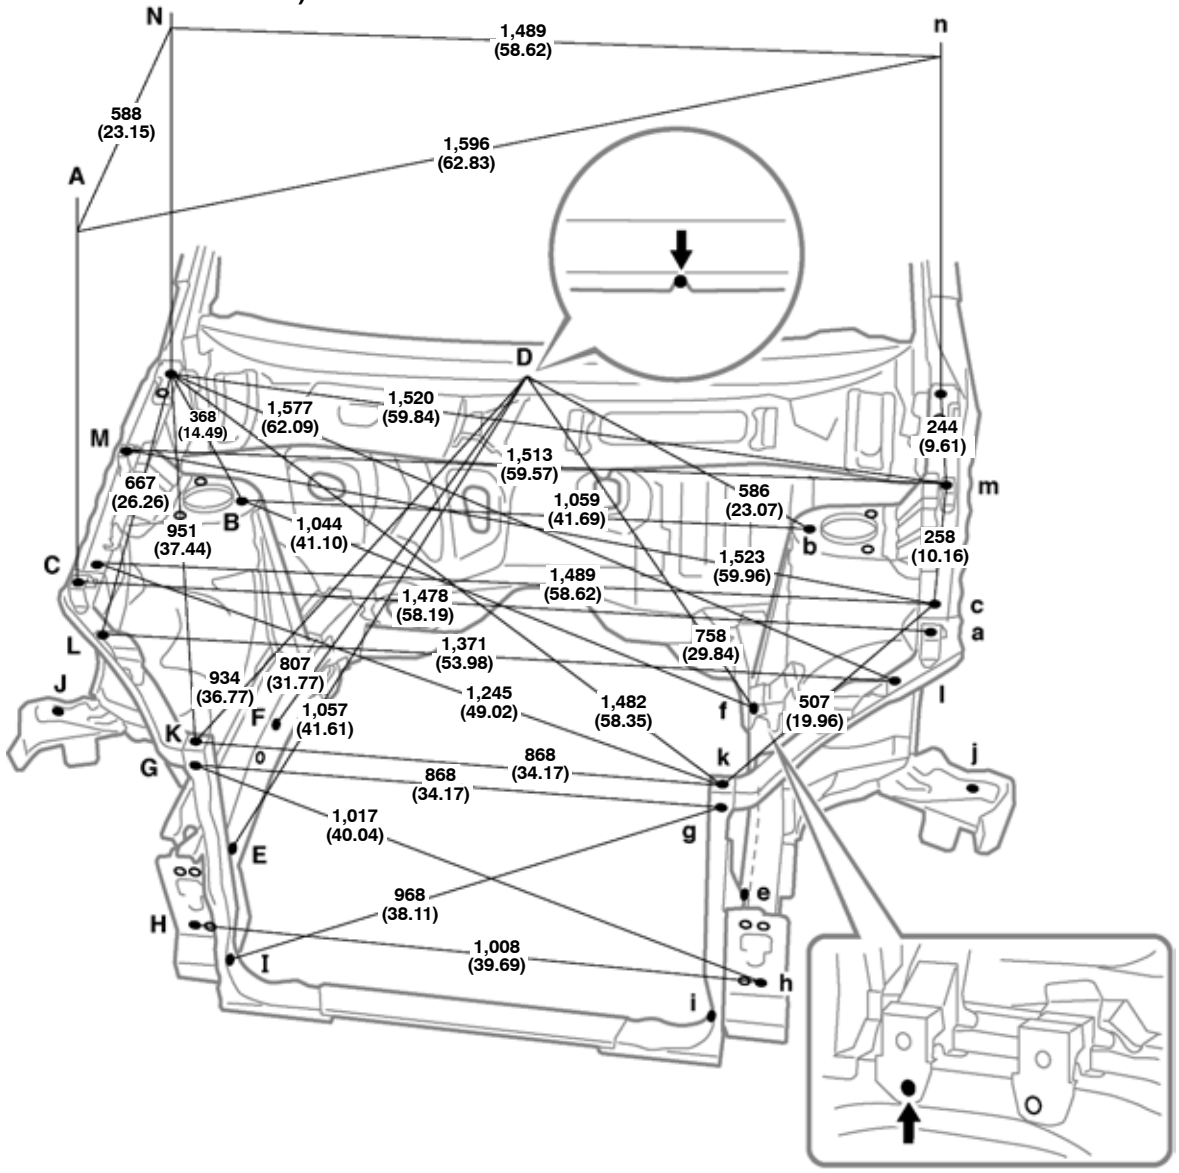

Vehicle Dimensions

A-M or a-m	A-m or a-M	b-F	J-j
345 (13.58)	1,534 (60.39)	1,071 (42.17)	1,596 (62.83)

Height from Imaginary Standard Line

A, a	H, h	K, k	N, n
770 (30.31)	265 (10.43)	691 (27.20)	841 (33.11)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	M6 (0.24)	G, g	Radiator upper support installation nut	M8 (0.31)
B, b	Front spring support hole-inner	ø12.5 (0.492)	H, h	Front bumper reinforcement installation nut	M10 (0.39)
C, c	Front apron to cowl side member standard hole	ø13 (0.51)	I, i	Radiator side support standard hole	ø 12 (0.47)
D	Cowl panel center mark	—	J, j	Front fender extension standard hole	ø 10 (0.39)
E, e	Front side member standard hole	ø18 (0.71)	K, k	Radiator upper support installation nut	M8 (0.31)
F	Front side member standard hole	ø16 (0.63)	L, l	Radiator upper support standard hole	ø 10 (0.39)
f	Engine mounting bracket installation nut	M12 (0.47)	M, m	Front fender installation nut	M6 (0.24)
			N, n	Hood hinge installation nut	M8 (0.31)

BODY OPENING AREAS (Side View: Front)

(Three-Dimensional Distance)

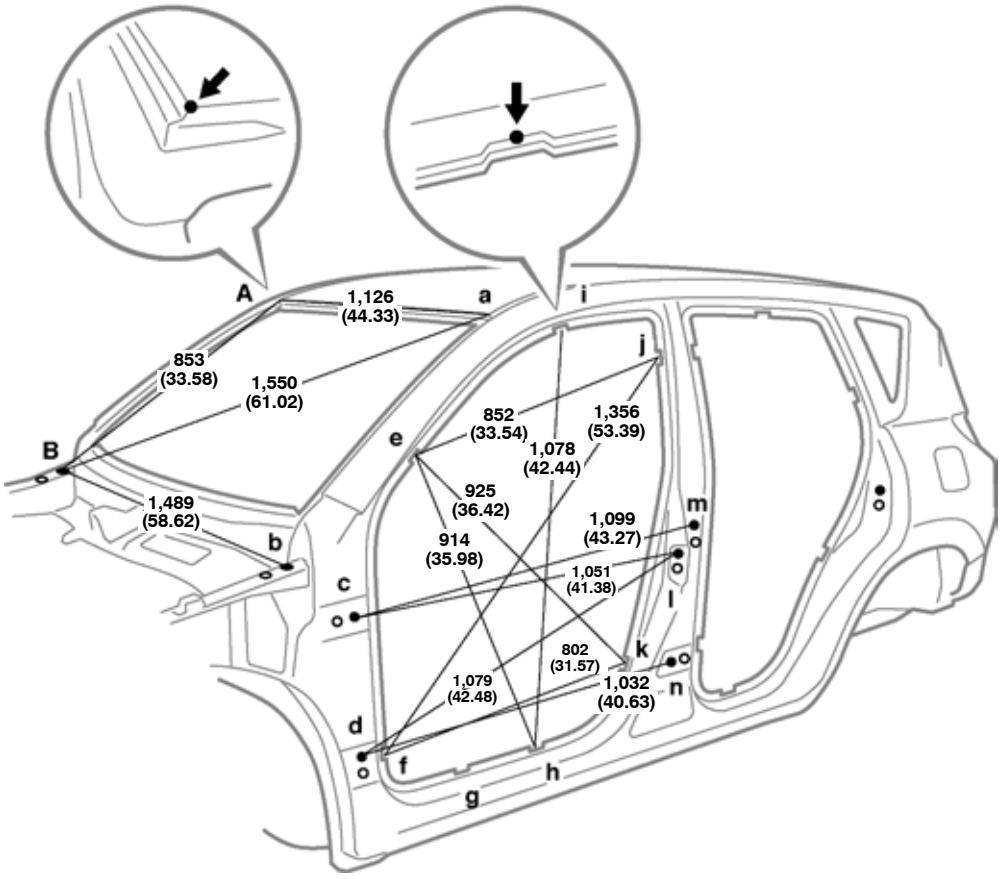

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,365 (53.74)	1,478 (58.19)	1,478 (58.19)	1,479 (58.23)	1,201 (47.28)	1,272 (50.08)	1,479 (58.23)	1,585 (62.40)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	J-k or j-K
1,604 (63.15)	1,689 (66.50)	1,569 (61.77)	1,928 (75.91)	1,682 (66.22)	1,714 (67.48)	1,634 (64.33)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, i	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	N, n	Rear door hinge installation nut	M8 (0.31)
—	—	—	—	—	—

BODY OPENING AREAS (Side View: Rear)

Short Body

(Three-Dimensional Distance)

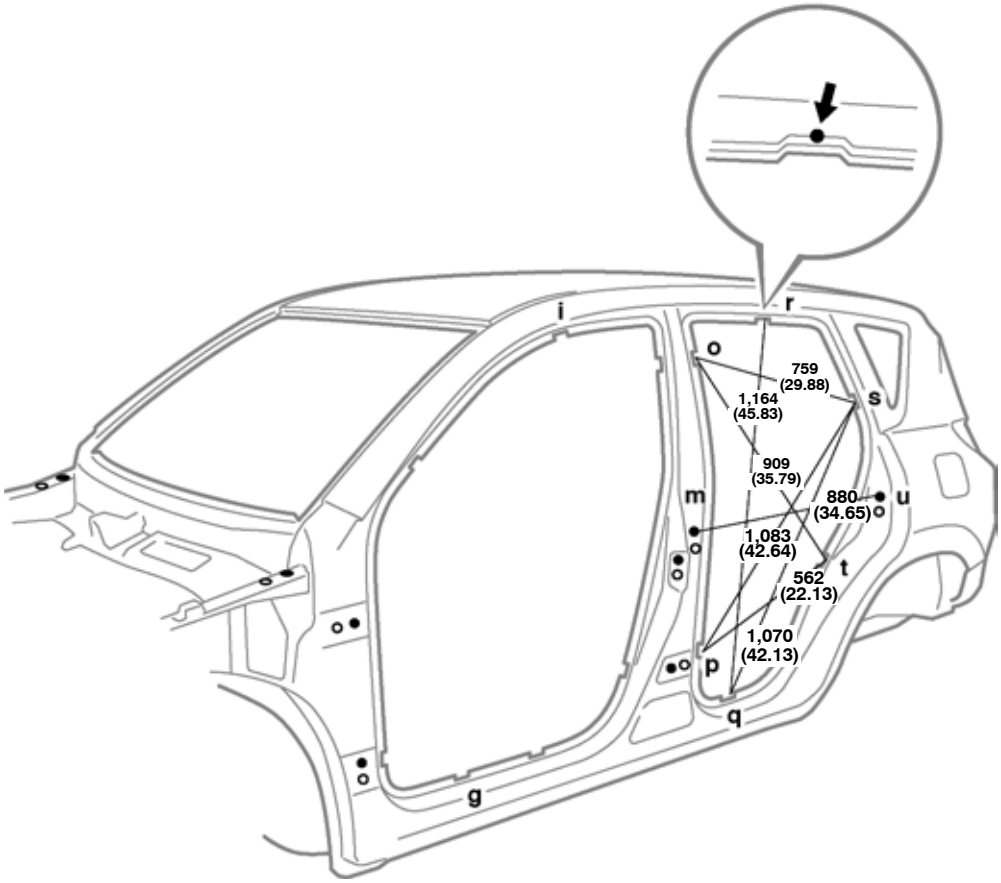

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,272 (50.08)	1,474 (58.03)	1.542 (60.71)	1,169 (46.02)	1,356 (53.39)	1,487 (58.54)	1.597 (62.87)

G-q or g-Q	I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,782 (70.16)	1,446 (56.93)	1,517 (59.72)	1,648 (64.88)	1,584 (62.36)	1,777 (69.96)	1,570 (61.81)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
G, g	Rocker panel assembly mark	—	Q, q	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	R, r	Roof side rail assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Rear)

Long Body

(Three-Dimensional Distance)

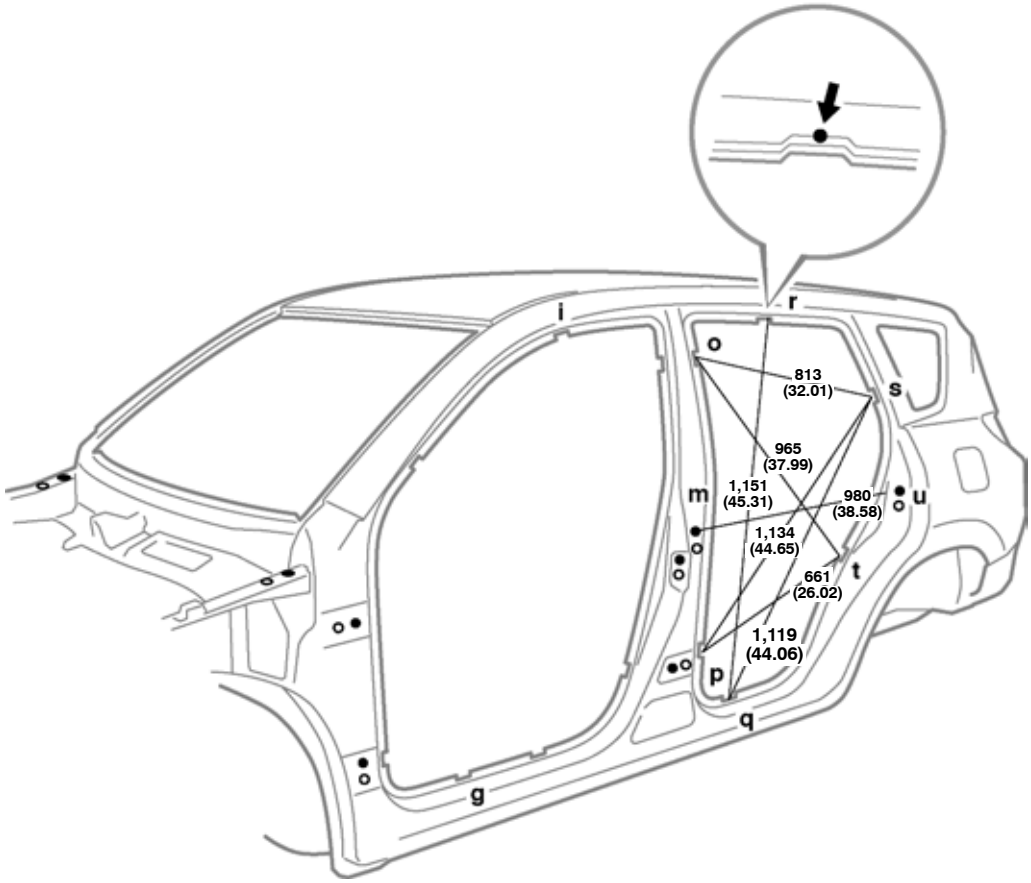

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,272 (50.08)	1,474 (58.03)	1,479 (58.23)	1,169 (46.02)	1,353 (53.27)	1,487 (58.54)	1,597 (62.87)

G-q or g-Q	I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,736 (68.35)	1,447 (56.97)	1,544 (60.79)	1,680 (66.14)	1,621 (63.82)	1,747 (68.78)	1,566 (61.65)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
G, g	Rocker panel assembly mark	—	Q, q	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	R, r	Roof side rail assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

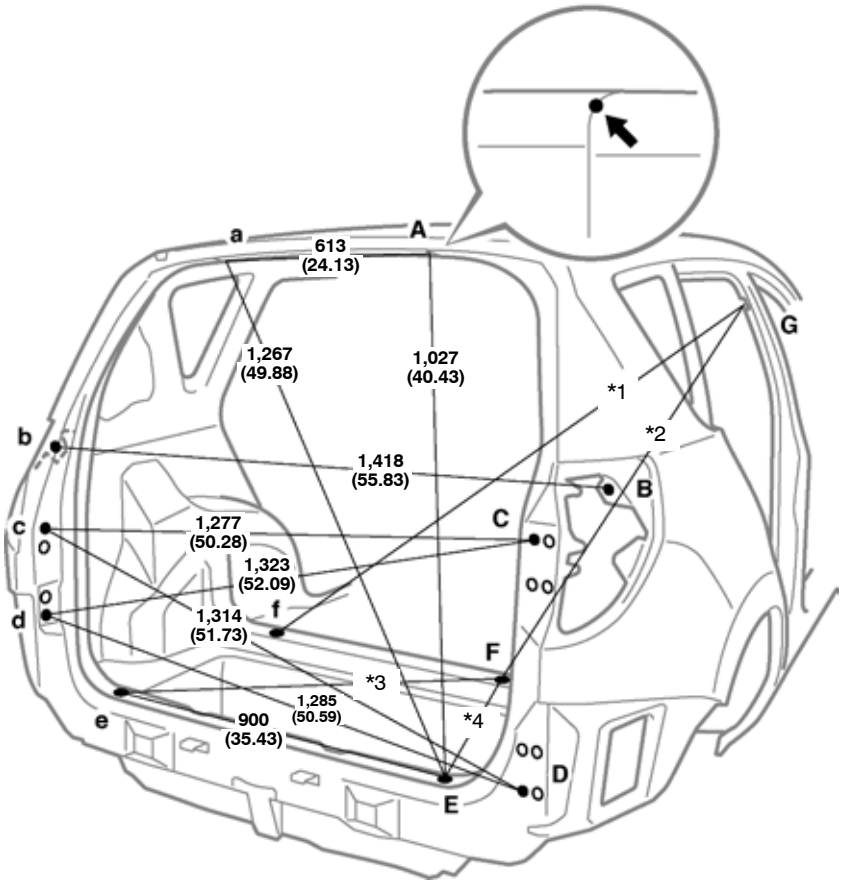

	Short Body	Long Body
*1	1,632 (64.25)	1,694 (66.69)
*2	1,341 (52.80)	1,416 (55.75)
*3	962 (37.87)	1,028 (40.47)
*4	560 (22.05)	667 (26.26)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
A, a	Roof side inner reinforcement corner	—	D	Back door hinge installation nut	M8 (0.31)
B, b	Quarter panel standard hole	ø 13 (0.51)	d	Back door lock striker installation nut	M8 (0.31)
C	Back door hinge installation nut	M8 (0.31)	E, e	Rear finish plate installation hole	ø 8.5 (0.335)
c	Back door lock striker installation nut	M8 (0.31)	F, f	Rear floor crossmember No.1 standard hole	ø 13 (0.51)
			G, g	Center body pillar assembly mark	—

UNDER BODY

Short Body


(Three-Dimensional Distance)

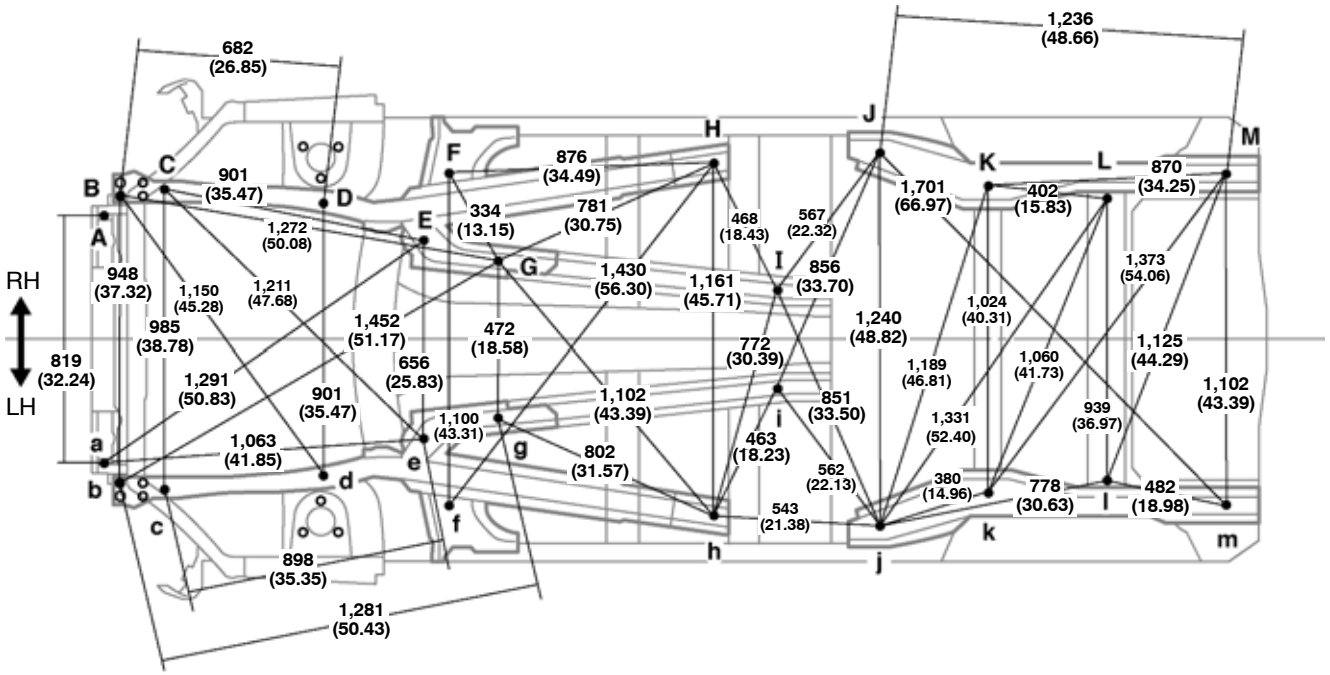

Vehicle Dimensions

b-D	b-d	c-E	F-g	f-G	f-g	g-H	H-i	H-j or h-J	I-i
1,147 (45.16)	682 (26.85)	1,201 (47.28)	780 (30.71)	827 (32.56)	377 (14.84)	1,066 (41.97)	777 (30.59)	1,317 (51.85)	330 (12.99)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

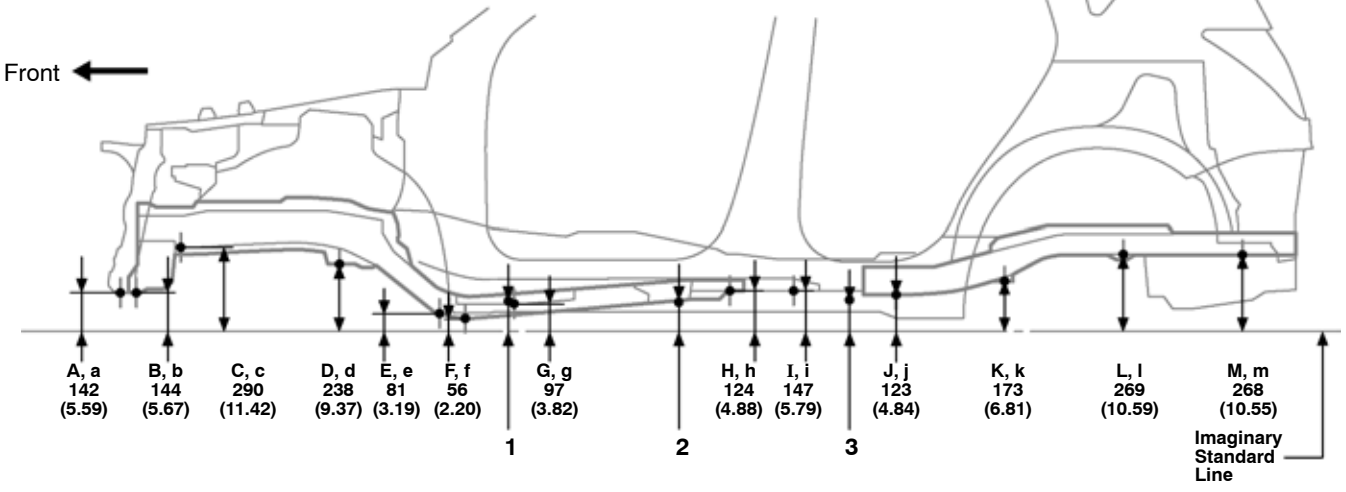

HINT: Point B, b, C, c, G, g and I, i on the vehicle are asymmetrical.


mm (in.)

Symbol	Name	Hole dia.			
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	G, g	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	H, h	Front floor under reinforcement standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	I, i	Front floor reinforcement No.3 standard hole	ø15 (0.59)
D, d	Front suspension member installation nut	M14 (0.55)	J, j	Rear floor side member standard hole	ø18 (0.71)
E, e	Front suspension member installation nut	M14 (0.55)	K, k	Rear suspension member installation nut	M14 (0.55)
F, f	Torque box front standard hole	ø25 (0.98)	L, l	Rear suspension member installation nut	M14 (0.55)
			M, m	Rear floor side member standard hole	ø18 (0.71)

UNDER BODY

Long Body


(Three-Dimensional Distance)

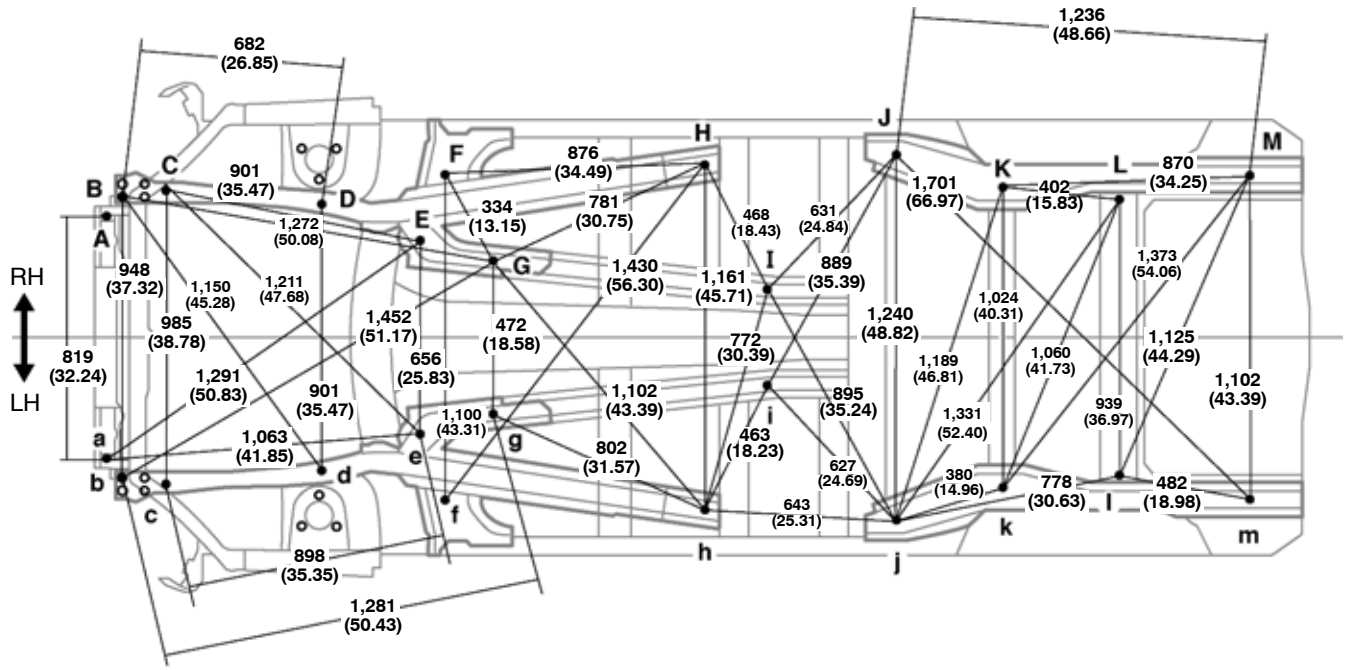

Vehicle Dimensions

b-D	b-d	c-E	F-g	f-G	f-g	g-H	H-i	H-j or h-J	I-i
1,147 (45.16)	682 (26.85)	1,201 (47.28)	780 (30.71)	827 (32.56)	377 (14.84)	1,066 (41.97)	777 (30.59)	1,361 (53.58)	330 (12.99)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

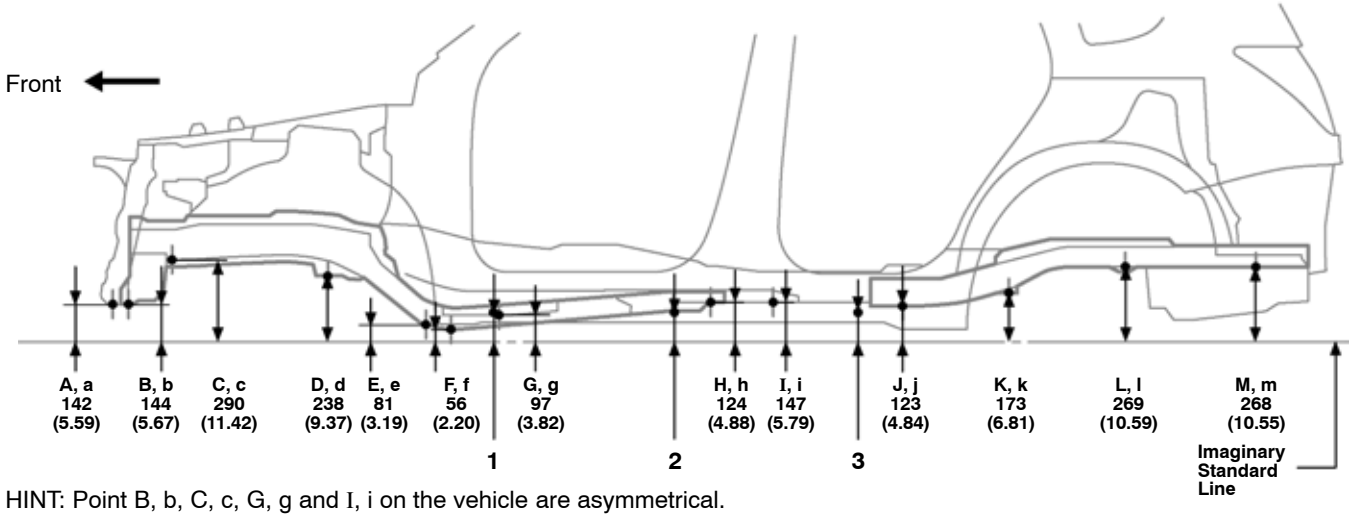

HINT: Point B, b, C, c, G, g and I, i on the vehicle are asymmetrical.


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	G, g	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	H, h	Front floor under reinforcement standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	I, i	Front floor reinforcement No.3 standard hole	ø15 (0.59)
D, d	Front suspension member installation nut	M14 (0.55)	J, j	Rear floor side member standard hole	ø18 (0.71)
E, e	Front suspension member installation nut	M14 (0.55)	K, k	Rear suspension member installation nut	M14 (0.55)
F, f	Torque box front standard hole	ø25 (0.98)	L, l	Rear suspension member installation nut	M14 (0.55)
			M, m	Rear floor side member standard hole	ø18 (0.71)

UNDER BODY


Short Body: 2WD

(Two-Dimensional Distance)

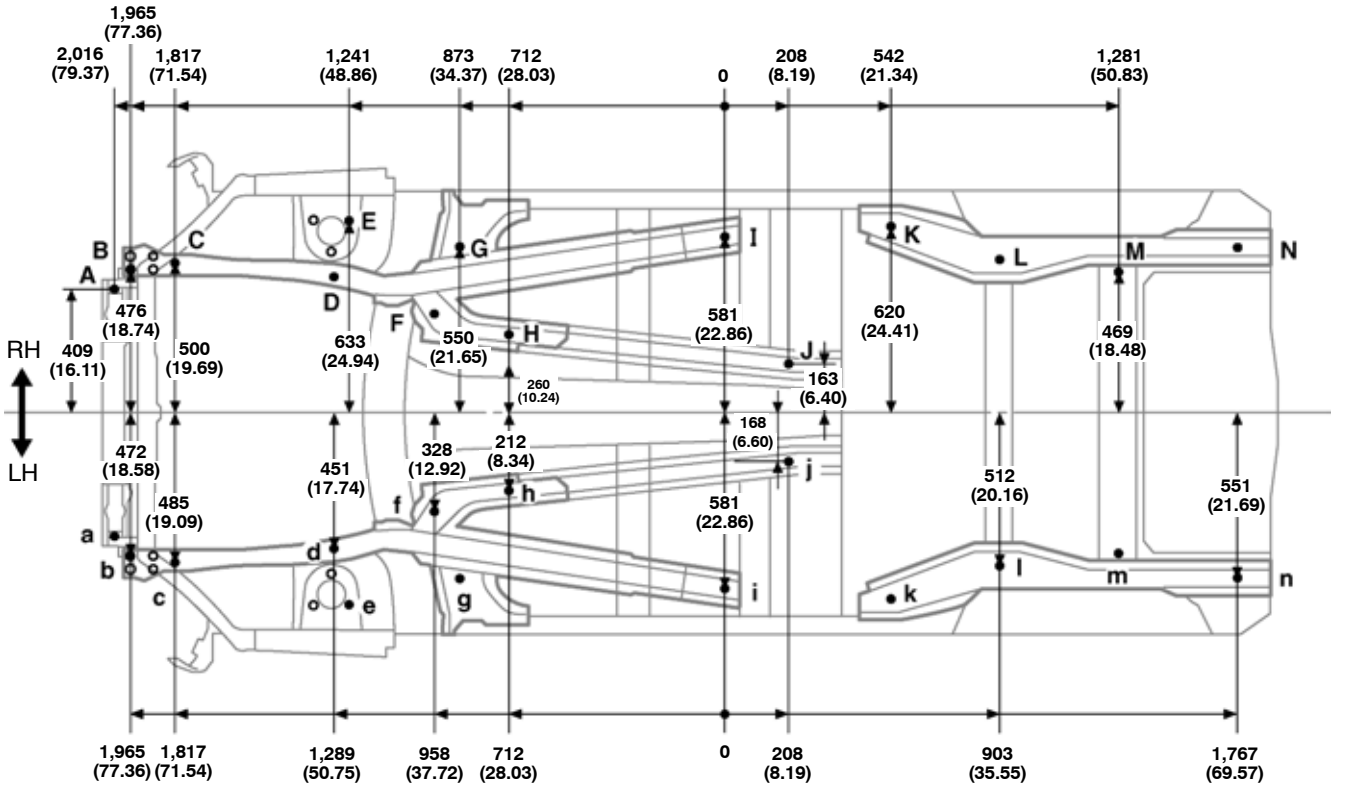

Wheel base	2,560 (100.79)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

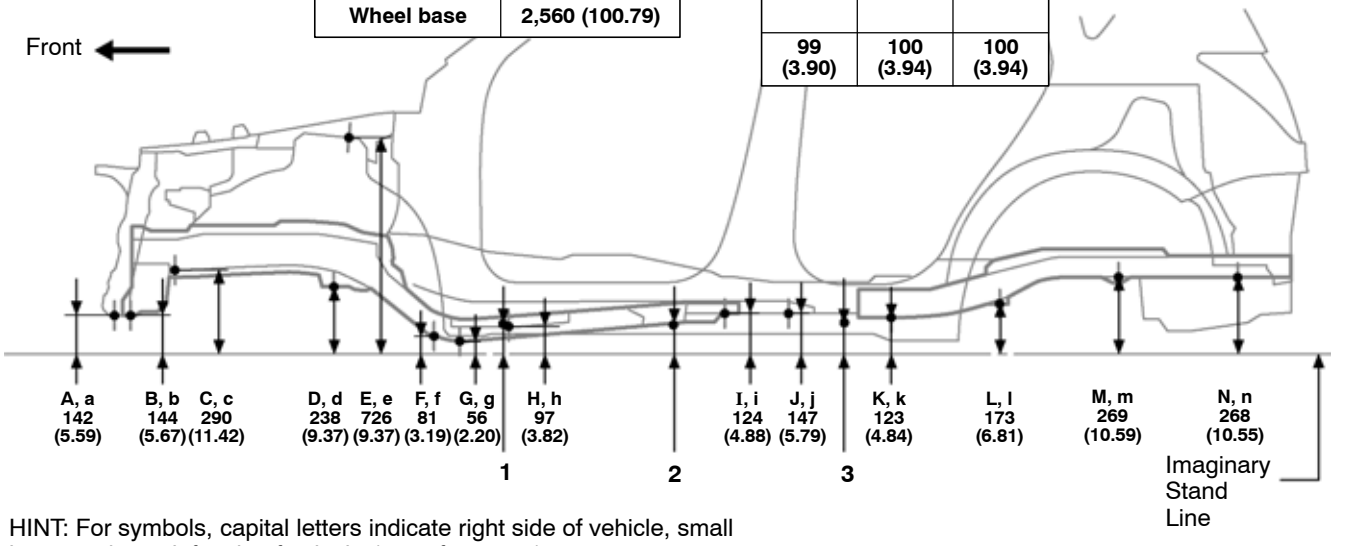

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	H, h	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	I, i	Front floor under reinforcement standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	J, j	Front floor reinforcement No. 3 standard hole	ø15 (0.59)
D, d	Front suspension member installation nut	14 (0.55)	K, k	Rear floor side member standard hole	ø18 (0.71)
E, e	Front spring support hole inner rear	ø12.5 (0.492)	L, l	Rear suspension member installation nut	M14 (0.55)
F, f	Front suspension member installation nut	M14 (0.55)	M, m	Rear suspension member installation nut	M14 (0.55)
G, g	Torque box front standard hole	ø25 (0.98)	N, n	Rear floor side member standard hole	ø18 (0.71)
—	—	—	—	—	—

UNDER BODY

Short Body: 4WD

(Two-Dimensional Distance)

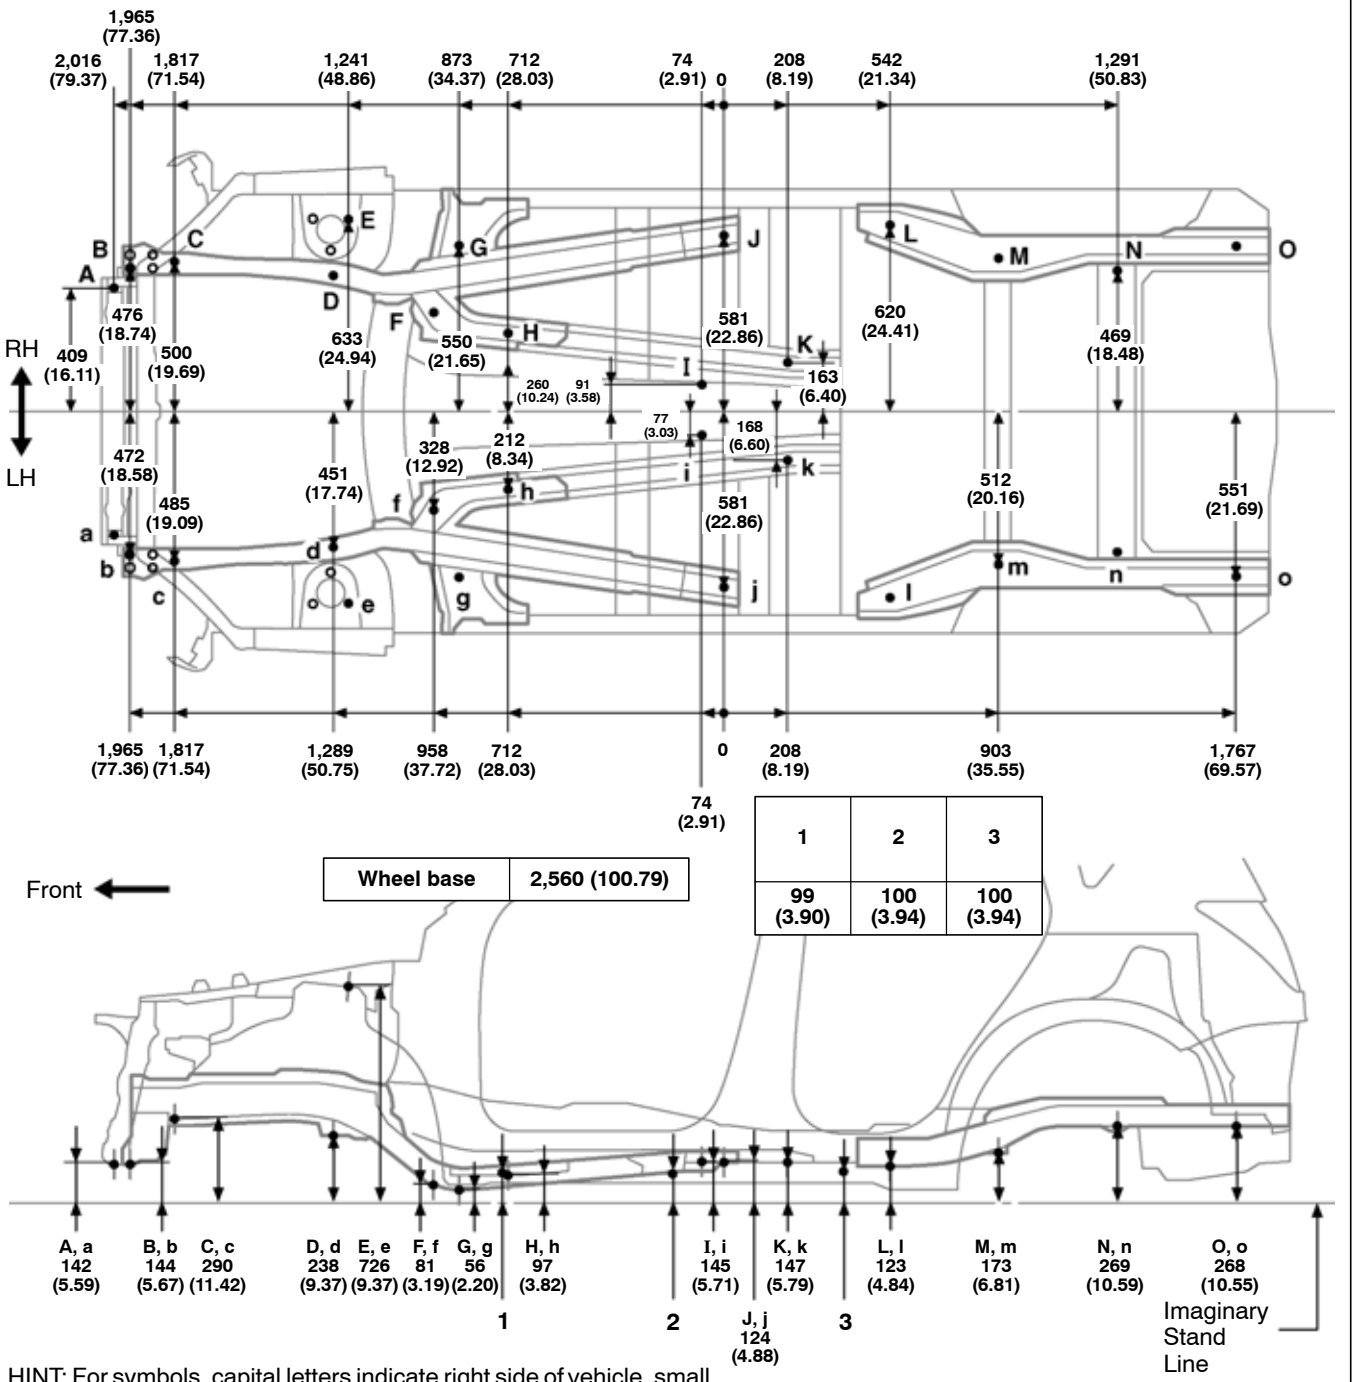

Wheel base	2,560 (100.79)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	H, h	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	I, i	Propeller shaft center support bearing installation nut	M10 (0.39)
C, c	Front side member standard hole	ø18 (0.71)	J, j	Front floor under reinforcement standard hole	ø18 (0.71)
D, d	Front suspension member installation nut	M14 (0.55)	K, k	Front floor reinforcement No. 3 standard hole	ø15 (0.59)
E, e	Front spring support hole inner rear	ø12.5 (0.492)	L, l	Rear floor side member standard hole	ø18 (0.71)
F, f	Front suspension member installation nut	M14 (0.55)	M, m	Rear suspension member installation nut	M14 (0.55)
G, g	Torque box front standard hole	ø25 (0.98)	N, n	Rear suspension member installation nut	M14 (0.55)
			O, o	Rear floor side member standard hole	ø18 (0.71)

UNDER BODY


Long Body: 2WD

(Two-Dimensional Distance)

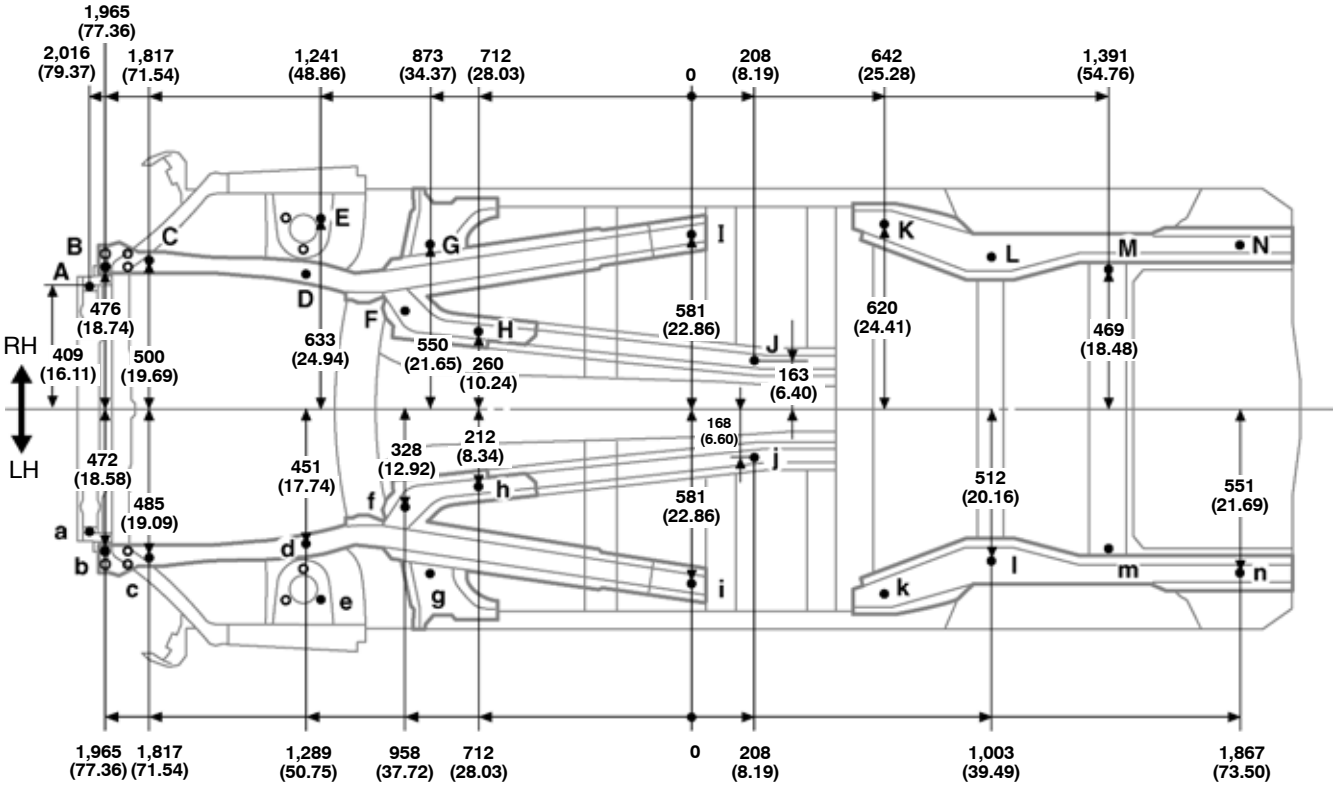

Wheel base	2,660 (104.72)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

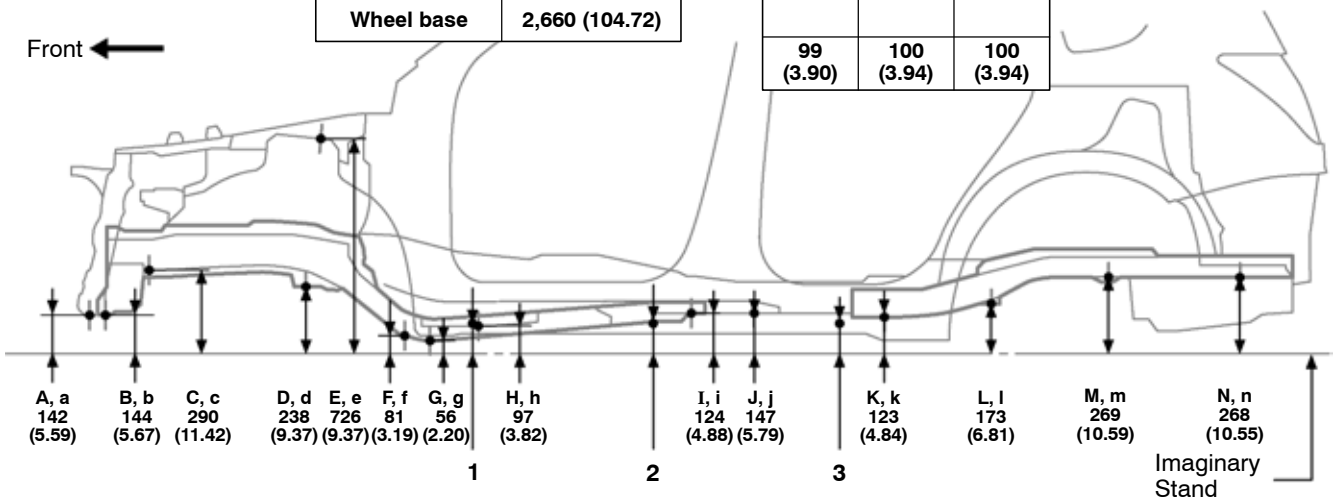

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	H, h	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	I, i	Front floor under reinforcement standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	J, j	Front floor reinforcement No. 3 standard hole	ø15 (0.59)
D, d	Front suspension member installation nut	M14 (0.55)	K, k	Rear floor side member standard hole	ø18 (0.71)
E, e	Front spring support hole inner rear	ø12.5 (0.492)	L, l	Rear suspension member installation nut	M14 (0.55)
F, f	Front suspension member installation nut	M14 (0.55)	M, m	Rear suspension member installation nut	M14 (0.55)
G, g	Torque box front standard hole	ø25 (0.98)	N, n	Rear floor side member standard hole	ø18 (0.71)
			—	—	—

UNDER BODY


Long Body: 4WD

(Two-Dimensional Distance)

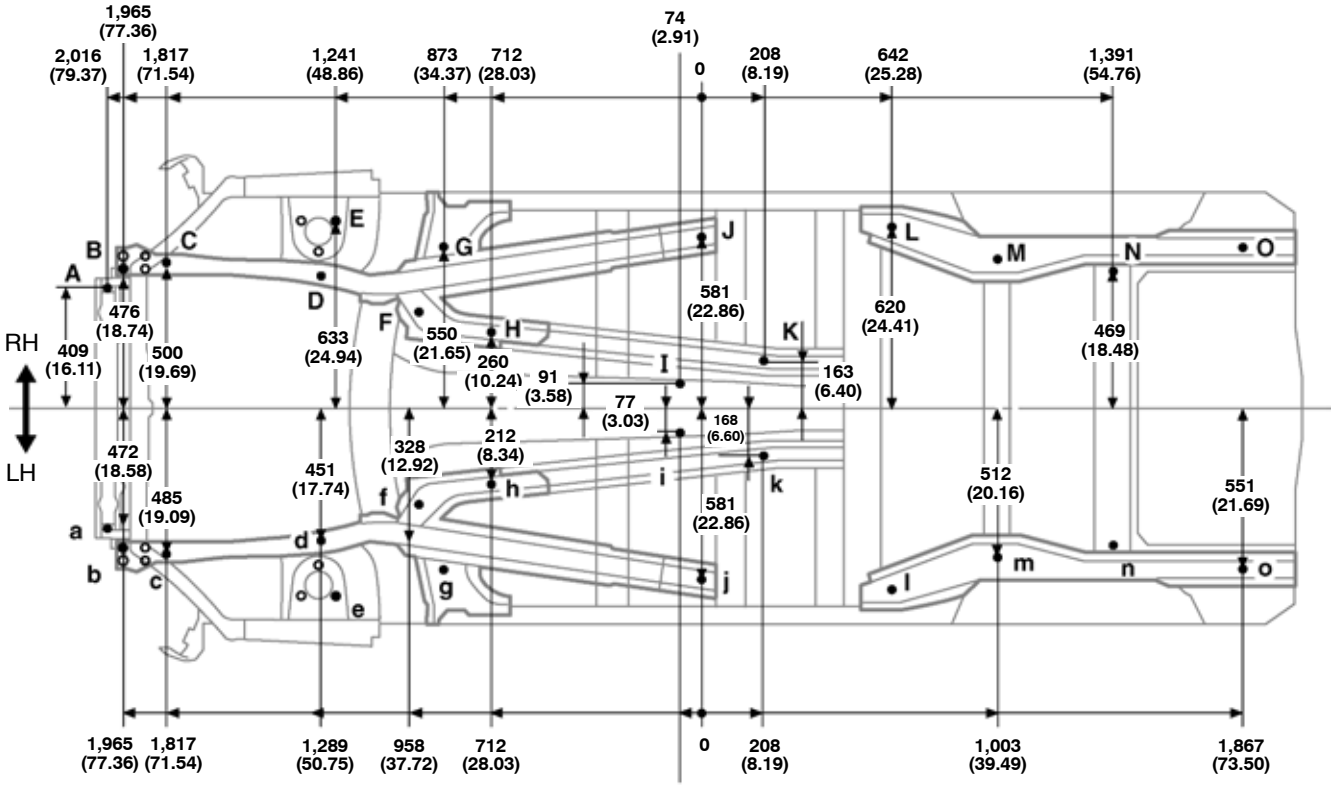

Wheel base	2,660 (104.72)

1	2	3
99 (3.90)	100 (3.94)	100 (3.94)

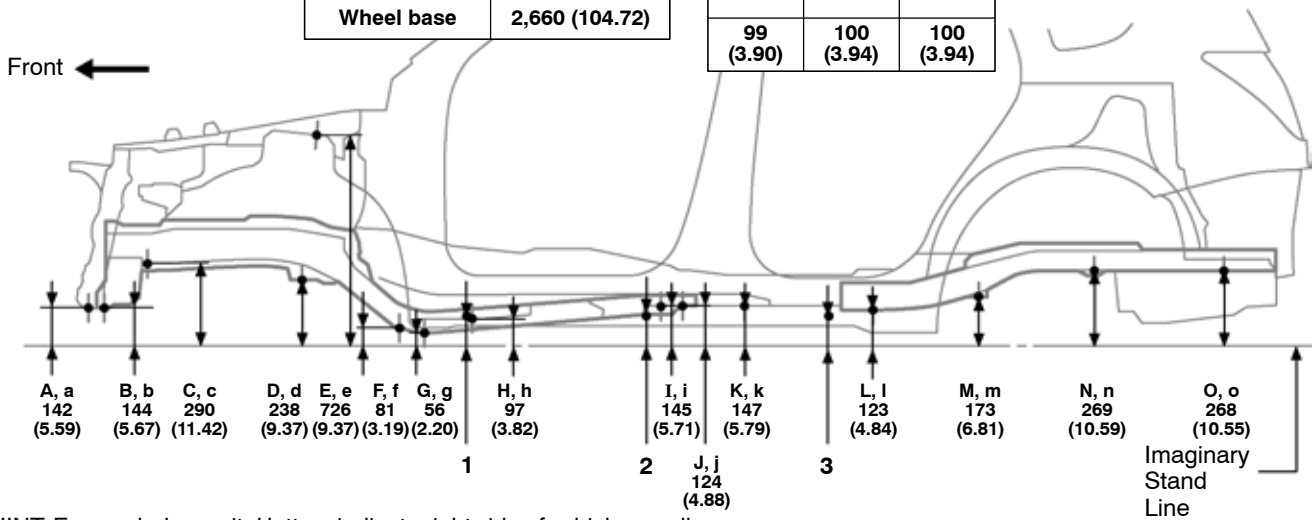

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front body mounting reinforcement standard hole	ø13 (0.51)	H, h	Front side member standard hole	ø23 (0.91)
B, b	Front crossmember installation nut	M12 (0.47)	I, i	Propeller shaft center support bearing installation nut	M10 (0.39)
C, c	Front side member standard hole	ø18 (0.71)	J, j	Front floor under reinforcement standard hole	ø18 (0.71)
D, d	Front suspension member installation nut	M14 (0.55)	K, k	Front floor reinforcement No. 3 standard hole	ø15 (0.59)
E, e	Front spring support hole inner rear	ø12.5 (0.492)	L, l	Rear floor side member standard hole	ø18 (0.71)
F, f	Front suspension member installation nut	M14 (0.55)	M, m	Rear suspension member installation nut	M14 (0.55)
G, g	Torque box front standard hole	ø25 (0.98)	N, n	Rear suspension member installation nut	M14 (0.55)
			O, o	Rear floor side member standard hole	ø18 (0.71)