
BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT

(Three - Dimensional Distance)

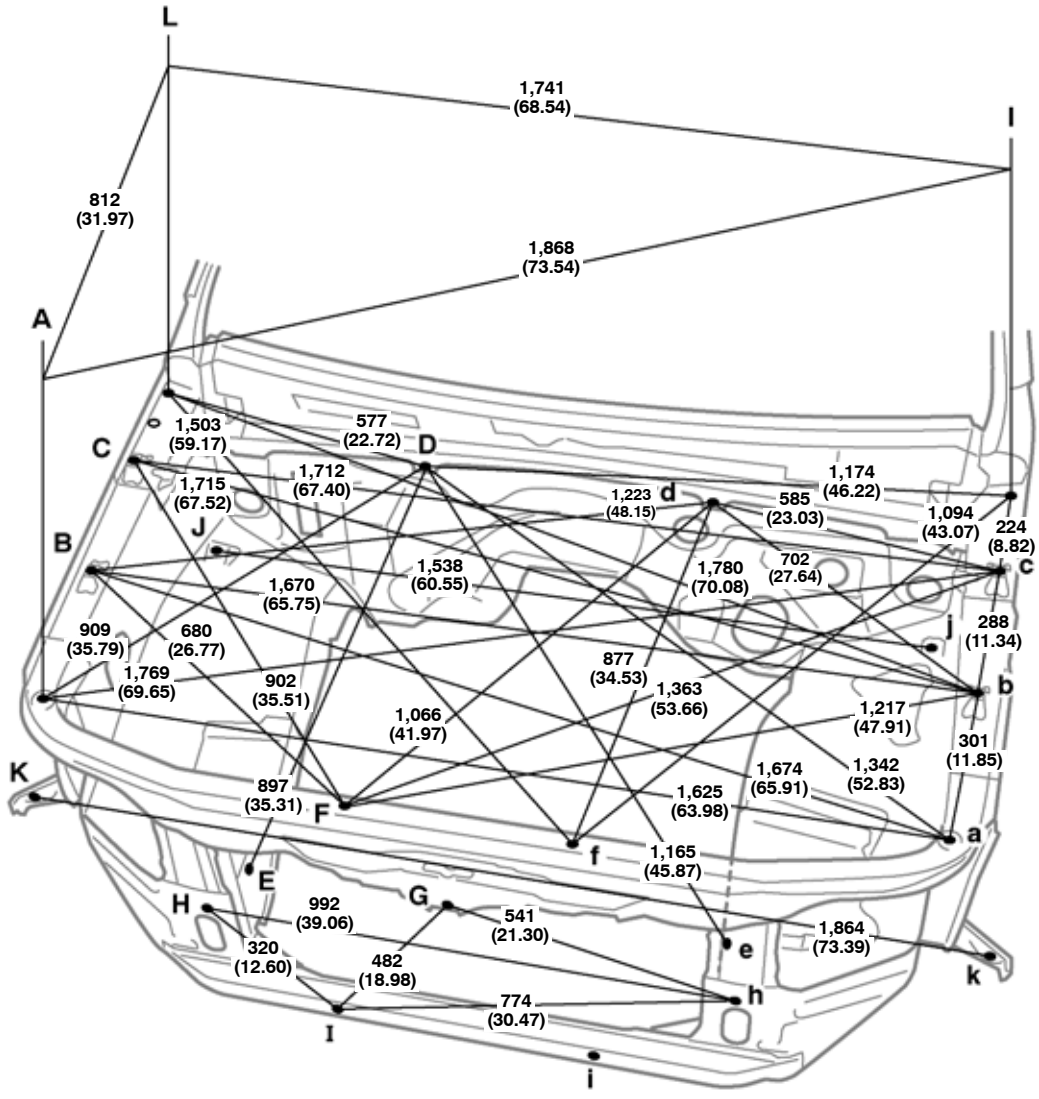

Vehicle Dimensions

A-C or a-c	B-L or b-l
589 (23.19)	511 (20.12)

Height from Imaginary Datum Line

A,a	L,l
961 (37.83)	1,043 (41.06)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front fender installation nut	M6 (0.24)	G	Radiator support brace installation nut	M6 (0.24)
B, b	Front fender installation nut	M6 (0.24)	H, h	Radiator support standard hole	ø10 (0.39)
C, c	Front fender installation nut	M6 (0.24)	I, i	Front crossmember standard hole	ø10 (0.39)
D, d	Cowl louver installation nut	M6 (0.24)	J, j	Front fender apron standard hole	ø15 (0.59)
E, e	Front fender No. 2 side apron standard hole	ø10 (0.39)	K, k	Front fender bracket standard hole	ø10 (0.39)
F, f	Radiator support standard hole	ø10 (0.39)	L, l	Hood hinge installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Front)

(Three - Dimensional Distance)

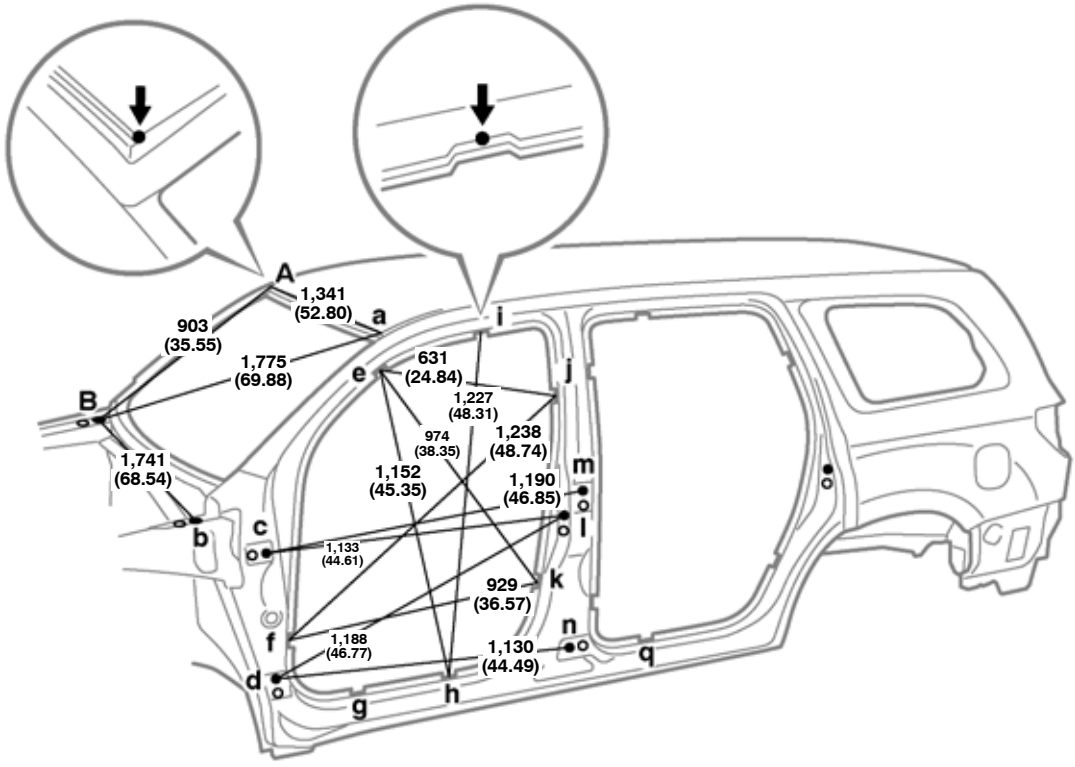

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,476 (58.11)	1,662 (65.43)	1,662 (65.43)	1,662 (65.43)	1,410 (55.51)	1,615 (63.58)	1,689 (66.50)	1,803 (70.98)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-q or g-Q	H-i or h-I	J-k or j-K
1,834 (72.20)	1,944 (76.54)	1,668 (65.67)	2,054 (80.87)	1,916 (75.43)	1,971 (77.60)	1,962 (77.24)	1,783 (70.20)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	N, n	Rear door hinge installation nut	M8 (0.31)
			Q, q	Rocker panel assembly mark	—

BODY OPENING AREAS (Side View: Rear)

(Three - Dimensional Distance)

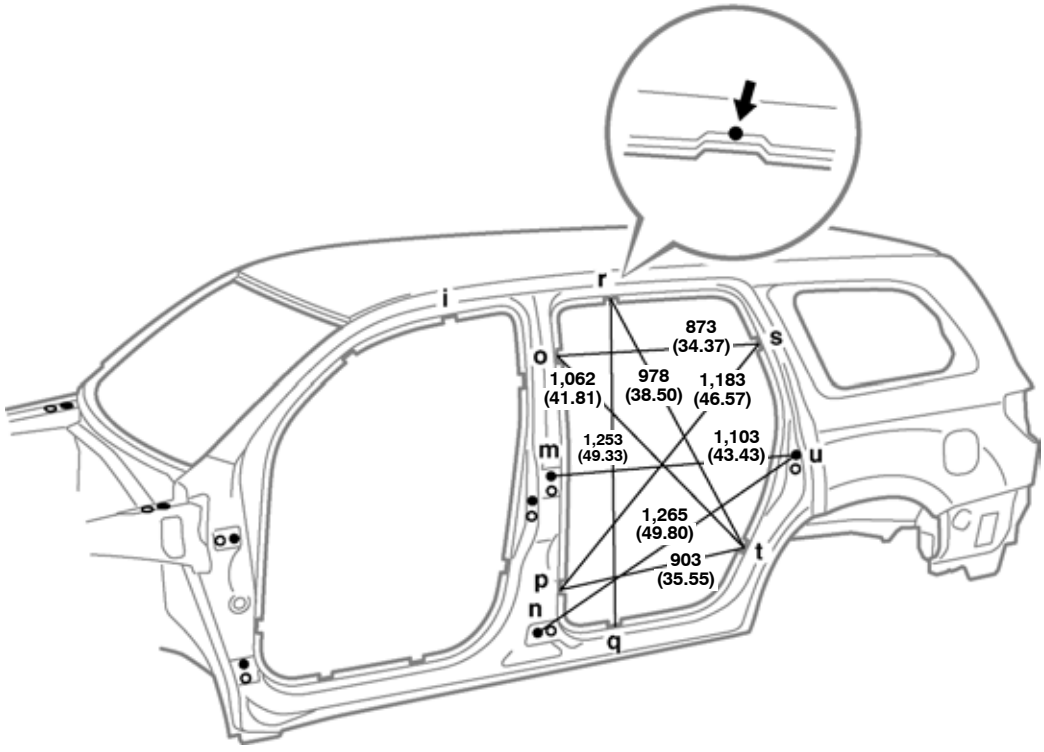

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,617 (63.66)	1,689 (66.50)	1,662 (65.43)	1,406 (55.35)	1,549 (60.98)	1,734 (68.27)	1,817 (71,54)

I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,638 (64.49)	1,807 (71.14)	1,983 (78.07)	1,935 (76.18)	1,976 (77.80)	1,788 (70.39)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
I, i	Roof side rail assembly mark	—	Q, q	Rocker panel assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	R, r	Roof side rail assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Rear View)

(Three - Dimensional Distance)

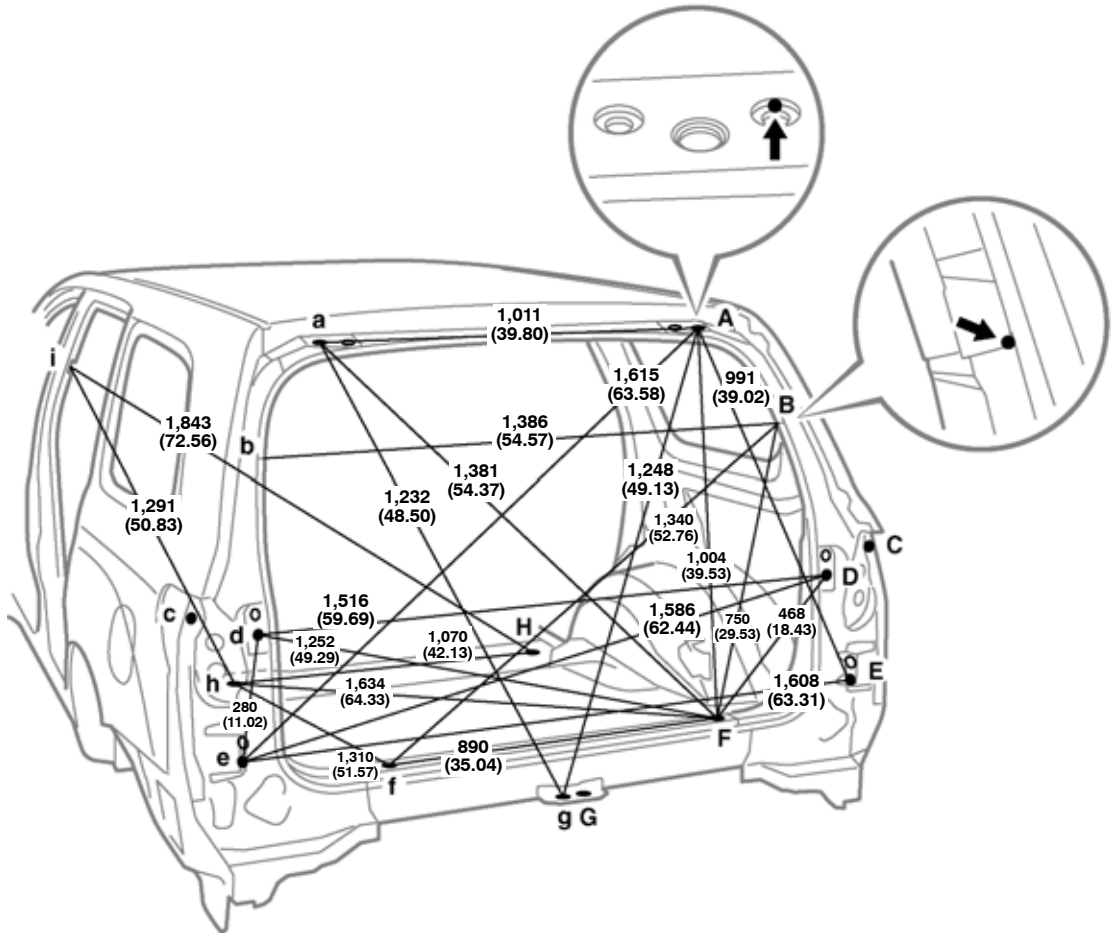

Vehicle Dimensions

b-F	b-f	B-G	b-G	b-g	B-g	C-c
1,339 (52.72)	748 (29.45)	1,069 (42.09)	1,093 (43.03)	1,068 (42.05)	1,094 (43.07)	1,794 (70.63)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Back door hinge installation hole	ø12 (0.47)	E, e	Back door side stopper installation nut	M6 (0.24)
B, b	Quarter panel reinforcement corner	—	F, f	Rear floor panel extension standard hole	ø15 (0.59)
C, c	Quarter panel standard hole	ø13 (0.51)	G, g	Back door rock striker installation nut	M8 (0.31)
D, d	Back door damper stay installation nut	M8 (0.31)	H, h	Rear floor pan standard hole	ø30 (1.18)
			I, i	Center body pillar assembly mark	—

FRAME DIMENSION-Upper Face

(Three - Dimensional Distance)

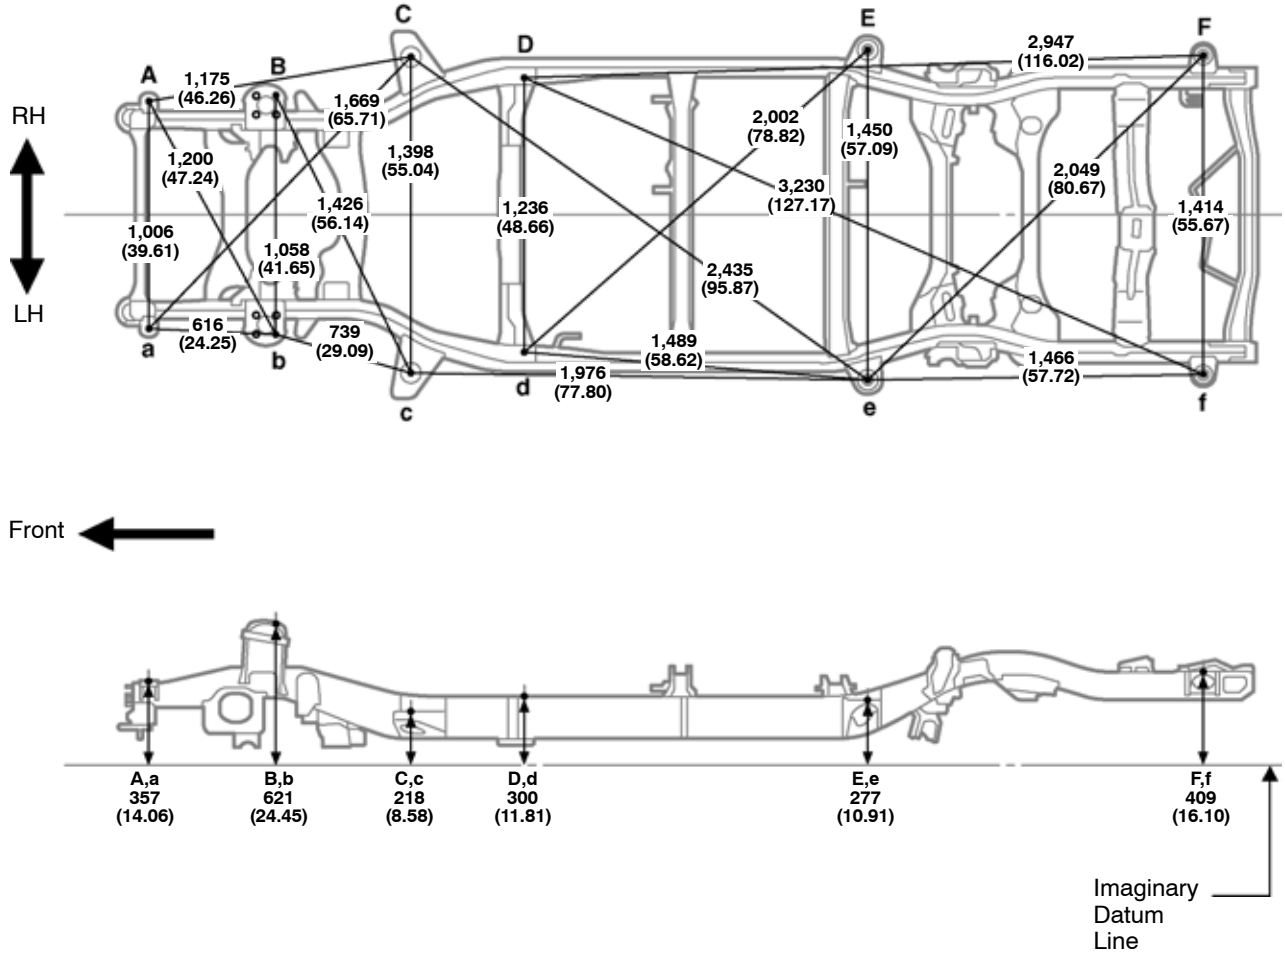


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	No. 1 body mounting hole	ø26 (1.02)	D, d	Side rail inner channel standard hole	30 x 20 (1.18 x 0.79)
B, b	Front spring support hole - outer	ø12.2 (0.480)	E, e	No. 4 body mounting hole	ø43 (1.69)
C, c	No. 2 body mounting hole	ø43 (1.69)	F, f	No. 6 body mounting hole	ø43 (1.69)
			—	—	—

FRAME DIMENSION-Upper Face

(Two - Dimensional Distance)

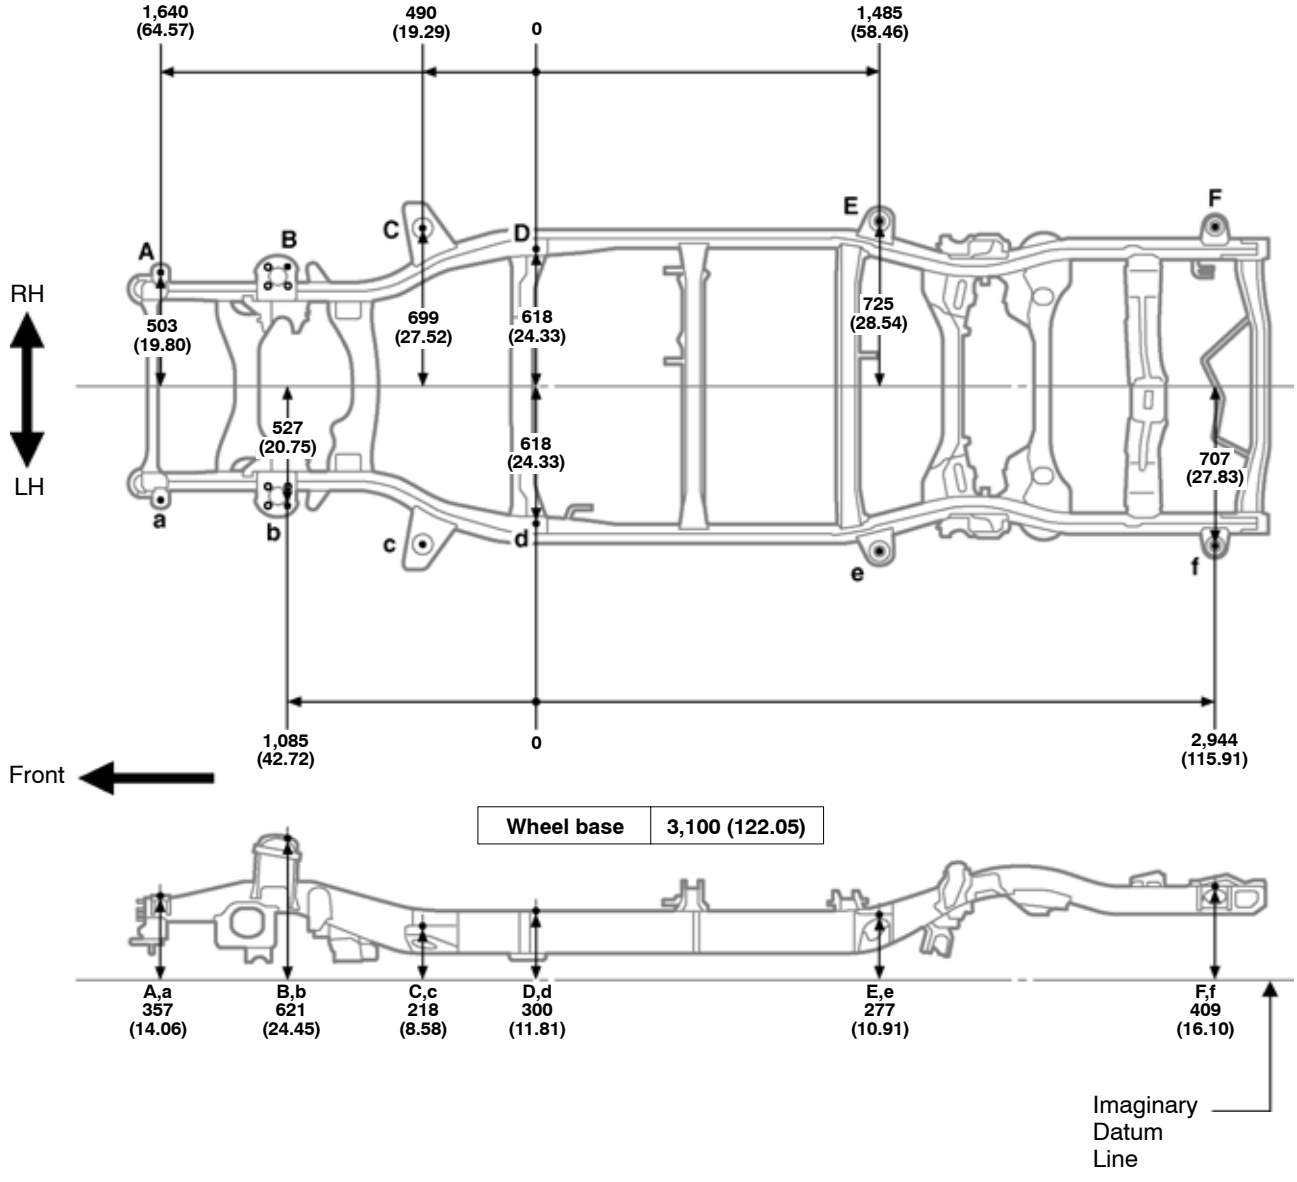


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	No. 1 body mounting hole	ø26 (1.02)	D, d	Side rail inner channel standard hole	30 x 20 (1.18 x 0.79)
B, b	Front spring support hole - outer	ø12.2 (0.480)	E, e	No. 4 body mounting hole	ø43 (1.69)
C, c	No. 2 body mounting hole	ø43 (1.69)	F, f	No. 6 body mounting hole	ø43 (1.69)
			—	—	—

FRAME DIMENSION-Lower Face

(Three - Dimensional Distance)

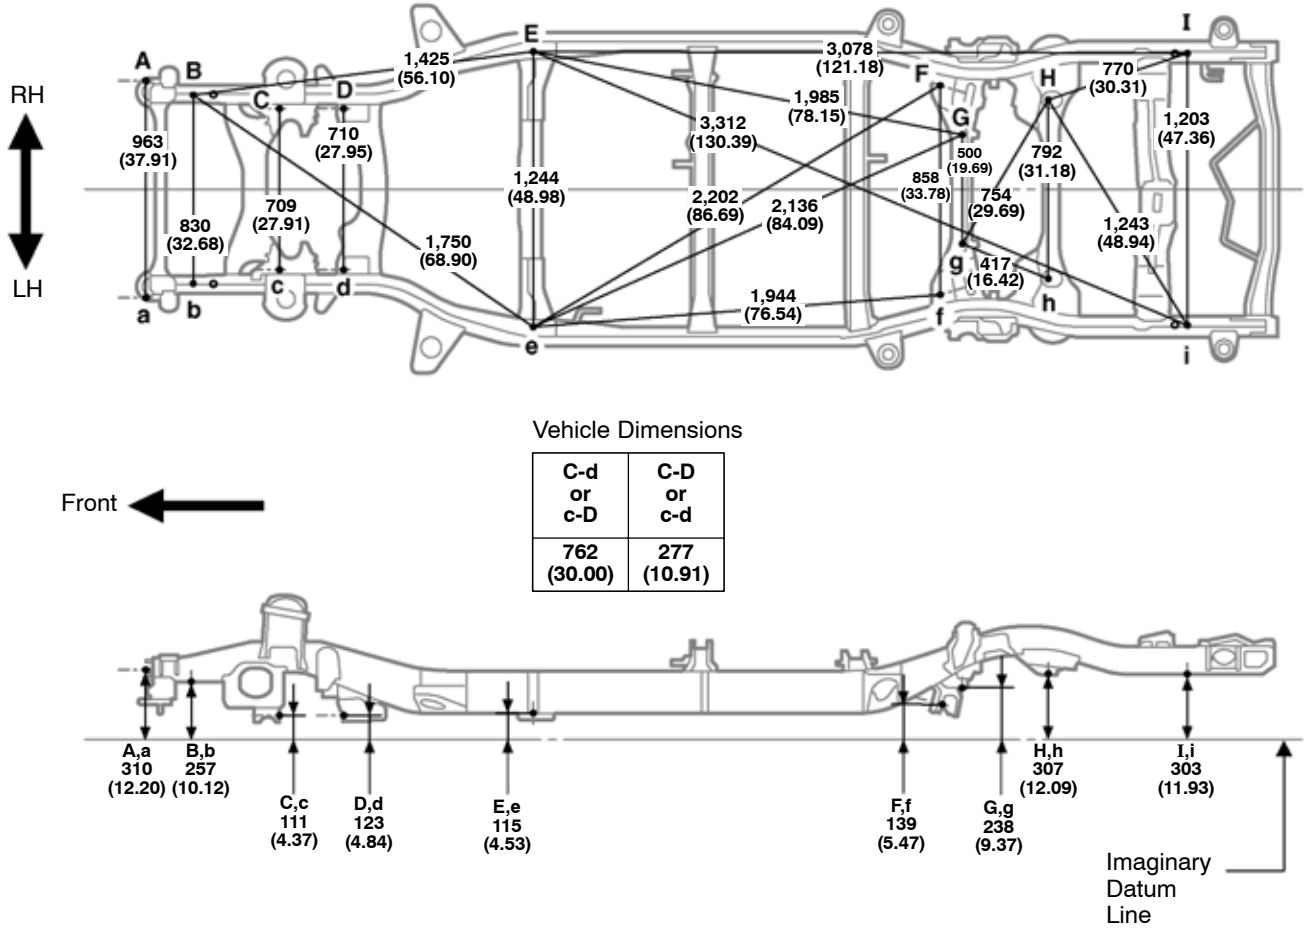

Vehicle Dimensions

C-d or c-D	C-D or c-d
762 (30.00)	277 (10.91)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation bolt	M10 (0.39)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	F, f	Suspension upper arm installation hole - rear	ø19.5 (0.768)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	G, g	Rear suspension member installation hole	ø26 (1.02)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	H, h	Rear suspension member installation hole	ø28 (1.10)
			I, i	Transport hook installation nut	ø18 (0.71)

FRAME DIMENSION-Lower Face

(Two - Dimensional Distance)

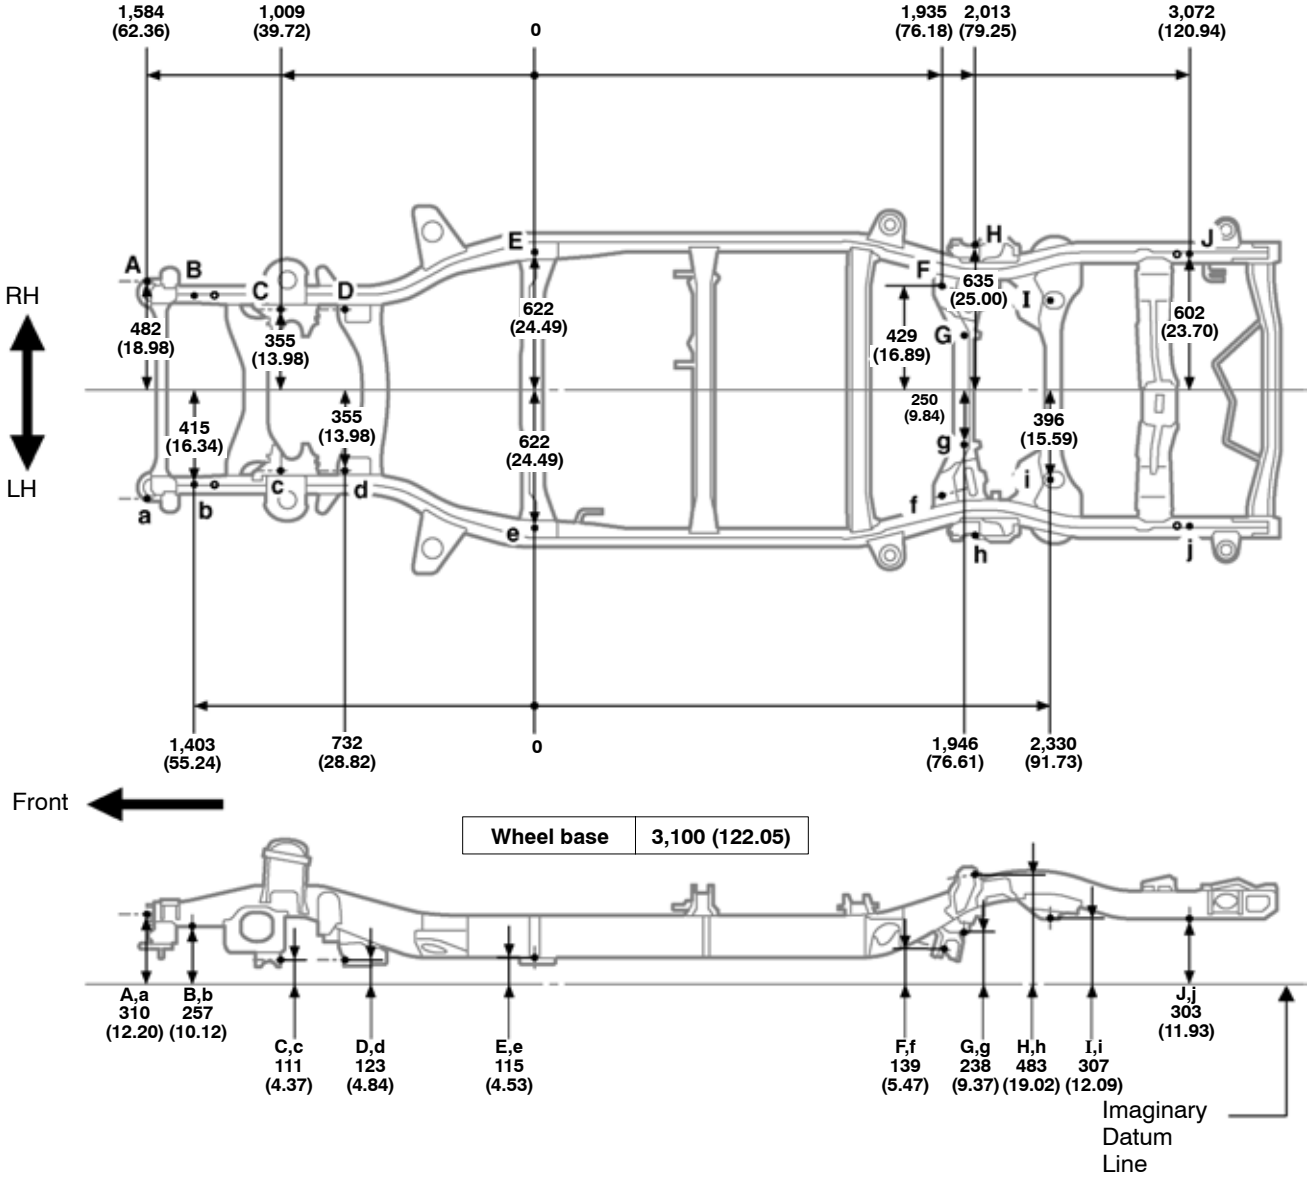


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Front bumper reinforcement installation bolt	M10 (0.39)	F, f	Suspension upper arm installation hole - rear	ø19.5 (0.768)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Rear suspension member installation hole	ø26 (1.02)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	H, h	Rear shock absorber installation hole	ø14.5 (0.571)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	I, i	Rear suspension member installation hole	ø28 (1.10)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	ø18 (0.71)
—	—	—	—	—	—

REAR SUSPENSION MEMBER

(Three - Dimensional Distance)

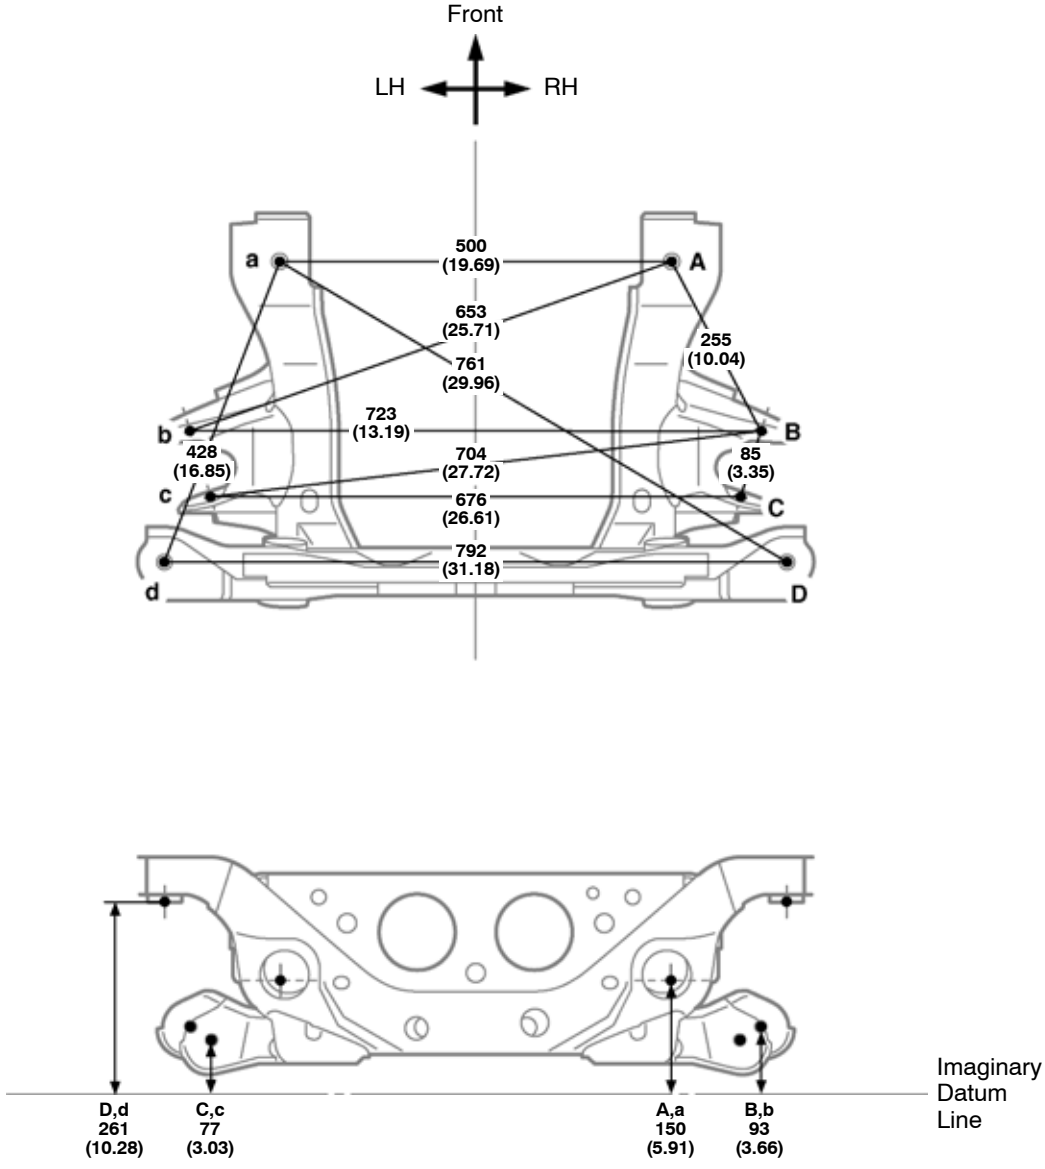


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Rear suspension member installation hole	ø22.5 (0.886)	C, c	Lower arm installation hole	ø16.5 (0.650)
B, b	Lower arm installation hole	ø16.5 (0.650)	D, d	Rear suspension member installation hole	ø43 (1.69)
—	—	—	—	—	—

REAR SUSPENSION MEMBER

(Two - Dimensional Distance)

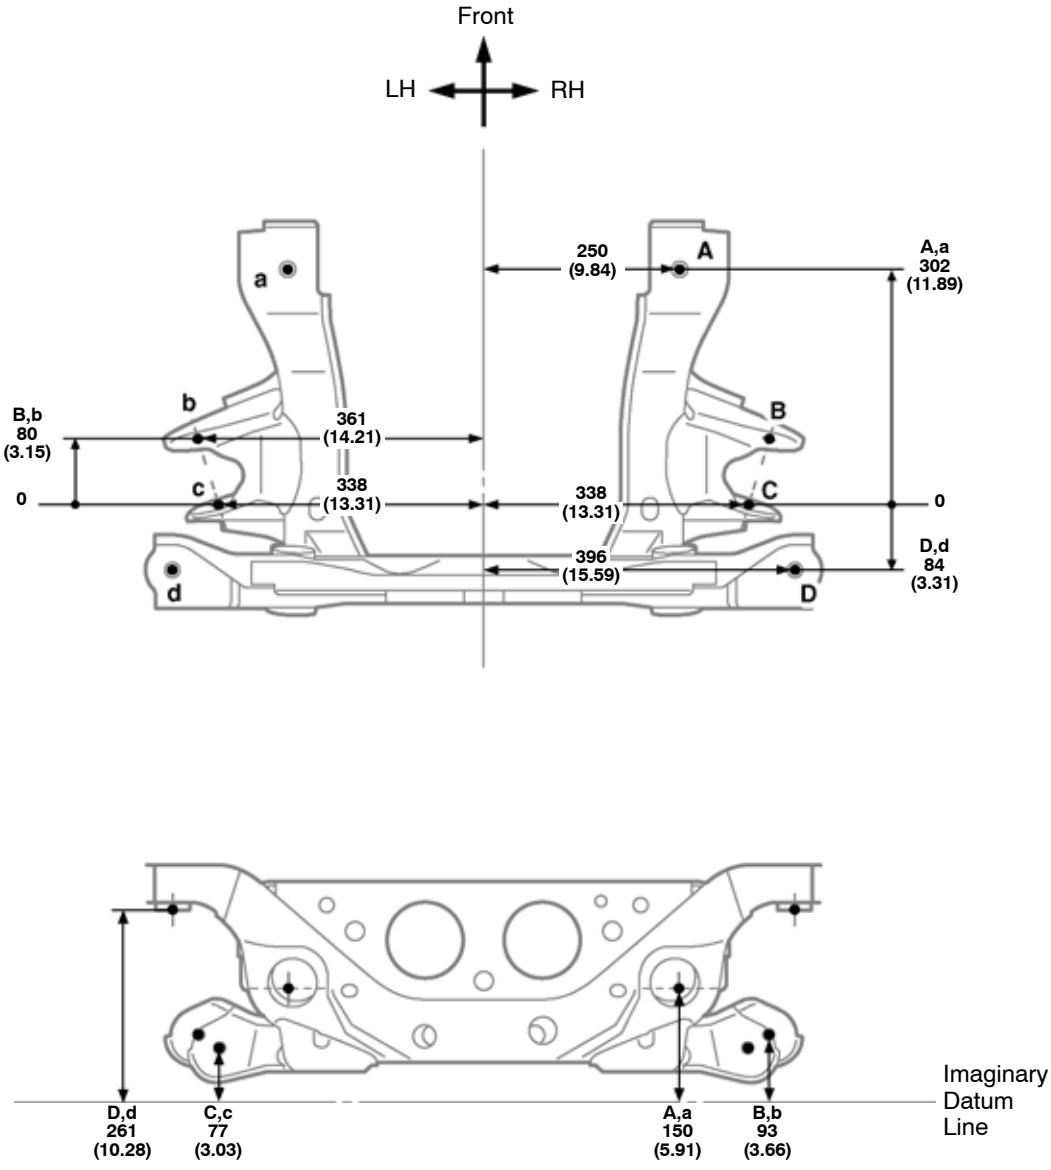

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Rear suspension member installation hole	ø22.5 (0.886)	C, c	Lower arm installation hole	ø16.5 (0.650)
B, b	Lower arm installation hole	ø16.5 (0.650)	D, d	Rear suspension member installation hole	ø43 (1.69)
—	—	—	—	—	—