
■ FRAME

- The thickness and the cross-section height of the side rail have been increased, and the reinforcements are efficiently allocated along the side rail. This ensures high lateral bending rigidity and realizes excellent driving stability.
- Fully closed cross-section structure and large cross-section side rails are used for a highly rigid frame.
- The high torsional rigidity suppresses cabin vibration, providing excellent riding comfort.

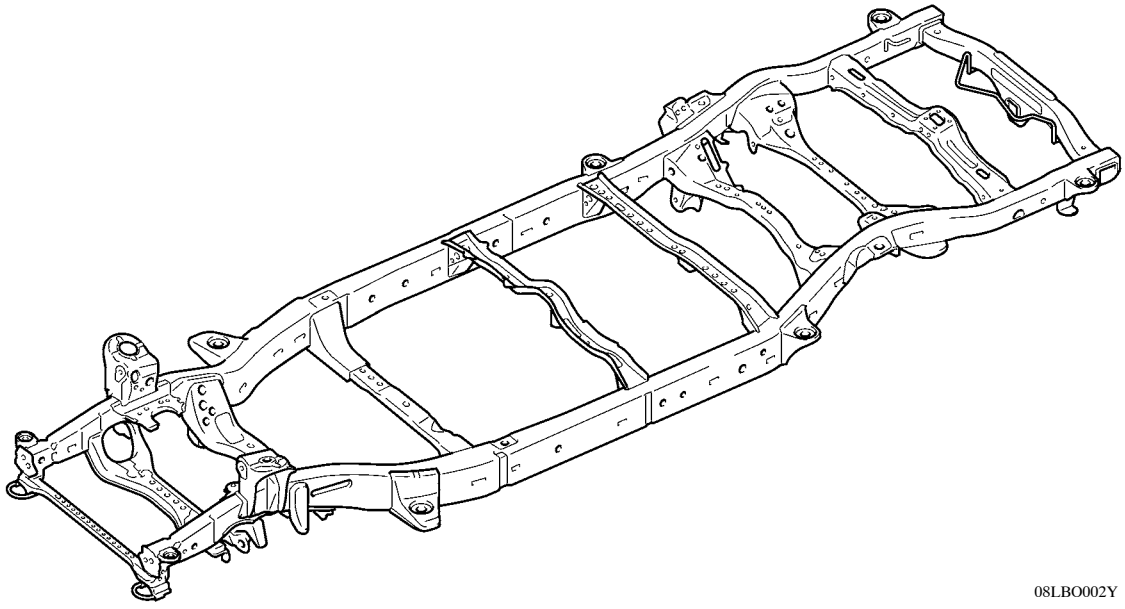

08LBO002Y