
■TOYOTA GENUINE ATF WS

- Toyota genuine ATF WS is used to reduce the resistance of the ATF and improve fuel economy by reducing its viscosity in the practical operating temperature range. At higher-fluid temperatures, the viscosity is the same as that of Toyota genuine ATF Type T-IV, to ensure the durability of the automatic transmission.
- There is no interchangeability between the Toyota genuine ATF WS and other types of ATF (Toyota Genuine ATF Type T-IV, D-II).

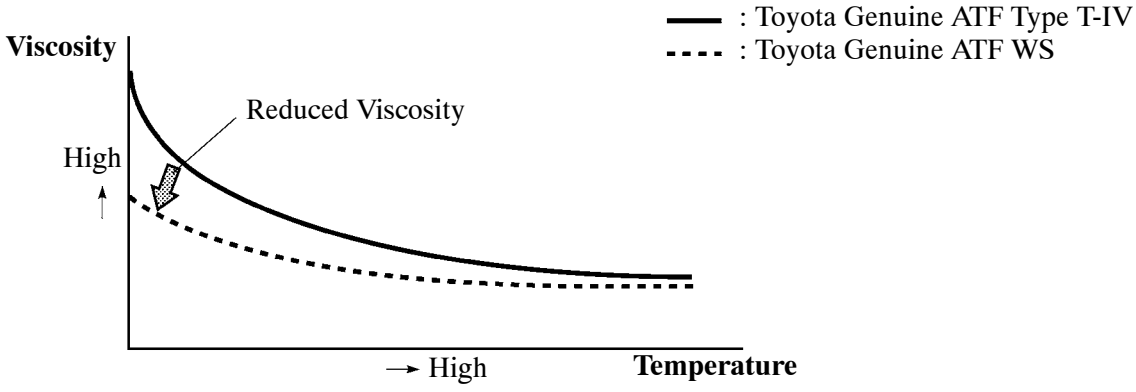

259LSK03