

BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS


1 To protect the body from damage due to gravel, apply the anti-chipping paint to the rocker panels, wheel arches, and lower parts of the doors.
HINT:
- *Work must be performed while wearing the appropriate protective gear and in a well-ventilated area.*
- *Apply anti-chipping paint to the indicated areas first, before applying the top coat.*
- *If anti-chipping paint is unnecessarily applied to an area, apply degreasing agent to a clean cloth and clean the paint off immediately.*

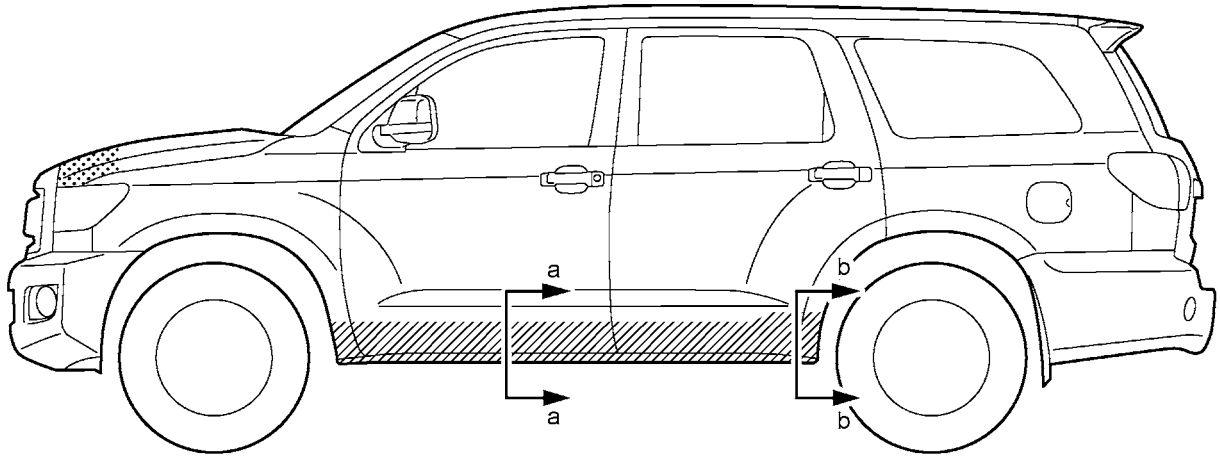


[ALL]

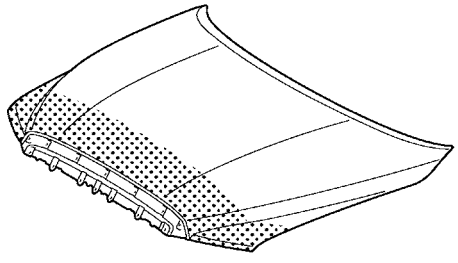

[w/o Side Step]

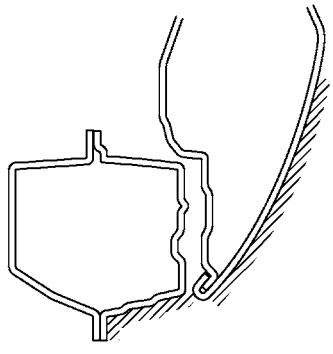

a - a



b - b

▪ ▪ ▪ SOFT–CHIP PRIMER

▪ ▪ ▪ ANTI–CHIPPING PAINT (INTERMEDIATE COAT)

F29878