
2. Rear Wiper

- A raised type wiper is used, allowing the rear wiper to be stored at the tailgate position when not in use and rise to the specified height when in use. This enables the back door window to open and close smoothly when the wiper is not in use.
- A wiper blade with a length of 300 mm (11.8 in.) is provided. The wiping angle has been increased to achieve good rear visibility.
- The wiper arm width has been increased to express the bold design of a full-size SUV.



■TOWING HITCH MAIN MEMBER

A hydroformed cross member is used, which enables the towing hitch main member to reduce weight and achieve high rigidity. As a result, a class-leading towing capacity of 4536 kg (10000 lbs) has been achieved. A new structure is used that enables the hydroformed cross member to penetrate to the backend of the side rail. A reinforcement of optimal thickness is placed optimally at the center of the towing hitch main member.

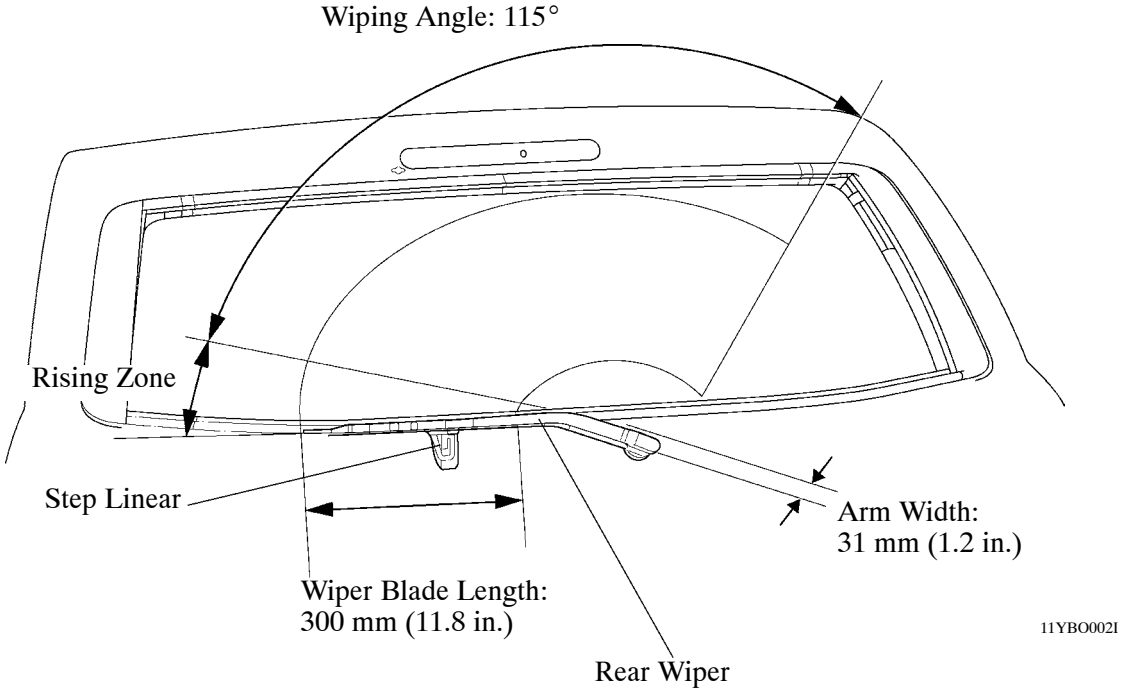