REMOVAL

1. **DISCONNECT BATTERY NEGATIVE TERMINAL**
2. **REMOVE STEERING WHEEL COVER LOWER NO.2 (See page RS-424)**
3. **REMOVE STEERING WHEEL COVER LOWER NO.3 (See page RS-424)**
4. **REMOVE HORN BUTTON ASSEMBLY (See page RS-424)**
5. **REMOVE CRUISE CONTROL MAIN SWITCH**
   (a) Disconnect the connectors.

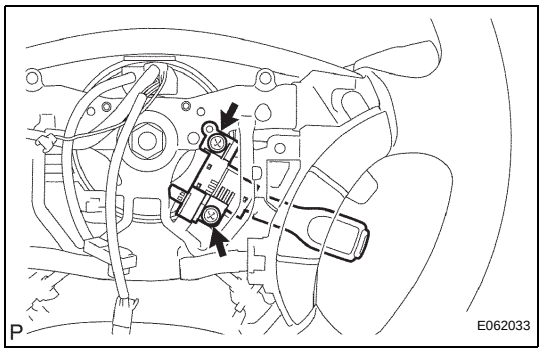

   (b) Remove the 2 screws and cruise control main switch.

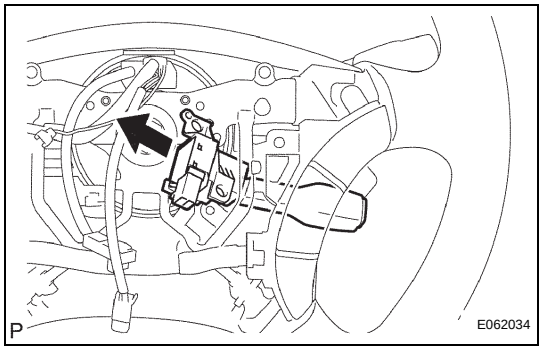

INSTALLATION

1. **INSTALL HORN BUTTON ASSEMBLY (See page RS-424)**
2. **INSTALL STEERING WHEEL COVER LOWER NO.3 (See page RS-425)**
3. **INSTALL STEERING WHEEL COVER LOWER NO.2 (See page RS-425)**
4. **INSPECT SRS WARNING LIGHT (See page RS-425)**