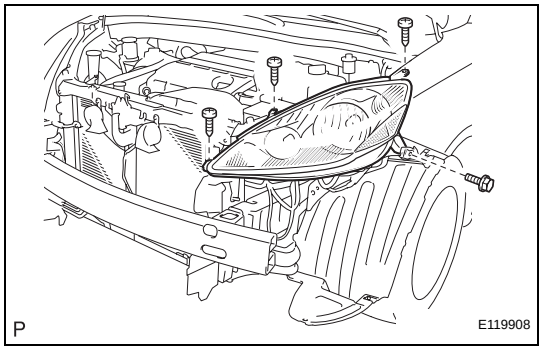


INSTALLATION


1. **INSTALL HEADLIGHT ASSEMBLY**
   (a) Connect the connectors.
   (b) Install the headlight assembly with the bolt and 3 screws.
2. **INSTALL FRONT BUMPER ASSEMBLY (See page ET-9)**
3. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**
4. **VEHICLE PREPARATION FOR HEADLIGHT AIMING**
5. **PREPARATION FOR HEADLIGHT AIMING (Using a tester)**
6. **PREPARATION FOR HEADLIGHT AIMING (Using a screen)**
7. **HEADLIGHT AIMING INSPECTION**
8. **HEADLIGHT AIMING ADJUSTMENT**
9. **VEHICLE PREPARATION FOR FOG LIGHT AIMING**
10. **PREPARATION FOR FOG LIGHT AIMING**
11. **FOG LIGHT AIMING INSPECTION**
12. **FOG LIGHT AIMING ADJUSTMENT**

REPAIR

1. INSTALL HEADLIGHT PROTECTOR RETAINER UPPER

HINT:


- If the installation area of the headlight assembly is damaged, use the supply bracket for low-cost repair.
- Ensure that the headlight assembly is not damaged.

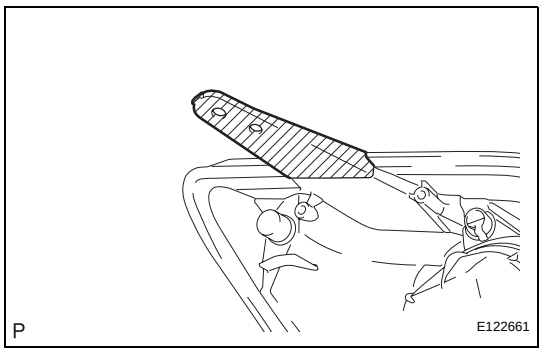

(a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

NOTICE:

After cutting off the part, place the headlight protector retainer upper against the bosses and gradually file away until installation is possible.

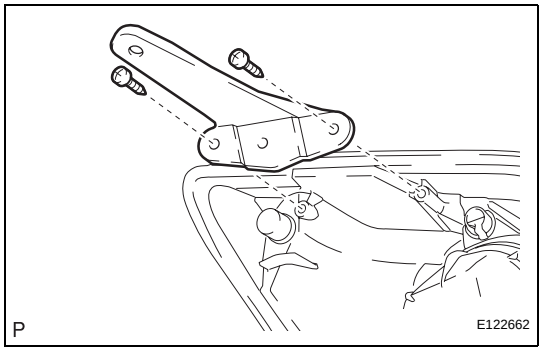


(b) Install the headlight protector retainer upper with the 2 screws.

2. INSTALL LOWER HEADLIGHT BRACKET

HINT:


- If the installation area of the headlight assembly is damaged, use the supply bracket for low-cost repair.
- Ensure that the headlight assembly is not damaged.

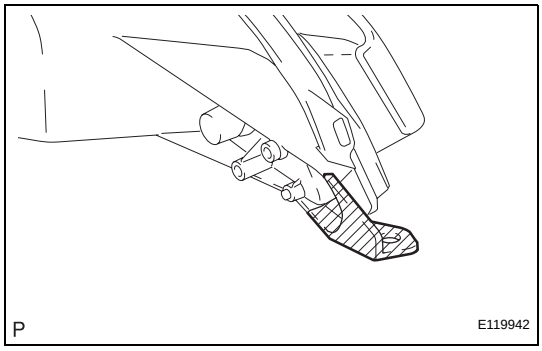

(a) Cut off the part shaded in the illustration and sand smooth with sandpaper.

NOTICE:

After cutting off the part, place the lower headlight bracket against the bosses and gradually file away until installation is possible.

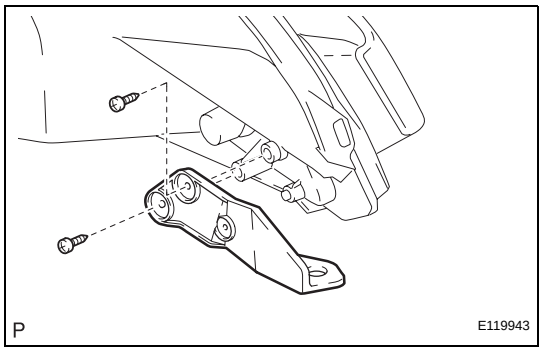


(b) Install the lower headlight bracket with the 2 screws.


3. INSTALL INNER HEADLIGHT MOUNTING BRACKET

HINT:

- If the installation area of the headlight assembly is damaged, use the supply bracket for low-cost repair.
- Ensure that the headlight assembly is not damaged.

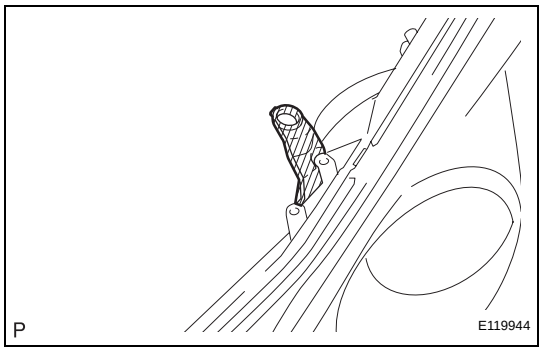

(a) Cut off the part shaded in the illustration and sand smooth with sandpaper.
NOTICE:
After cutting off the part, place the inner headlight mounting bracket against the bosses and gradually file away until installation is possible.

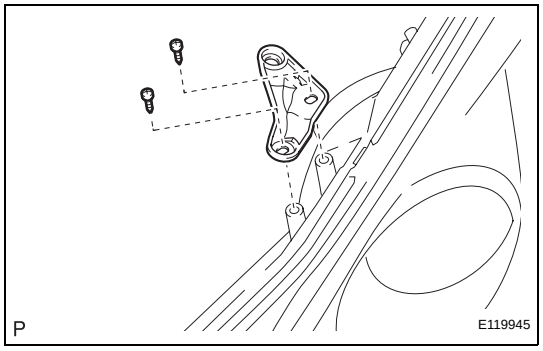

(b) Install the inner headlight mounting bracket with the 2 screws.