
REASSEMBLY


1. INSTALL REAR COMBINATION LIGHT BULB

(a) Install the 2 rear combination light bulbs to the rear combination light socket and wire sub-assembly.

(b) Turn in the direction indicated by the arrow and install the 2 rear combination light bulbs to the rear combination light assembly.

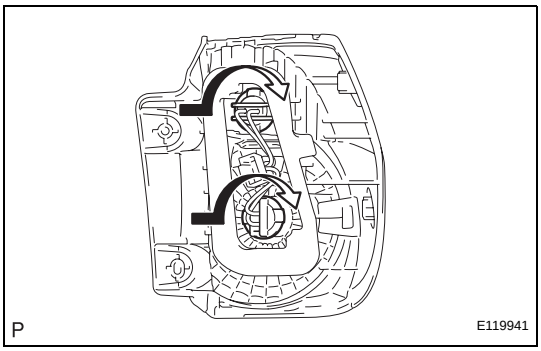

INSTALLATION

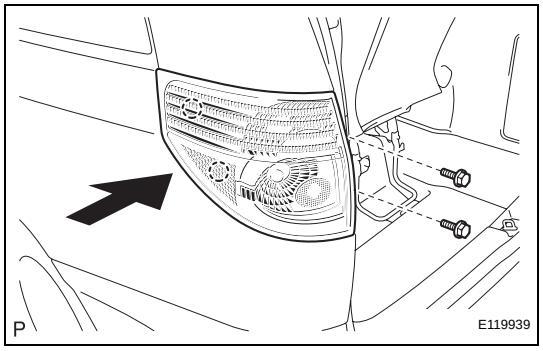

1. INSTALL REAR COMBINATION LIGHT ASSEMBLY

(a) Connect the connector.

(b) Install the rear combination light assembly with the 2 bolts and 2 pins as shown in the illustration.
Torque: 5.4 N*m (55 kgf*cm, 48 in.*lbf)

2. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL