TRANSMITTER BATTERY

REPLACEMENT

1. REMOVE TRANSMITTER BATTERY

NOTICE:

Special caution should be taken for handling each component as they are precision electronic components.

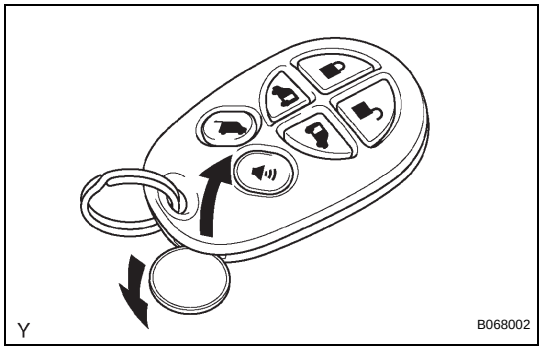

(a) Using a coin or the equivalent, pry out the transmitter case.

NOTICE:

Do not forcibly pry out the case.

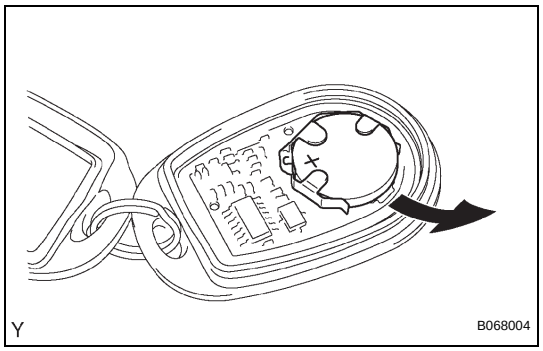

(b) Remove the battery (lithium battery).

NOTICE:

- **Do not push the terminals with your finger.**
- **Prying up the battery (lithium battery) to forcibly remove it will cause deformation of the terminals.**
- **Do not touch the battery with wet hands. Water may cause unexpected rust.**
- **Do not touch or move any components inside the transmitter, or it may interfere with the proper operation.**

2. INSTALL TRANSMITTER BATTERY

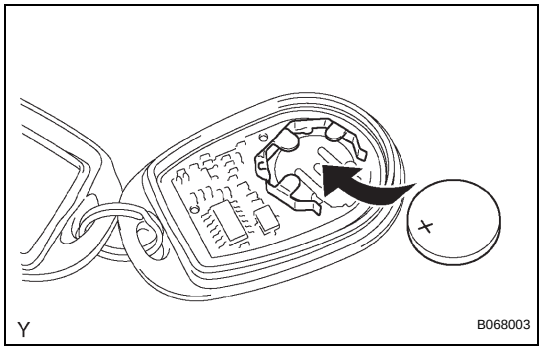

(a) Install a new battery (lithium battery) with the positive (+) side up, as shown in the illustration.

NOTICE:

- **Be sure that the positive side and the negative side of the transmitter battery are faced correctly.**
- **Be careful not to bend the electrode of the transmitter battery insertion.**
- **Be careful that no dust or oil adheres to the transmitter case.**

(b) Install the case securely.

DL