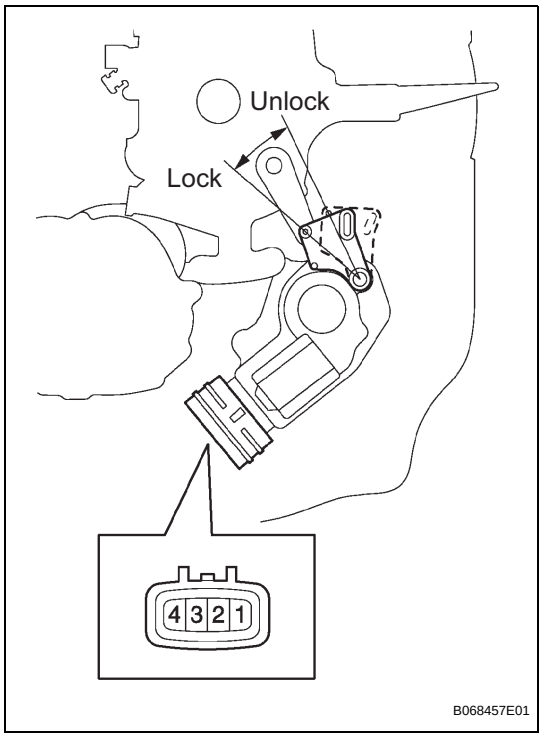


REAR DOOR LOCK

INSPECTION

1. INSPECT REAR DOOR LOCK ACTUATOR ASSEMBLY LH

(a) Apply battery voltage to the door lock and check operation of the motor.
OK


Measurement Condition	Specified Condition
Battery positive (+) → Terminal 2 Battery negative (-) → Terminal 3	Lock
Battery positive (+) → Terminal 3 Battery negative (-) → Terminal 2	Unlock

HINT:
If the result is not as specified, replace the door lock assembly.

(b) Measure the resistance according to the value(s) in the table below.
Standard resistance

Tester Connection	Door Lock Position	Specified Condition
1 - 4	Lock	10 kΩ or higher
1 - 4	Unlock	Below 1 Ω

HINT:
If the result is not as specified, replace the door lock assembly.

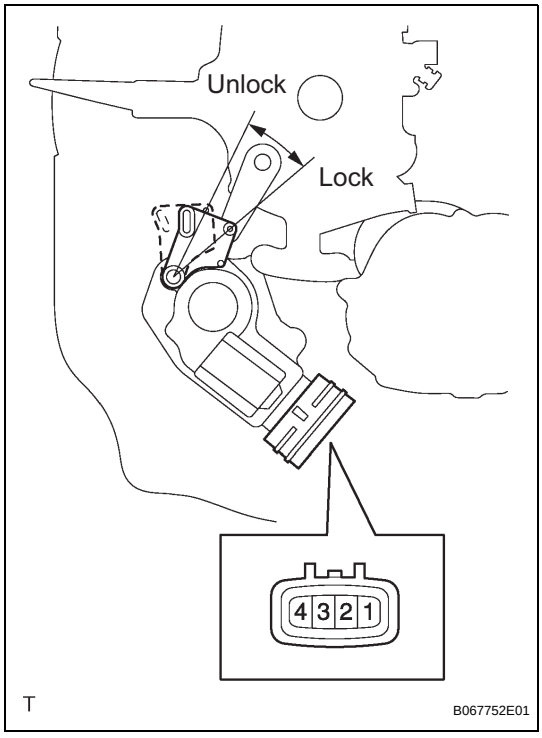

2. INSPECT REAR DOOR LOCK ACTUATOR ASSEMBLY RH

(a) Apply battery voltage to the door lock and check operation of the motor.
OK

Measurement Condition	Specified Condition
Battery positive (+) → Terminal 2 Battery negative (-) → Terminal 3	Lock
Battery positive (+) → Terminal 3 Battery negative (-) → Terminal 2	Unlock

HINT:
If the result is not as specified, replace the door lock assembly.

(b) Measure the resistance according to the value(s) in the table below.
Standard resistance

Tester Connection	Door Lock Position	Specified Condition
1 - 4	Lock	10 kΩ or higher
1 - 4	Unlock	Below 1 Ω

HINT:
If the result is not as specified, replace the door lock assembly.

DL