

TELEVISION DISPLAY

COMPONENTS

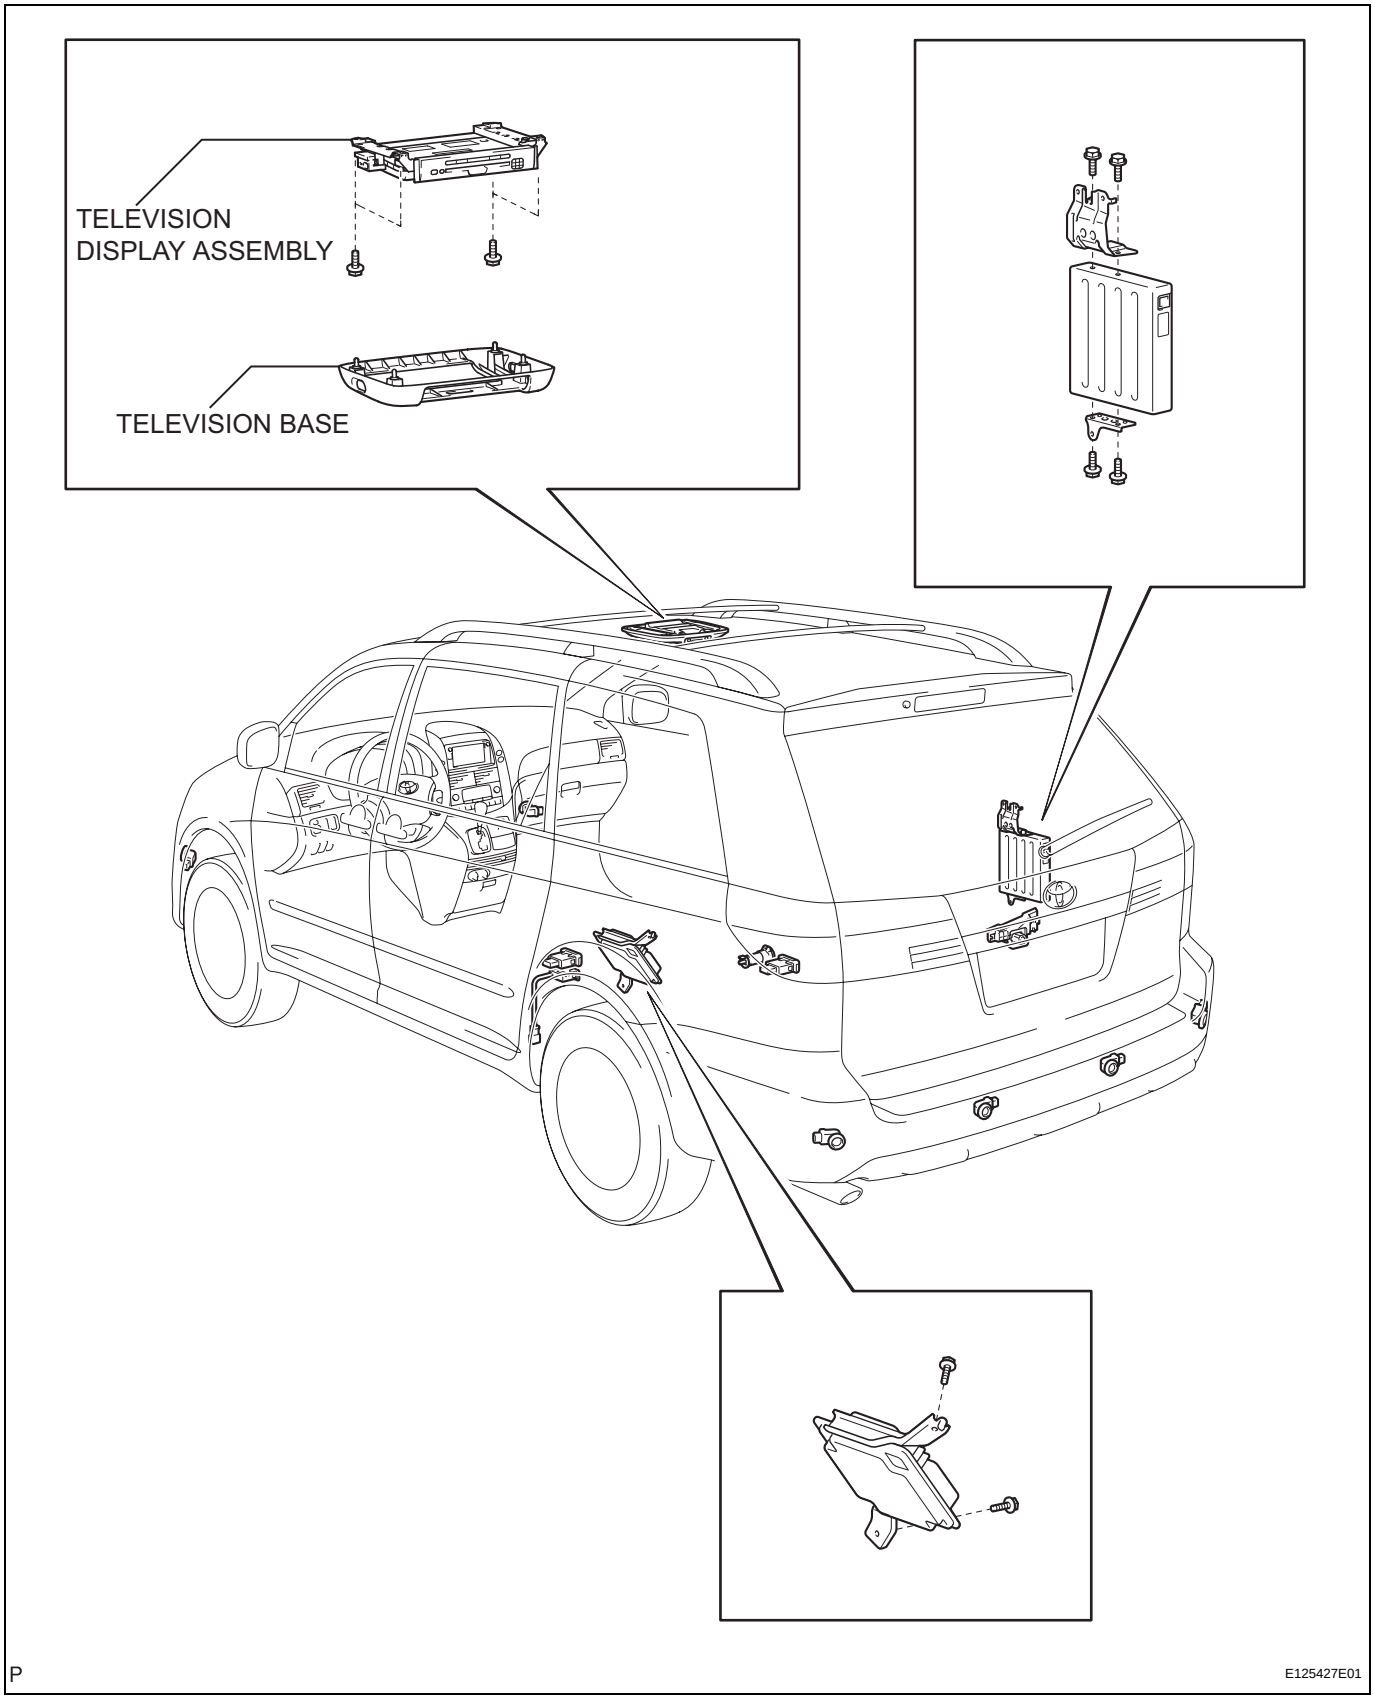


AV

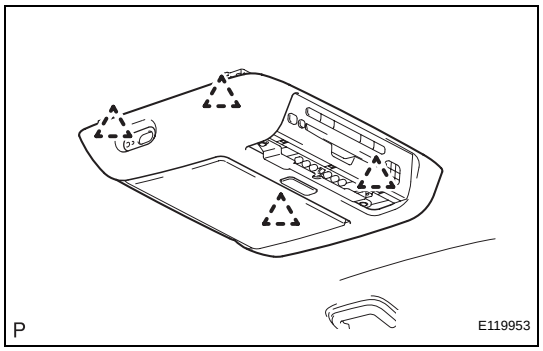

REMOVAL

1. REMOVE TELEVISION BASE


(a) Release the 4 clips and remove the television base.

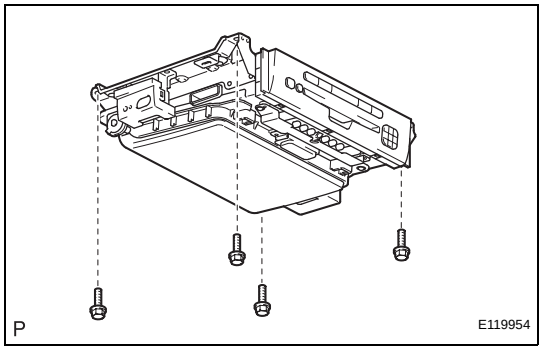

2. REMOVE TELEVISION DISPLAY ASSEMBLY

(a) Disconnect the connector and remove the 4 bolts and the television display assembly.


INSTALLATION

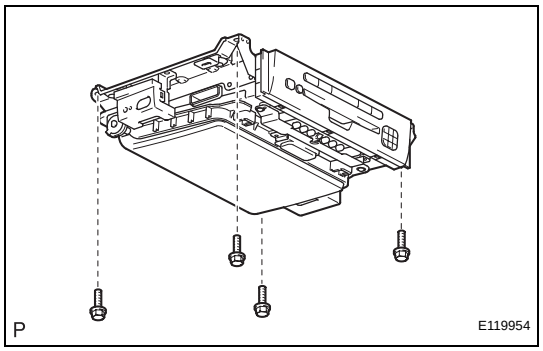

1. INSTALL TELEVISION DISPLAY ASSEMBLY

(a) Install the television display assembly with the 4 bolts.

(b) Connect the connector.

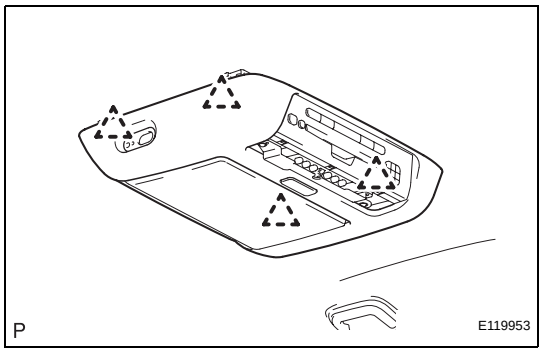

2. INSTALL TELEVISION BASE

(a) Engage the 4 clips to install the television base.