

REMOVAL

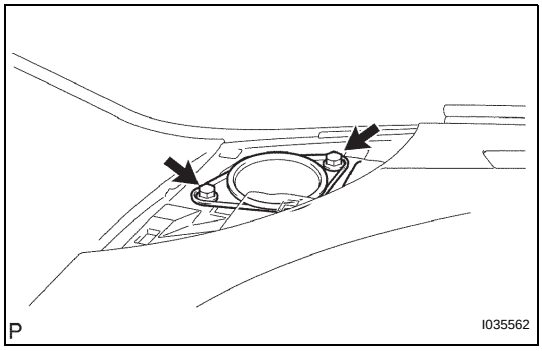

1. **REMOVE INSTRUMENT PANEL SPEAKER PANEL SUB-ASSEMBLY (See page IP-10)**

2. **REMOVE FRONT NO. 2 SPEAKER ASSEMBLY**
   (a) Disconnect the connector and remove the 2 screws and the front No. 2 speaker assembly.

INSTALLATION

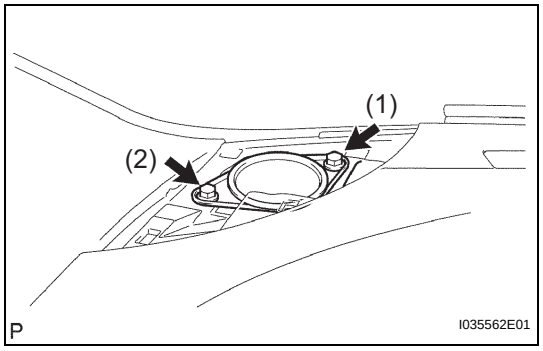

1. INSTALL FRONT NO. 2 SPEAKER ASSEMBLY

(a) Connect the connector.

(b) Install the front No. 2 speaker assembly with the 2 screws.

NOTICE:
Tighten the screws in order shown in the illustration to install the front No. 2 speaker assembly.

2. INSTALL INSTRUMENT PANEL SPEAKER PANEL SUB-ASSEMBLY