

REMOVAL

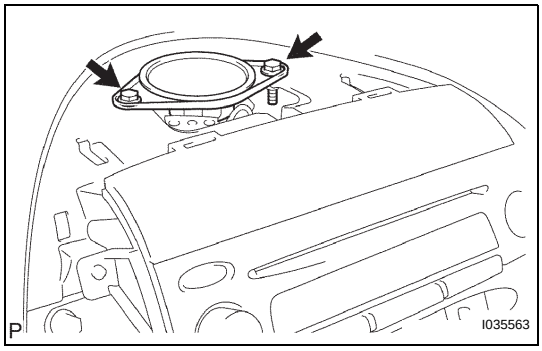

1. **REMOVE INSTRUMENT CLUSTER FINISH PANEL GARNISH (See page IP-10)**
2. **REMOVE STEREO COMPONENT SPEAKER ASSEMBLY**
   (a) Remove the 2 screws.
   (b) Disconnect the connector and remove the stereo component speaker assembly.

INSTALLATION

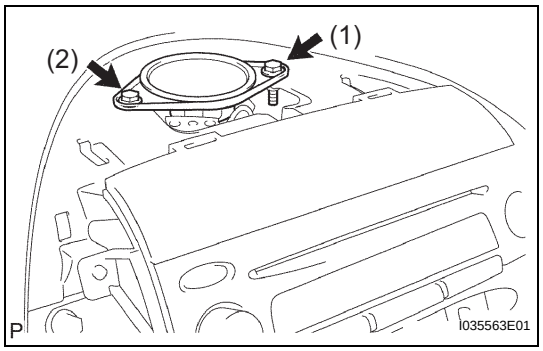

1. INSTALL STEREO COMPONENT SPEAKER ASSEMBLY

(a) Connect the connector.

(b) Install the stereo component speaker assembly with the 2 screws.

NOTICE:
Tighten the screws in order shown in the illustration to install the stereo component speaker assembly.

2. INSTALL INSTRUMENT CLUSTER FINISH PANEL GARNISH