INSTALLATION


1. INSTALL REAR NO. 2 SEAT ASSEMBLY LH

(a) Place the rear No. 2 seat assembly LH in the cabin.
NOTICE:
Be careful not to damage the body.

(b) Install the rear No. 2 seat assembly LH with the 2 bolts.
Torque: 29 N*m (296 kgf*cm, 21 ft.*lbf)

(c) Install the locus cable with the bolt.
Torque: 29 N*m (296 kgf*cm, 21 ft.*lbf)

(d) Install the 2 headrests.
HINT:
Check that the seat leg locks.

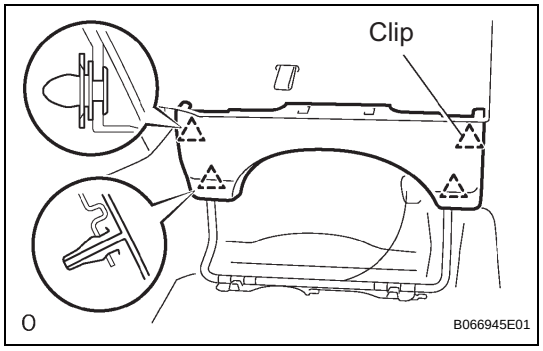

2. INSTALL REAR SEAT LEG SIDE GARNISH SUB-ASSEMBLY LH

(a) Engage the clips to install the rear seat leg side garnish sub-assembly.