

ROOF DRIP SIDE FINISH MOULDING

COMPONENTS

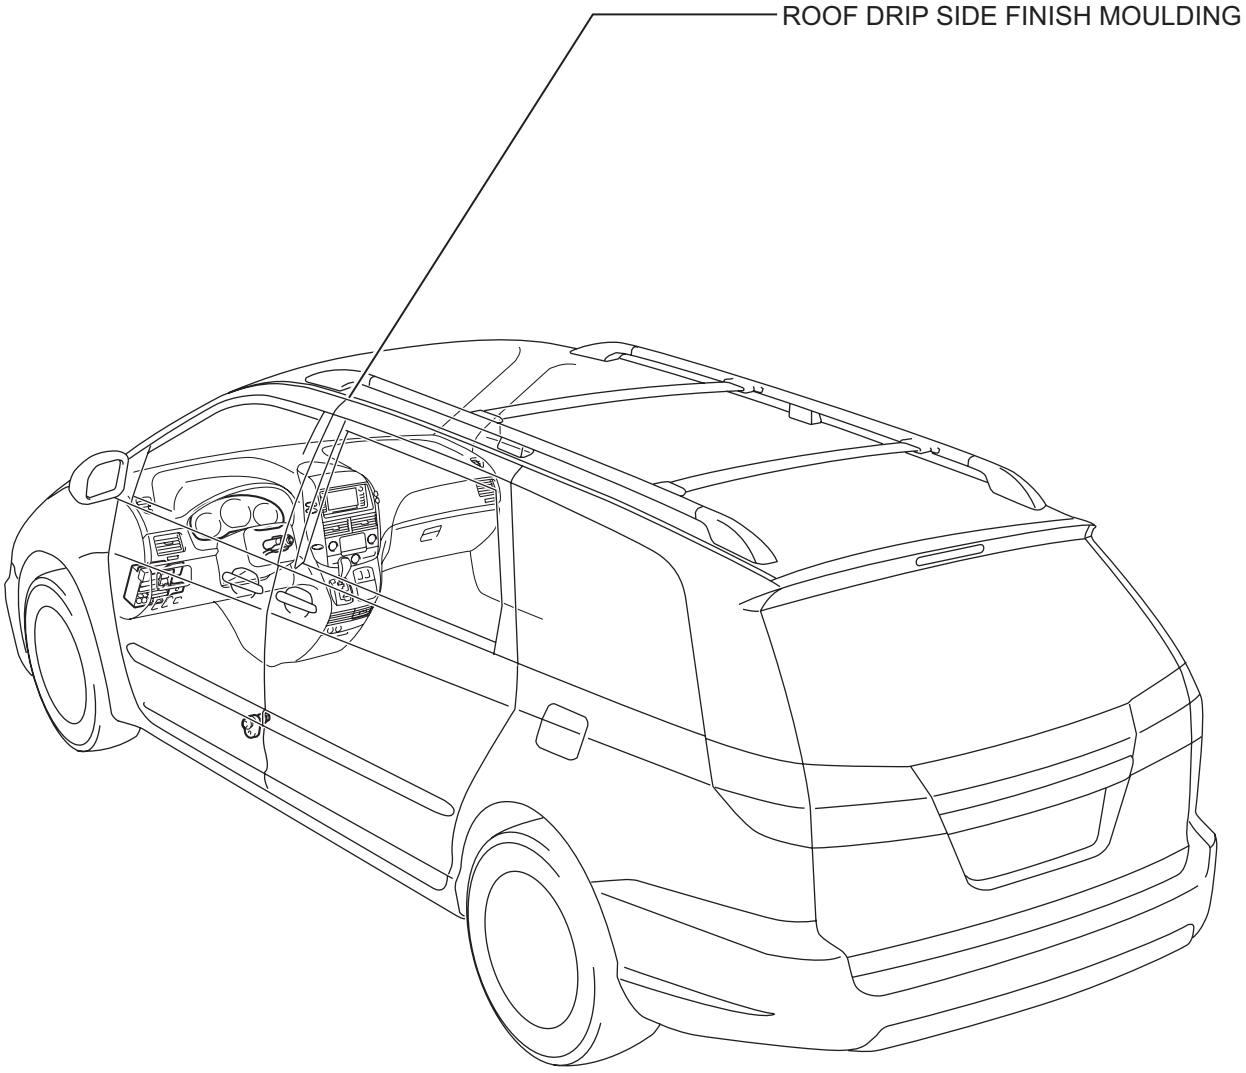

Y

B120040E03

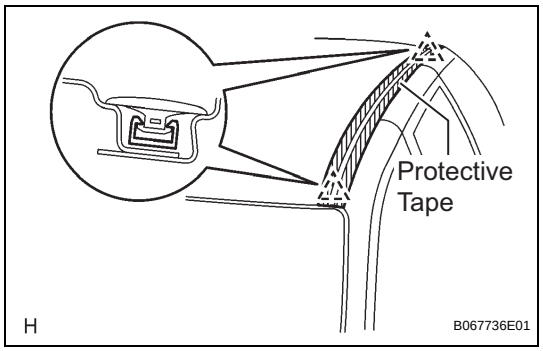

REMOVAL

1. REMOVE ROOF DRIP SIDE FINISH MOULDING

(a) Put protective tape around the roof drip side finish moulding.

(b) Using a remover for the roof moulding, disengage of the clips both in the front and rear ends of the roof drip side finish moulding and then remove the roof drip side finish moulding.

NOTICE:

- **Do not remove the clips.**
- **If the clips are damaged or removed accidentally, exchange them for supply ones.**