

OUTSIDE MOULDING

COMPONENTS

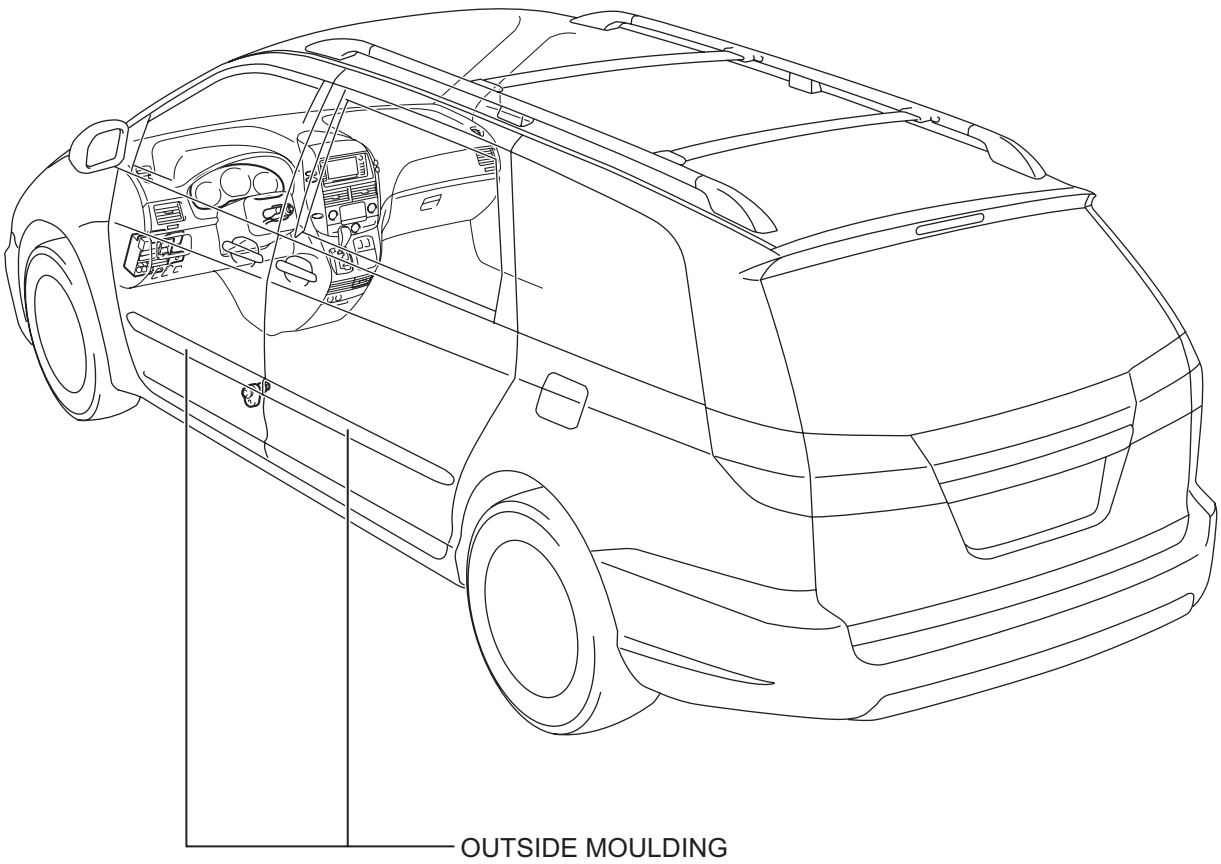

Y

B120040E02

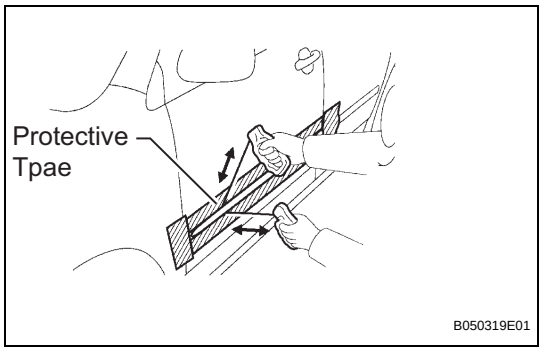

REMOVAL

1. REMOVE OUTSIDE MOULDING

(a) Put protective tape around the outside moulding.

(b) Using a heat light, heat the moulding between 40 to 60 °C (104 to 140 °F).

NOTICE:

Do not heat the moulding excessively.

(c) Tie both piano wire ends to a wooden block or a similar object.

(d) Cut off the tape by pulling the piano wire and remove the outside moulding with reference pins remaining on the moulding.

NOTICE:

- **If reusing the outside moulding, take care not to damage the outside moulding.**
- **Do not damage the body.**
- **Be careful of the reference pins on the outside moulding when removing the outside moulding.**