

FRONT DOOR WINDOW FRAME MOULDING

COMPONENTS

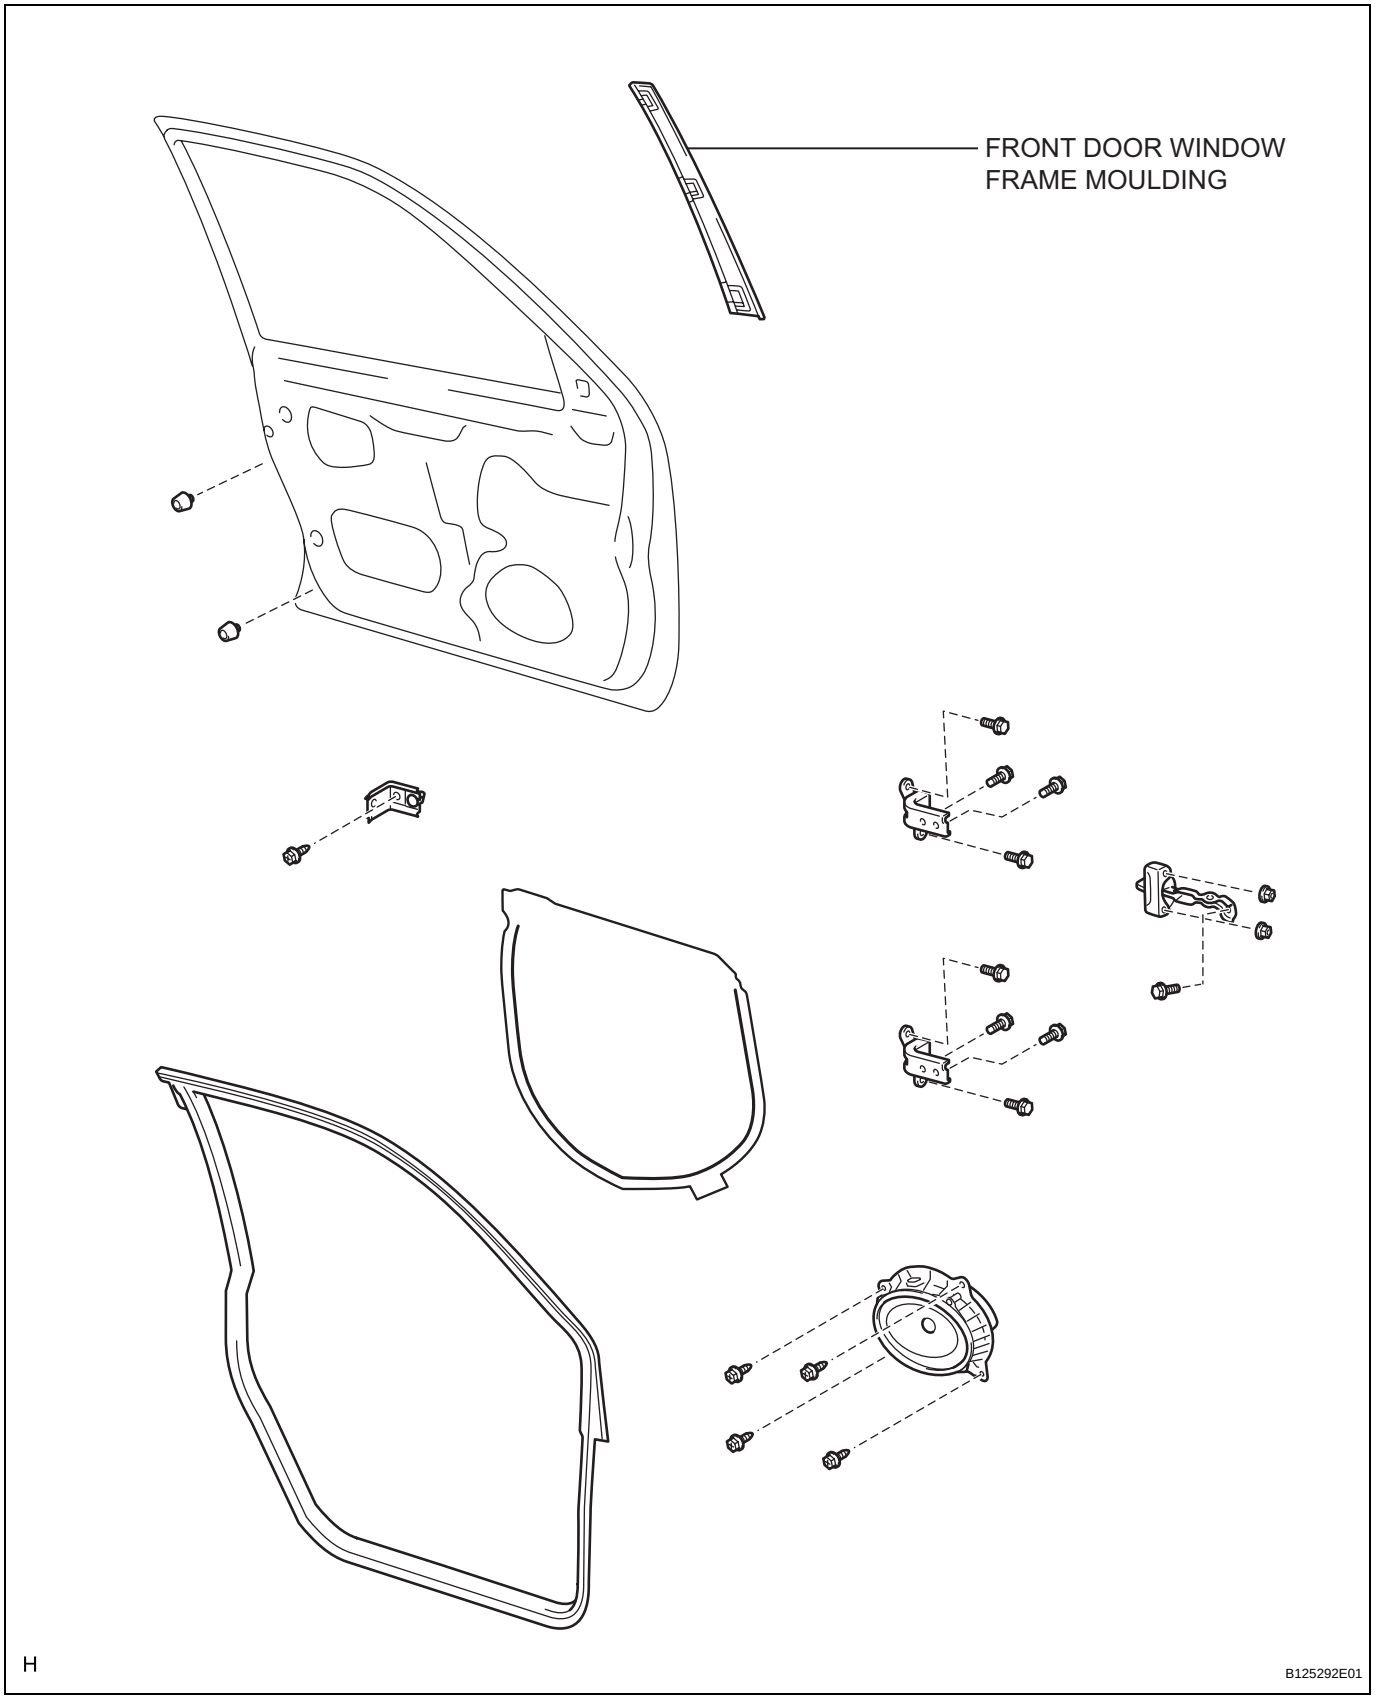

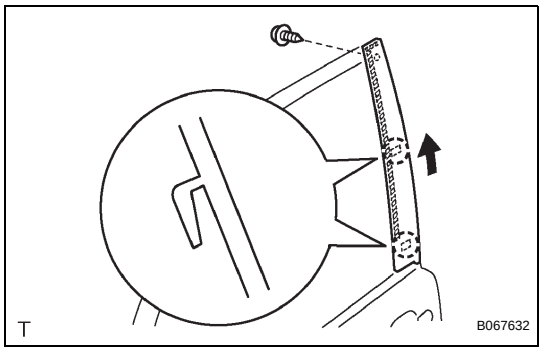

REMOVAL

1. REMOVE FRONT DOOR WINDOW FRAME MOULDING

(a) Remove the screw.

(b) Using a heat light, heat the front door window frame moulding between 40 to 60 °C (104 to 140 °F).

NOTICE:

Do not heat the front door window frame moulding excessively.

(c) Slide the front door window frame moulding upward to remove the moulding.

NOTICE:

If reusing the moulding, take care not to damage the front door window frame moulding.