


RADIATOR SUPPORT (ASSY)


F14955-A

REPLACEMENT

REMOVAL

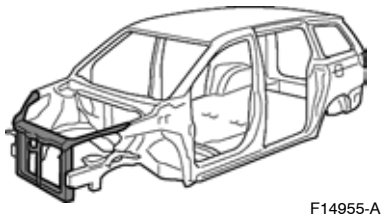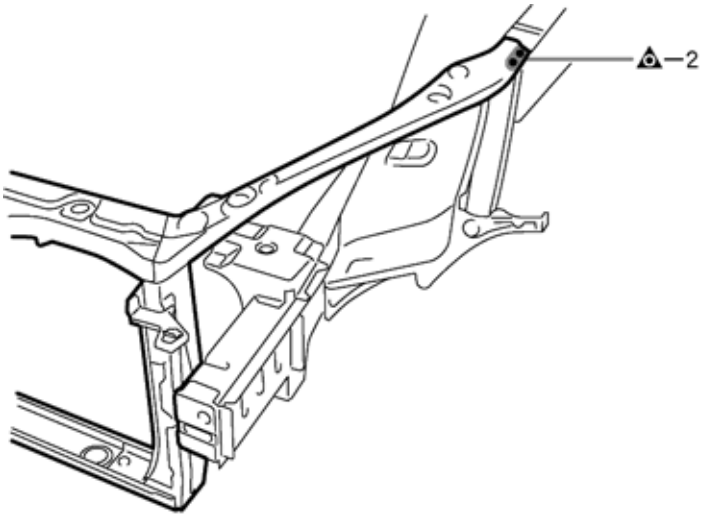


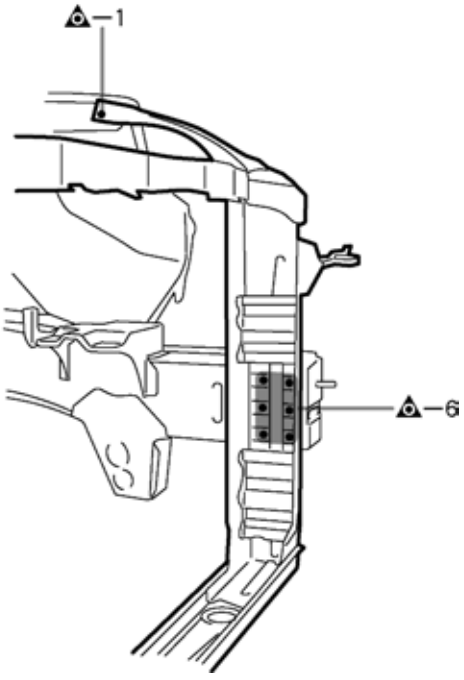

F14955

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

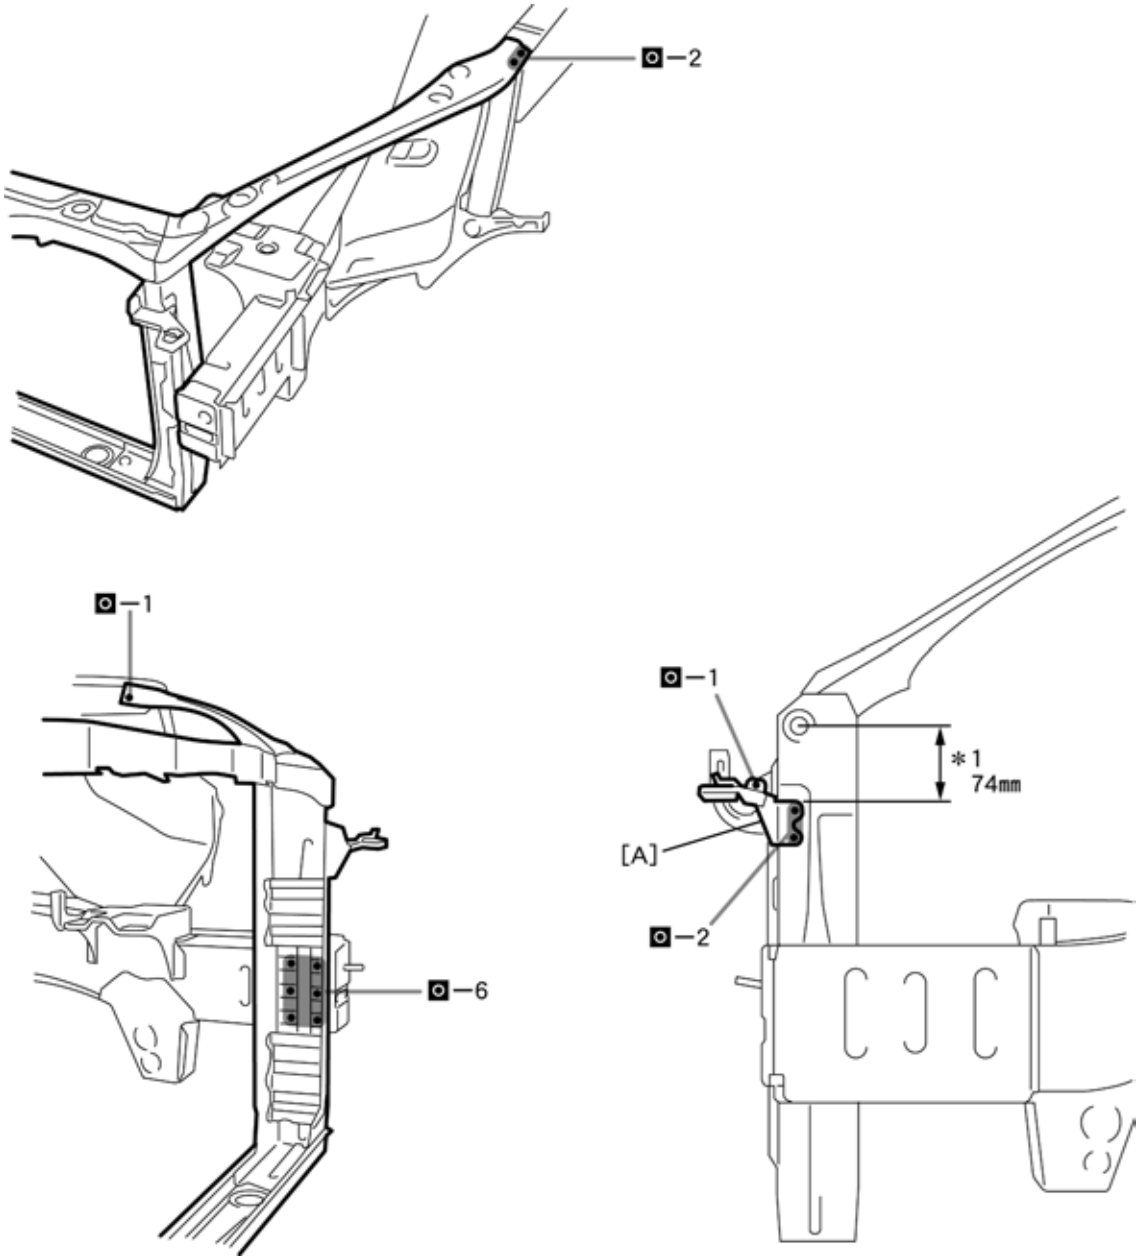


F14956


POINT

1 *1: The value is reference value.

PART NAME

[A] Headlight Bracket (RH), Headlight Mounting Upper Bracket (LH)
74mm (2.91in.)

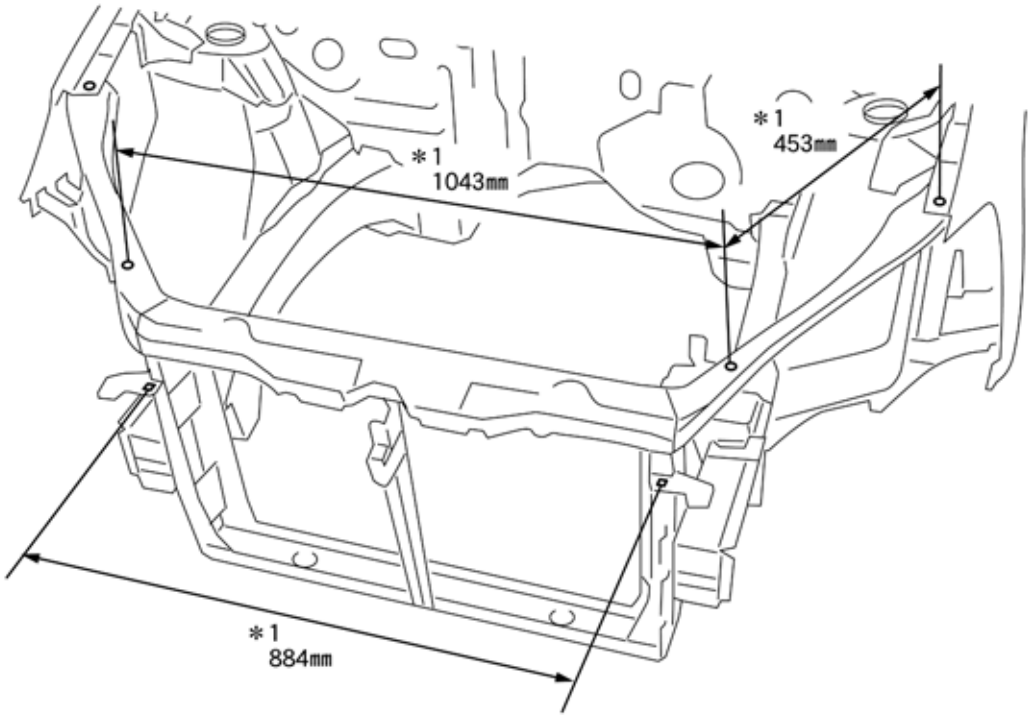

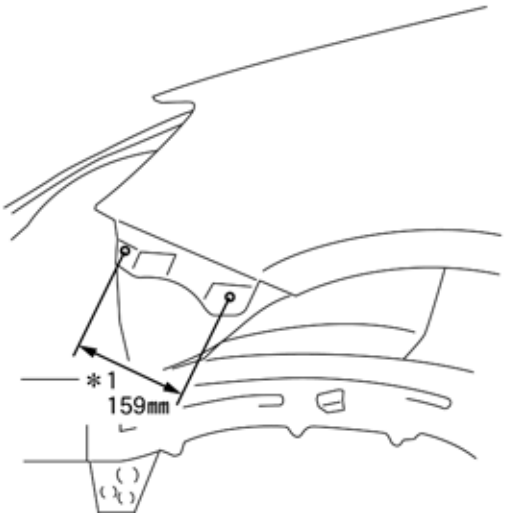

F14957

POINT

1 *1: The value is reference value.
2 Measure the dimensions before installing headlights.

159mm (6.26in.) 453mm (17.83in.) 884mm (34.80in.) 1043mm (41.06in.)