

FRONT SIDE MEMBER (ASSY)


F14965-A

REPLACEMENT
With the radiator support and front fender apron removed.

REMOVAL

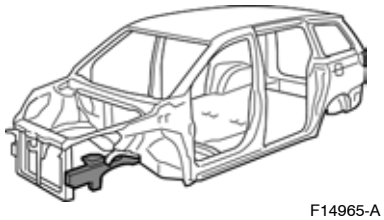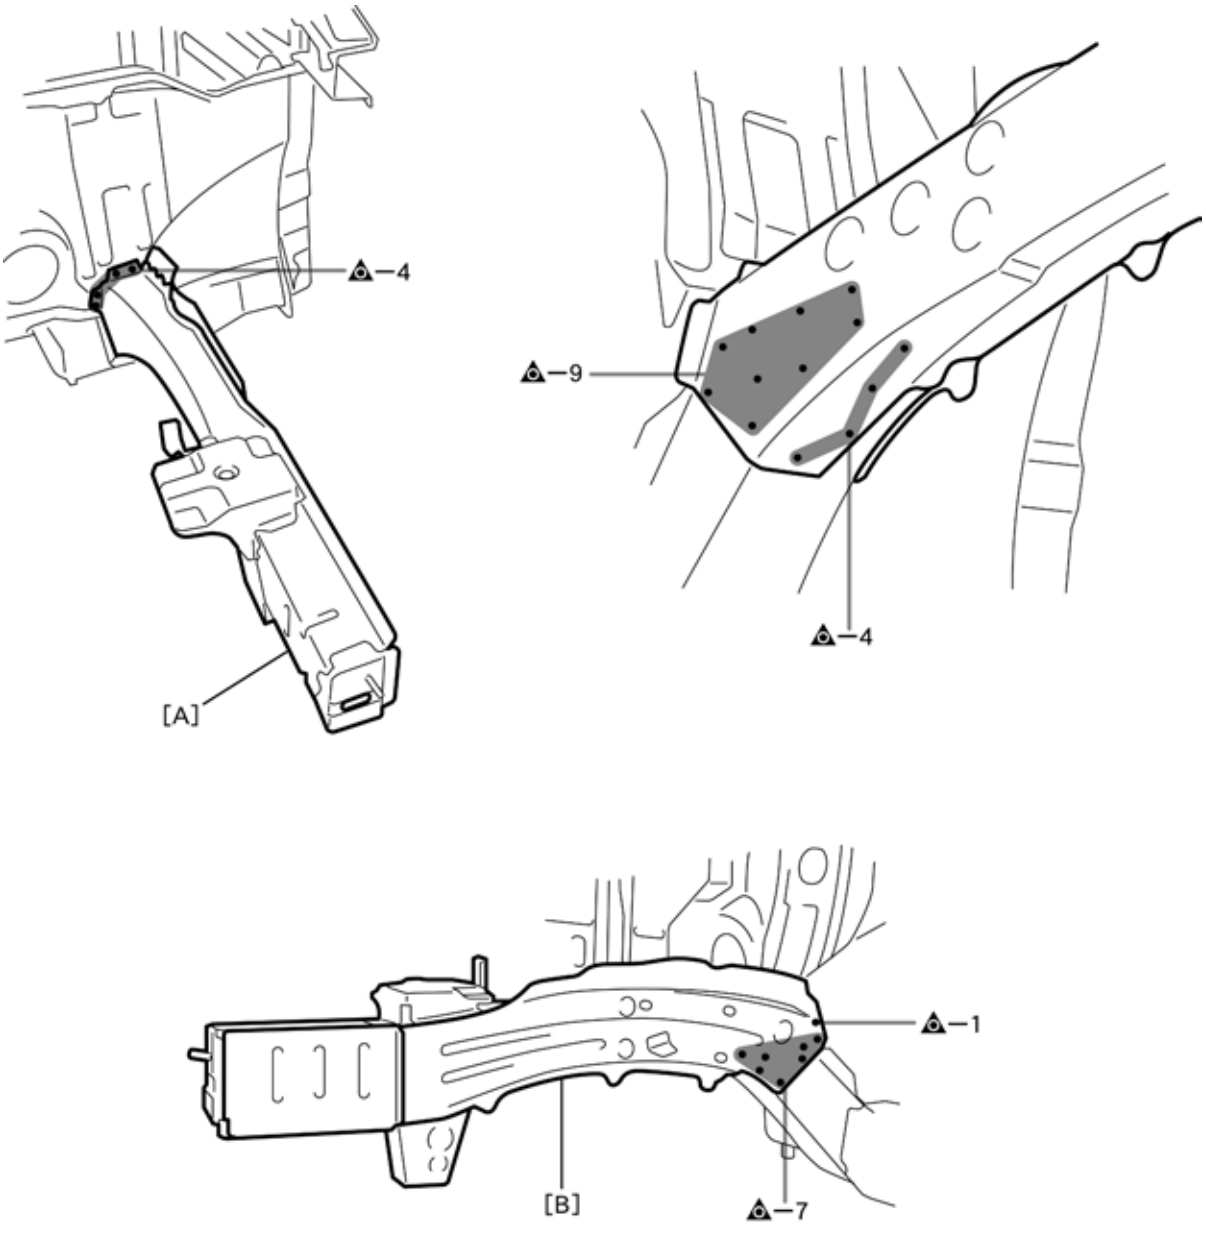


F14965

PART NAME
[A] Front Side Inner Member [B] Front Side Member Outer Plate

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

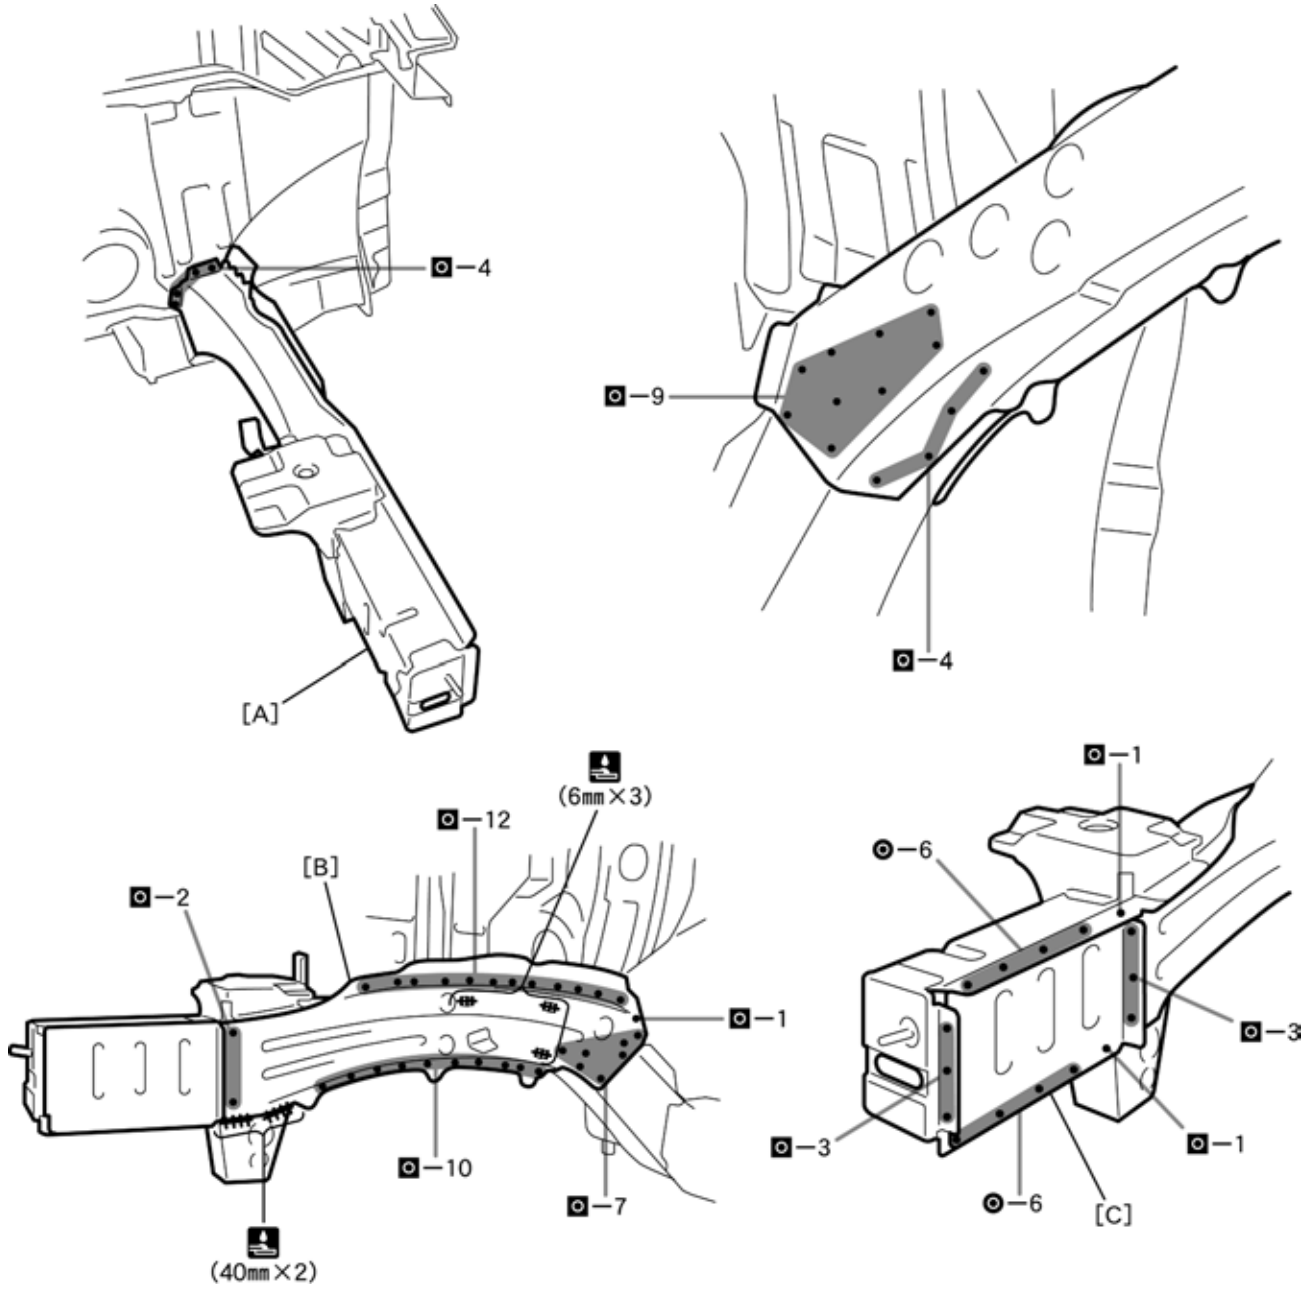

F14966

POINT

1 Make sure each measurement is correct, as this parts affects the front wheel alignment.

PART NAME

[A] Front Side Inner Member [B] Front Side Member Outer Plate
[C] Front Side Member Extension

6mm (0.24in.) 40mm (1.57in.)