
BODY LOWER BACK PANEL REINFORCEMENT (ASSY)


F15013-A

REPLACEMENT
With the back door opening lower gusset removed.

REMOVAL

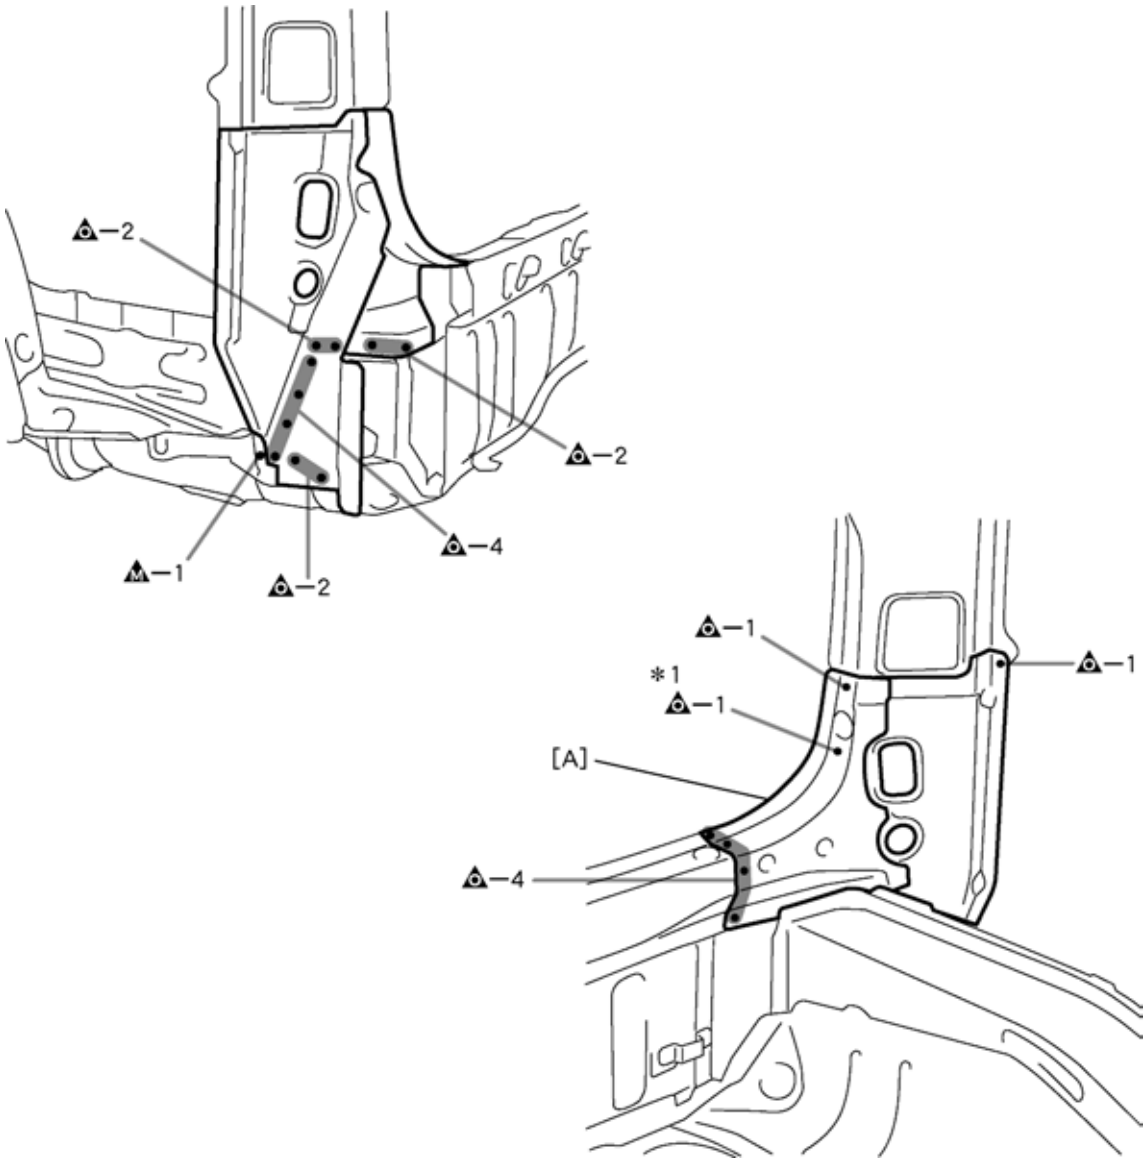


F15013

POINT
1 Remove the [A] at the same time.
2 *1: RH Only

PART NAME
[A] Lower Back Side Panel

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

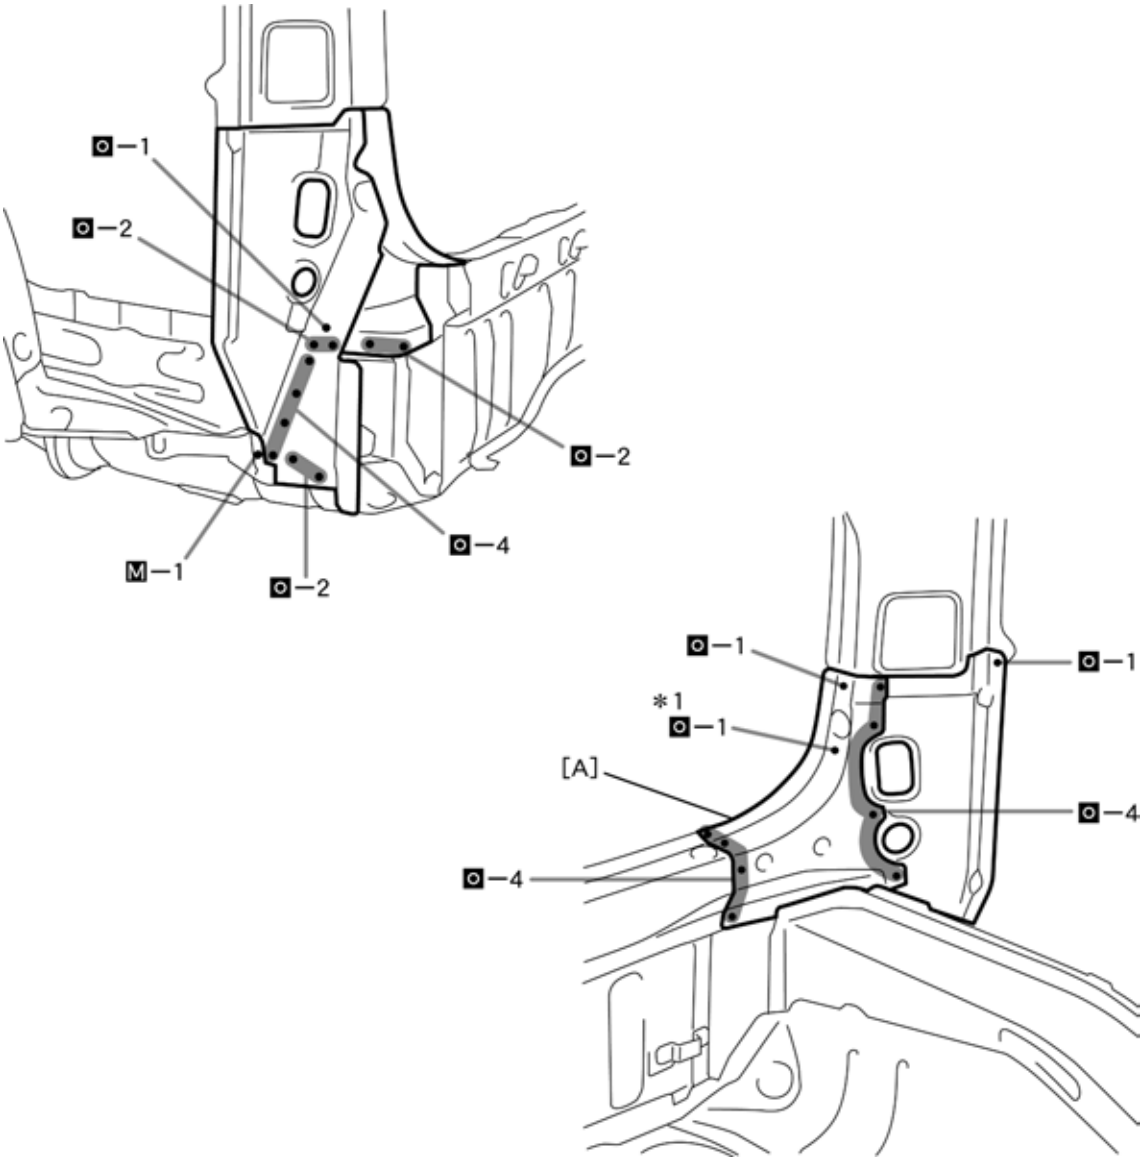

F15014

POINT

1 *1: RH Only

PART NAME

[A] Lower Back Side Panel