
BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT

(Three-Dimensional Distance)

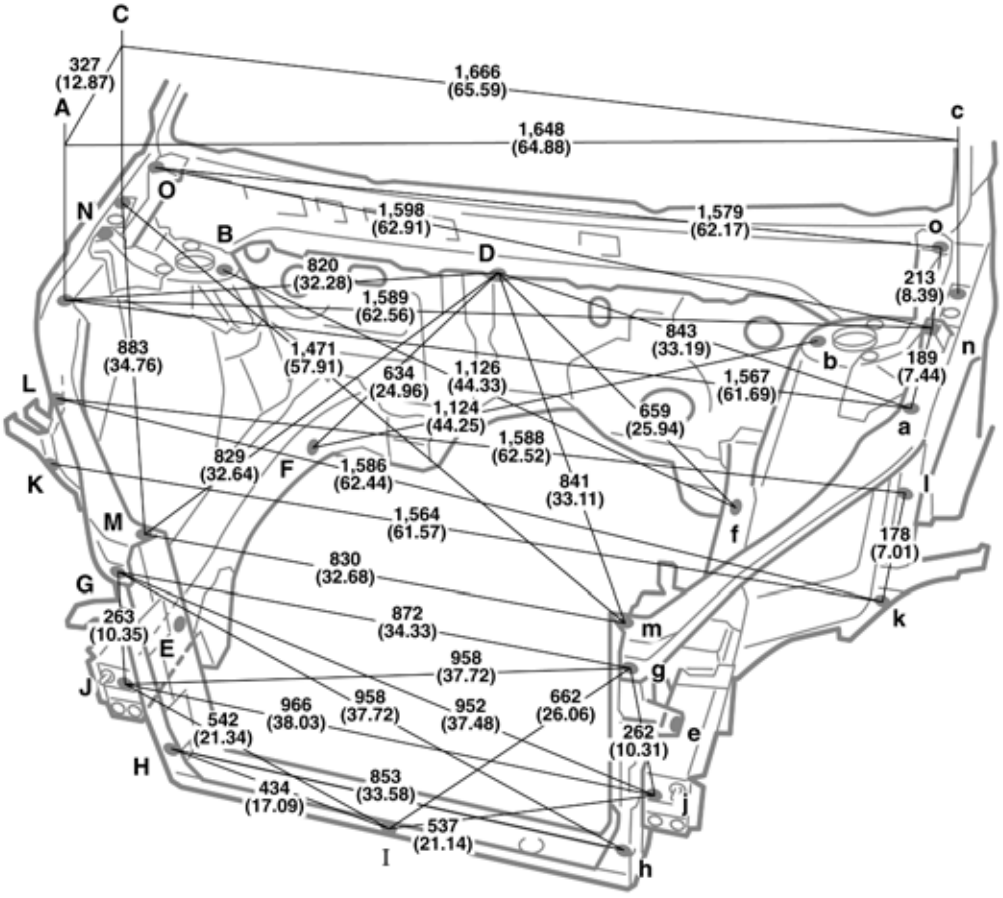

Height from Imaginary Standard Line

A,a	C,c	M,m
836 (32.91)	881 (34.69)	661 (26.02)

Vehicle Dimensions


B-b	B-c or b-C	B-C or b-c	D-E	D-e	N-n
1,194 (47.01)	1,435 (56.50)	263 (10.35)	899 (35.39)	908 (35.75)	1,589 (62.56)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	I	Hood lock support installation nut	6 (0.24) nut
B, b	Front spring support hole-inner	12.5 (0.492)	J, j	Front bumper reinforcement installation nut	10 (0.39) nut
C, c	Hood hinge installation nut-rear	8 (0.31) nut	K, k	Fender apron plate standard hole	10 (0.39)
D	Wire harness clamp installation hole	12 × 7 (0.47 × 0.28)	L, l	Front fender apron extension standard hole	10 (0.39)
E, e	Front side member standard hole	18 (0.71)	M, m	Radiator upper support installation nut	6 (0.24) nut
F, f	Front side member standard hole	10 (0.39)	N, n	Front fender installation nut	6 (0.24) nut
G, g	Radiator upper support installation nut	6 (0.24) nut	O, o	Front fender installation nut	6 (0.24) nut
H, h	Radiator side deflector installation hole	10 × 8 (0.39 × 0.31)	—	—	—

BODY OPENING AREAS (Side View: Front)

(Three-Dimensional Distance)

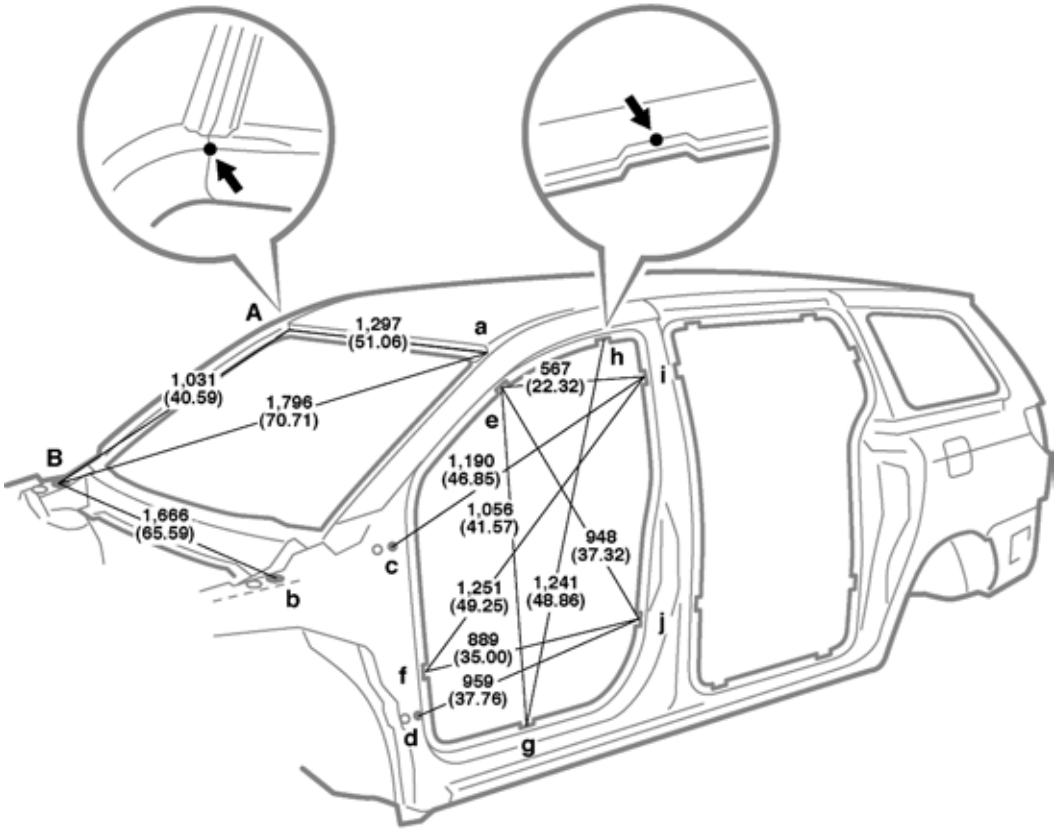

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j
1,468 (57.80)	1,658 (65.28)	1,658 (65.28)	1,416 (55.75)	1,521 (59.88)	1,658 (65.28)


E-f or e-F	E-g or e-G	E-i or e-I	F-i or f-I	F-j or f-J	G-h or g-H	I-j or i-J
1,800 (70.87)	1,884 (74.17)	1,598 (62.91)	2,021 (79.57)	1,881 (74.06)	1,971 (77.60)	1,781 (70.12)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel/Front body pillar adjoining portion	—	F, f	Front body pillar assembly mark	—
B, b	Hood hinge installation nut	8 (0.31) nut	G, g	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	H, h	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	I, i	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	J, j	Center body pillar assembly mark	—

BODY OPENING AREAS (Side View: Rear)

(Three-Dimensional Distance)

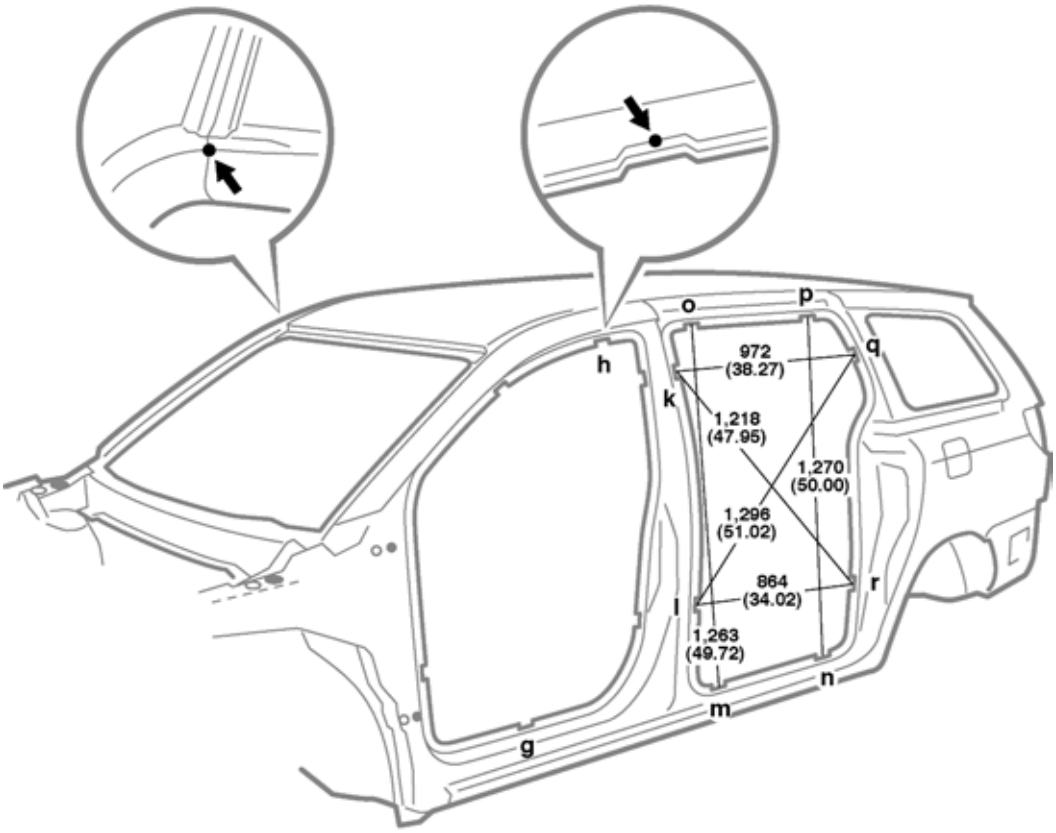

Vehicle Dimensions Left ↔ Right

K-k	L-l	M-m	N-n	O-o	P-p	Q-q	R-r
1,506 (59.29)	1,708 (67.24)	1,759 (69.25)	1,752 (68.98)	1,391 (54.76)	1,383 (54.45)	1,498 (58.98)	1,755 (69.09)


G-n or g-N	H-p or h-P	K-q or k-Q	L-p or l-P	L-r or l-R	O-r or o-R	Q-r or q-R
2,187 (86.10)	1,738 (68.43)	1,789 (70.43)	1,994 (78.50)	1,935 (76.18)	1,994 (78.50)	1,839 (72.40)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	N, m	Rocker panel assembly mark	—
H, h	Roof side rail assembly mark	—	O, o	Roof side rail assembly mark	—
K, k	Center body pillar assembly mark	—	P, p	Roof side rail assembly mark	—
L, l	Center body pillar assembly mark	—	Q, q	Quarter panel assembly mark	—
M, m	Rocker panel assembly mark	—	R, r	Quarter panel assembly mark	—

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

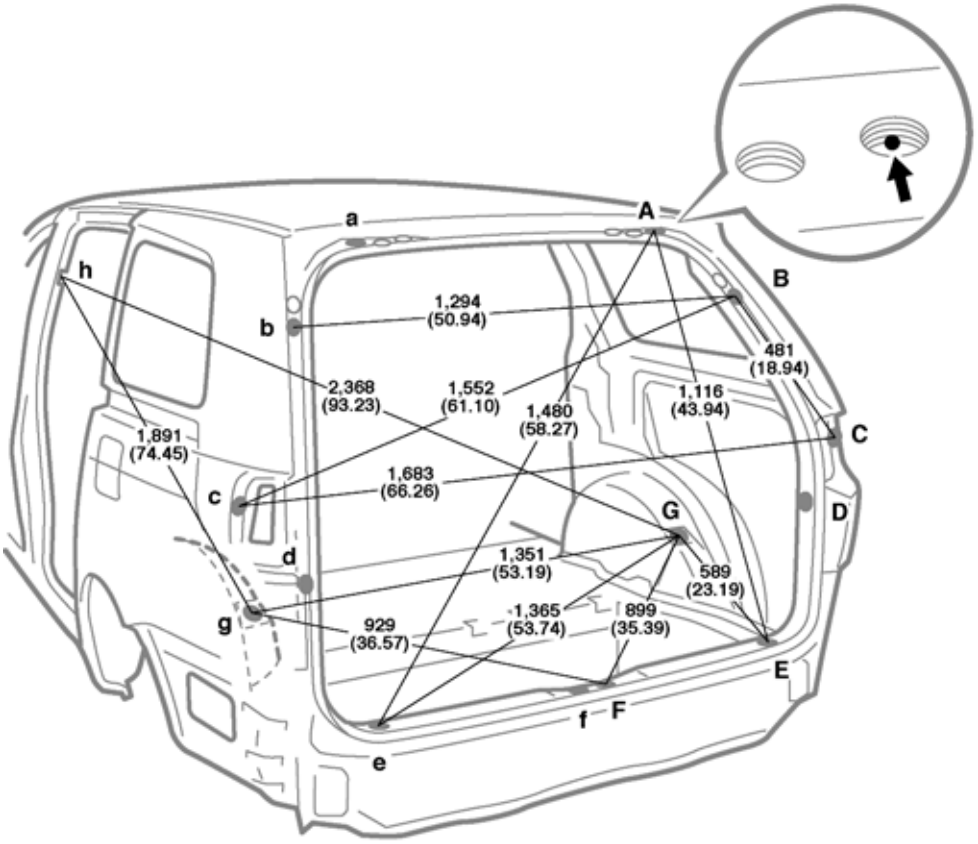

Vehicle Dimensions Left ↔ Right

D-d
1,400 (55.12)

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	12 (0.47)	E, e	Back door scuff plate installation hole	8.5 (0.335)
B, b	Back door damper stay installation nut-lower	8 (0.31) nut	F, f	Back door lock striker installation nut	8 (0.31) nut
C, c	Quarter Panel standard hole	13 (0.51)	G, g	Rear shock absorber installation hole	24 (0.94)
D, d	Quarter trim installation hole	8.5 (0.335)	H, h	Center body pillar assembly mark	—

UNDER BODY


(Three-Dimensional Distance)

Vehicle Dimensions

I-K or i-k	L-N or l-n	M-n or m-N	M-N or m-n
431 (16.97)	673 (26.50)	1,385 (54.53)	165 (6.50)

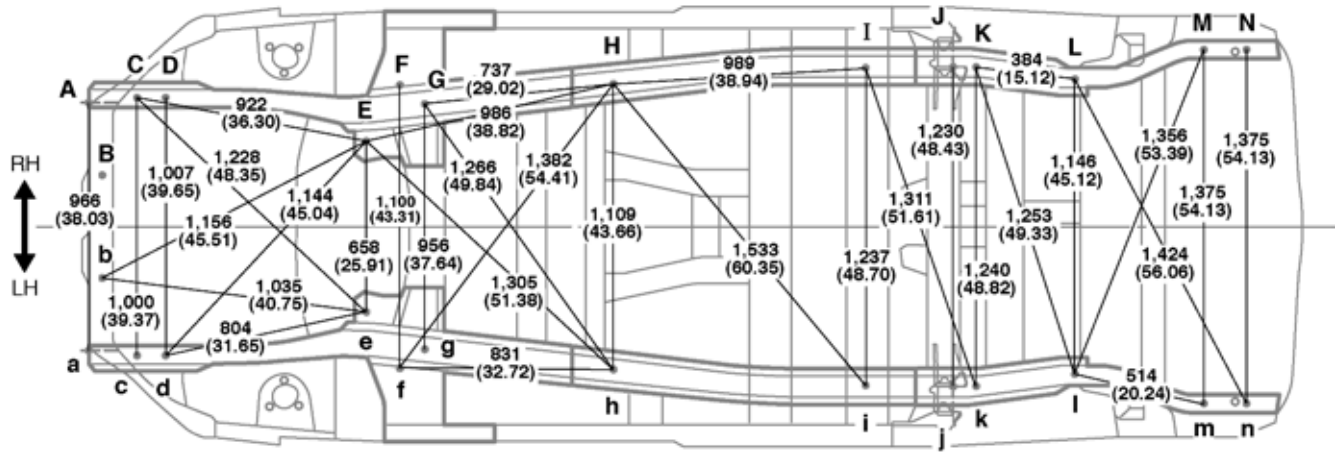

Front

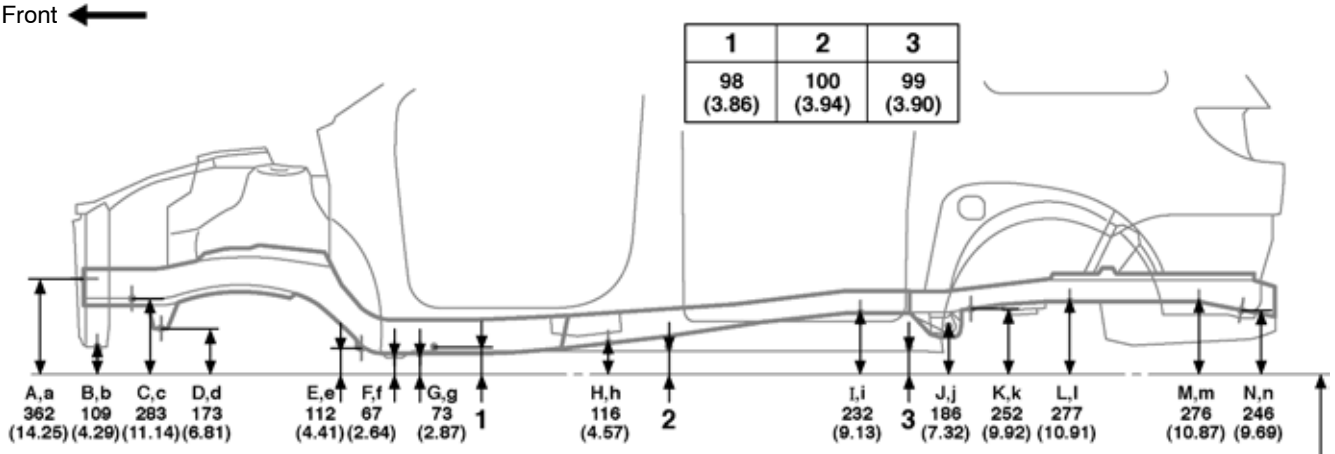


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	H, h	Front floor under reinforcement standard hole	18 (0.71)
B, b	Front crossmember standard hole	15 (0.59)	I, i	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	J, j	Trailing arm installation hole-inner	15 (0.59)
D, d	Front frame installation nut	16 (0.63) nut	K, k	Rear floor side member standard hole	18 (0.71)
E, e	Front frame installation nut	16 (0.63) nut	L, l	Rear floor side member standard hole	18 (0.71)
F, f	Torque box front standard hole	25 (0.98)	M, m	Rear floor side member standard hole	18 (0.71)
G, g	Front side member standard hole	18 (0.71)	N, n	Transport hook installation nut	12 (0.47) nut

UNDER BODY
2WD

(Two-Dimensional Distance)

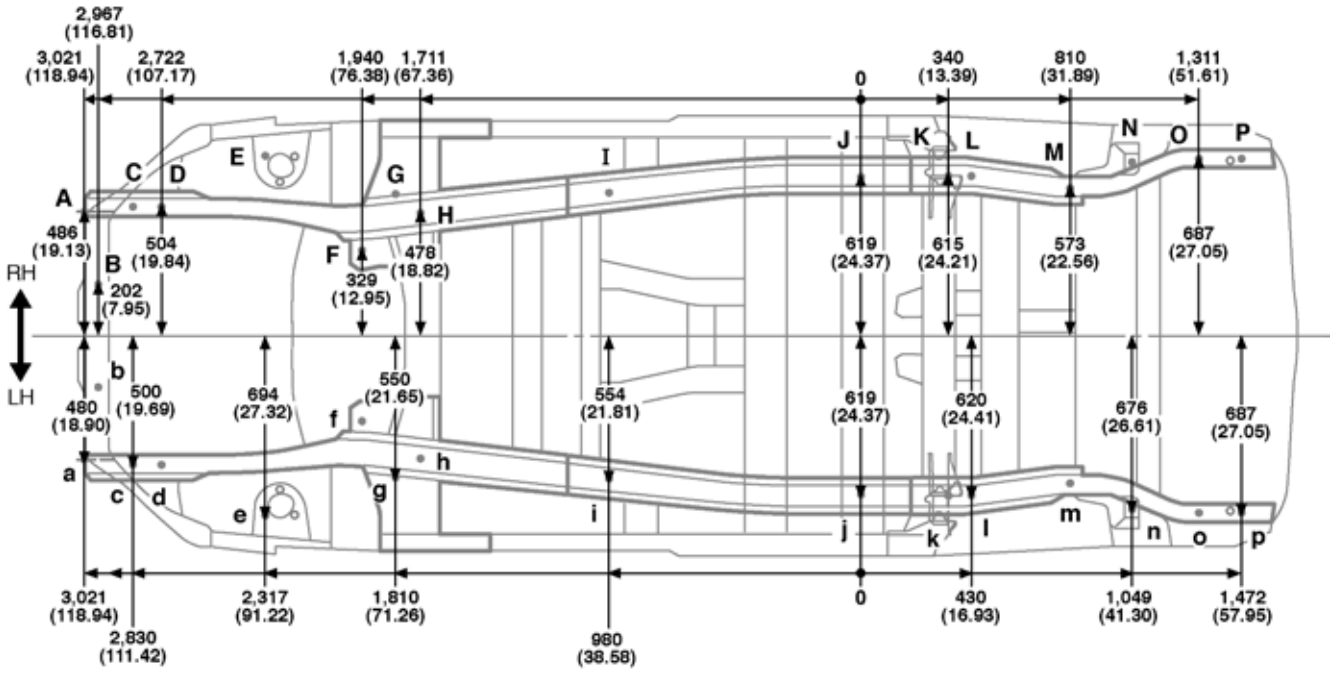


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut	I, i	Front floor under reinforcement standard hole	18 (0.71)
B, b	Front crossmember standard hole	15 (0.59)	J, j	Front floor under reinforcement standard hole	18 (0.71)
C, c	Front side member standard hole	18 (0.71)	K, k	Trailing arm installation hole-inner	15 (0.59)
D, d	Front frame installation nut	16 (0.63) nut	L, l	Rear floor side member standard hole	18 (0.71)
E, e	Front spring support hole outer-front	12.5 (0.492)	M, m	Rear floor side member standard hole	18 (0.71)
F, f	Front frame installation nut	16 (0.63) nut	N, n	Rear shock absorber installation hole	24 (0.94)
G, g	Torque box front standard hole	25 (0.98)	O, o	Rear floor side member standard hole	18 (0.71)
H, h	Front side member standard hole	18 (0.71)	P, p	Transport hook installation nut	12 (0.47) nut

UNDER BODY
4WD

(Two-Dimensional Distance)

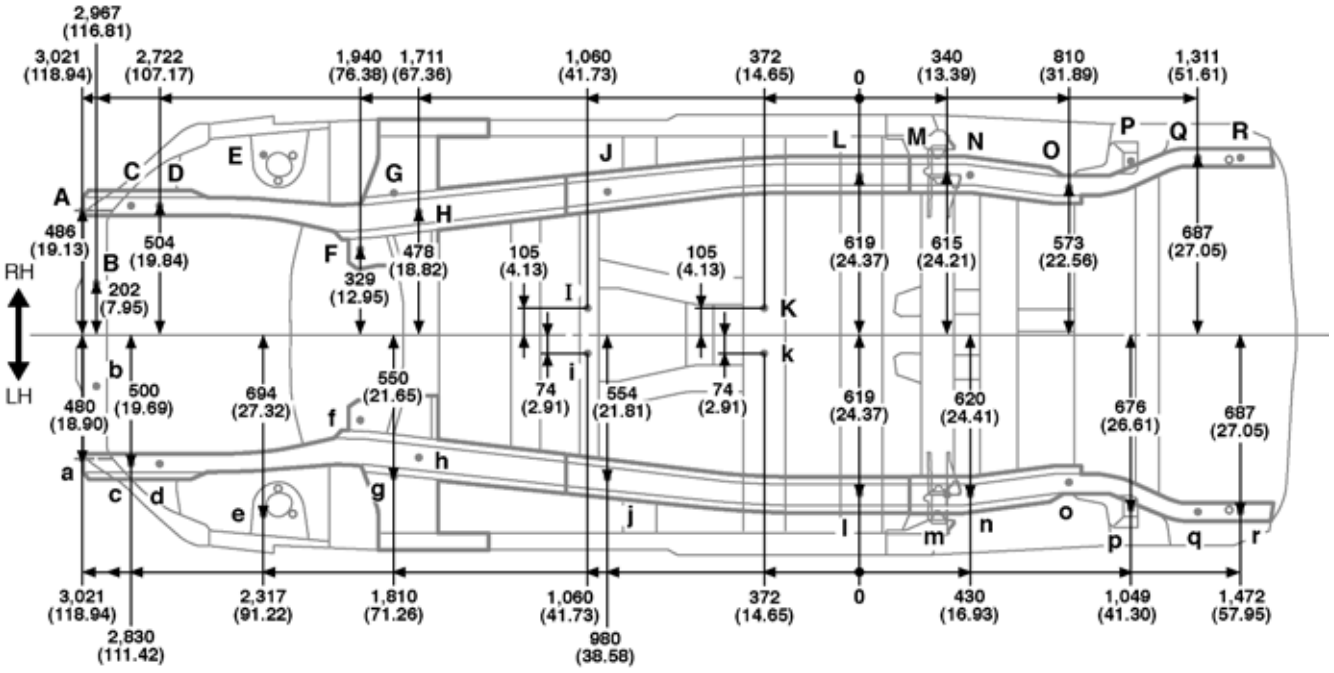


mm (in.)

Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation nut	10 (0.39) nut
B, b	Front crossmember standard hole	15 (0.59)
C, c	Front side member standard hole	18 (0.71)
D, d	Front frame installation nut	16 (0.63) nut
E, e	Front spring support hole outer-front	12.5 (0.492)
F, f	Front frame installation nut	16 (0.63) nut
G, g	Torque box front standard hole	25 (0.98)
H, h	Front side member standard hole	18 (0.71)
I, i	Propeller shaft center support bearing installation nut	10 (0.39) nut
J, j	Front floor under reinforcement standard hole	18 (0.71)
K, k	Propeller shaft center support bearing installation nut	10 (0.39) nut
L, l	Front floor under reinforcement standard hole	18 (0.71)
M, m	Trailing arm installation hole-inner	15 (0.59)
N, n	Rear floor side member standard hole	18 (0.71)
O, o	Rear floor side member standard hole	18 (0.71)
P, p	Rear shock absorber installation hole	24 (0.94)
Q, q	Rear floor side member standard hole	18 (0.71)
R, r	Transport hook installation nut	12 (0.47) nut

FRONT FRAME
2WD

(Three-Dimensional Distance)

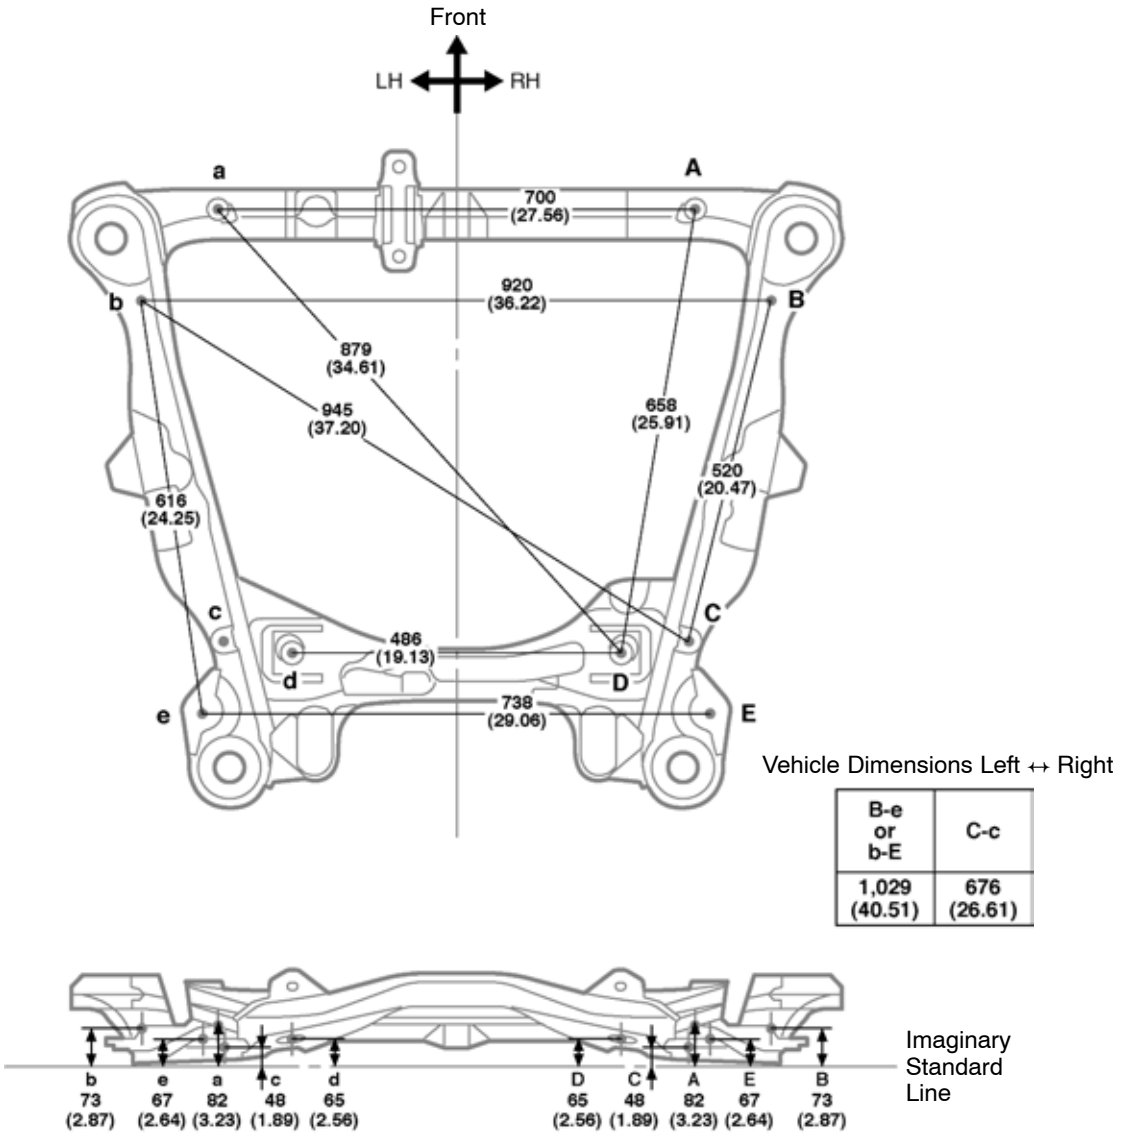

Vehicle Dimensions Left ↔ Right


B-e or b-E	C-c
1,029 (40.51)	676 (26.61)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—

FRONT FRAME
4WD

(Three-Dimensional Distance)

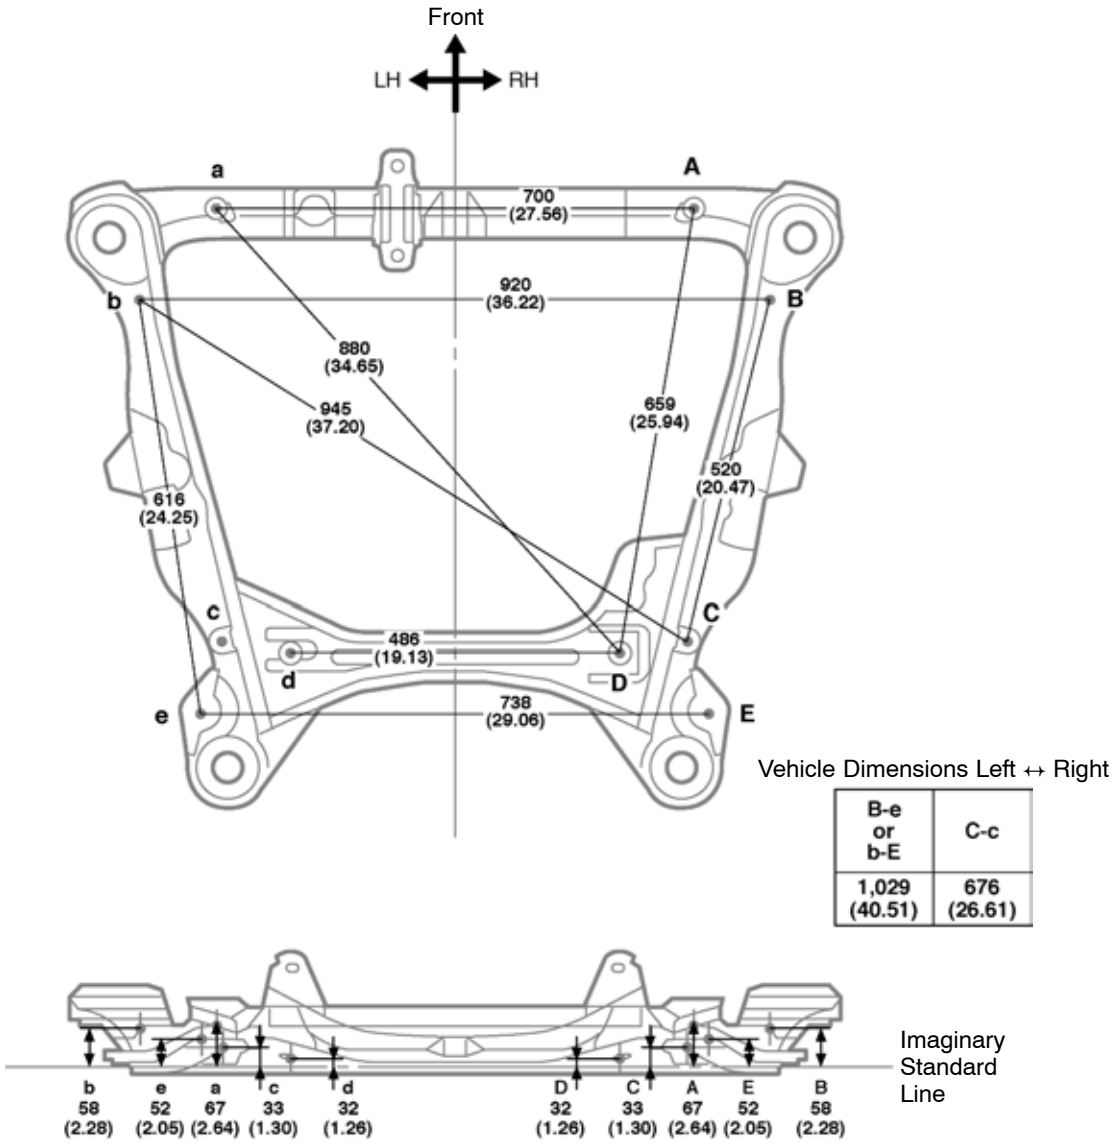

Vehicle Dimensions Left ↔ Right


B-e or b-E	C-c
1,029 (40.51)	676 (26.61)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—

FRONT FRAME
2WD

(Two-Dimensional Distance)

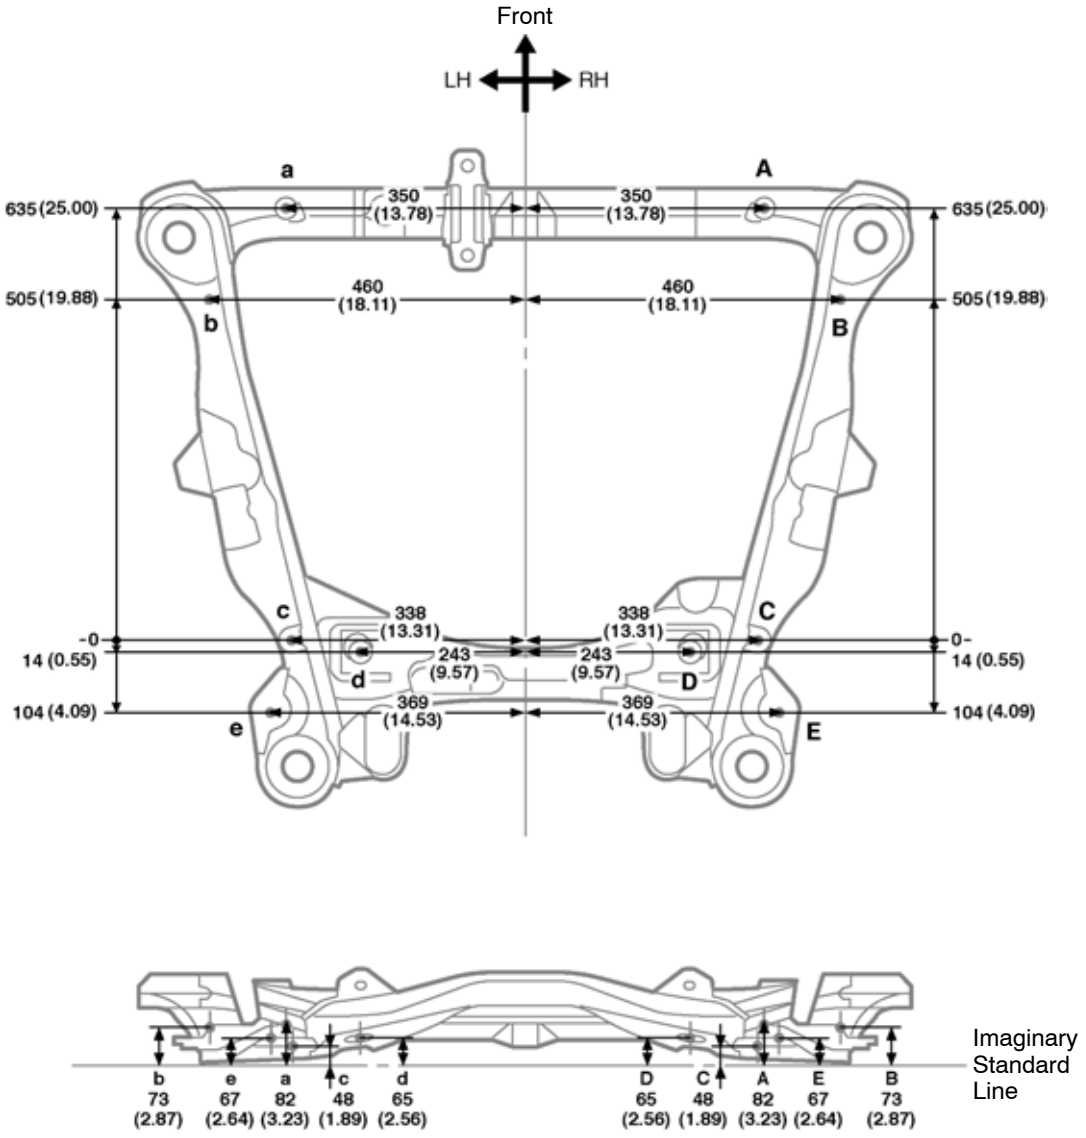


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—

FRONT FRAME
4WD

(Two-Dimensional Distance)

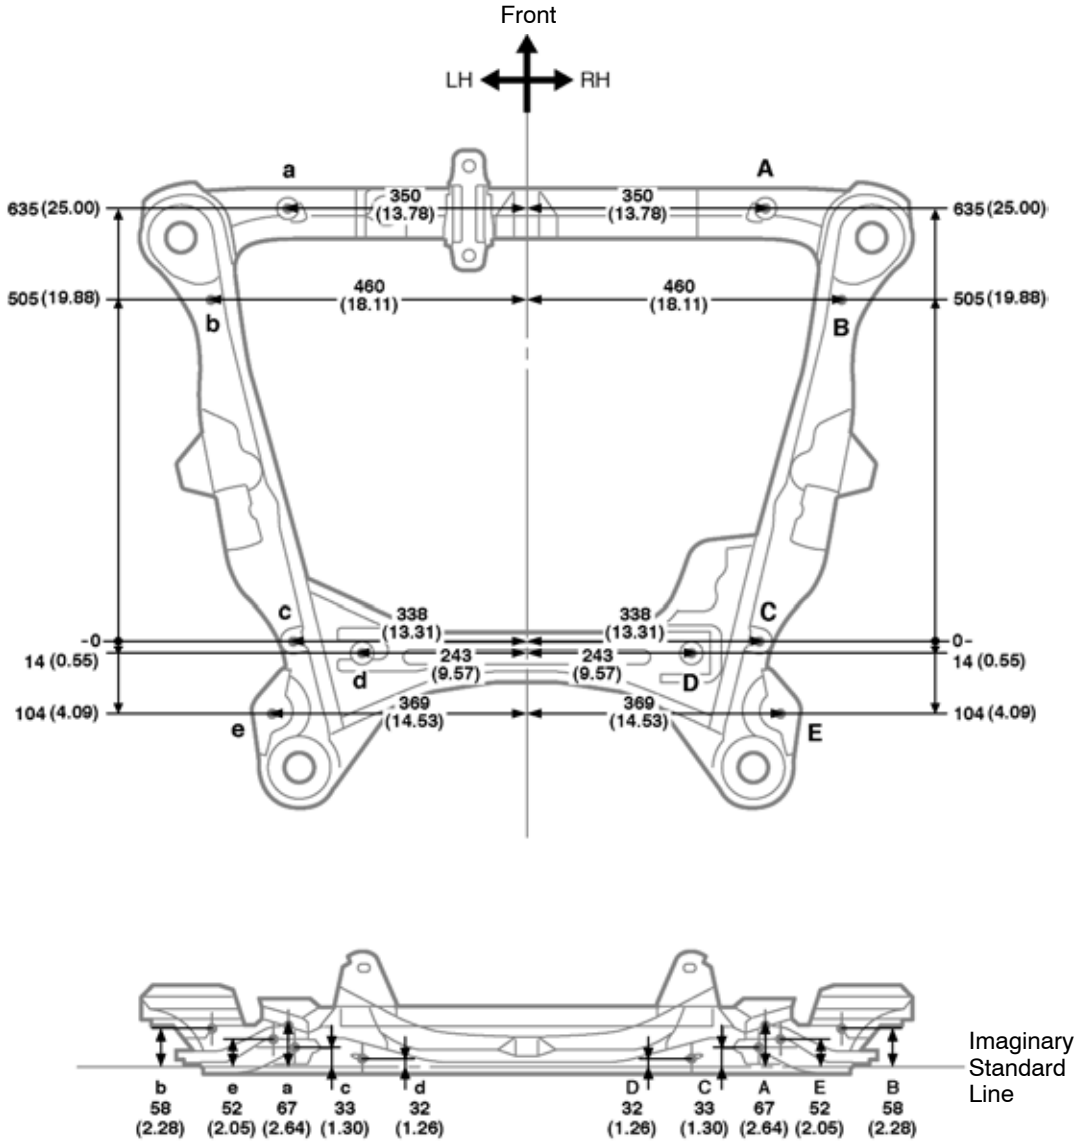

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front frame standard hole	13 (0.51)	D, d	Front frame standard hole	13 (0.51)
B, b	Front frame standard hole	13 (0.51)	E, e	Lower arm installation hole	15 (0.59)
C, c	Front frame standard hole	13 (0.51)	—	—	—