
BODY PANEL SEALING AREAS

HINT:
1) Prior to applying body sealer, clean the area with a rag soaked in grease,wax and silicone remover.
2) If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
3) Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.
4) If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.


++++++++++	Flat Finishing	————	No Flat Finishing

1. ENGINE COMPARTMENT

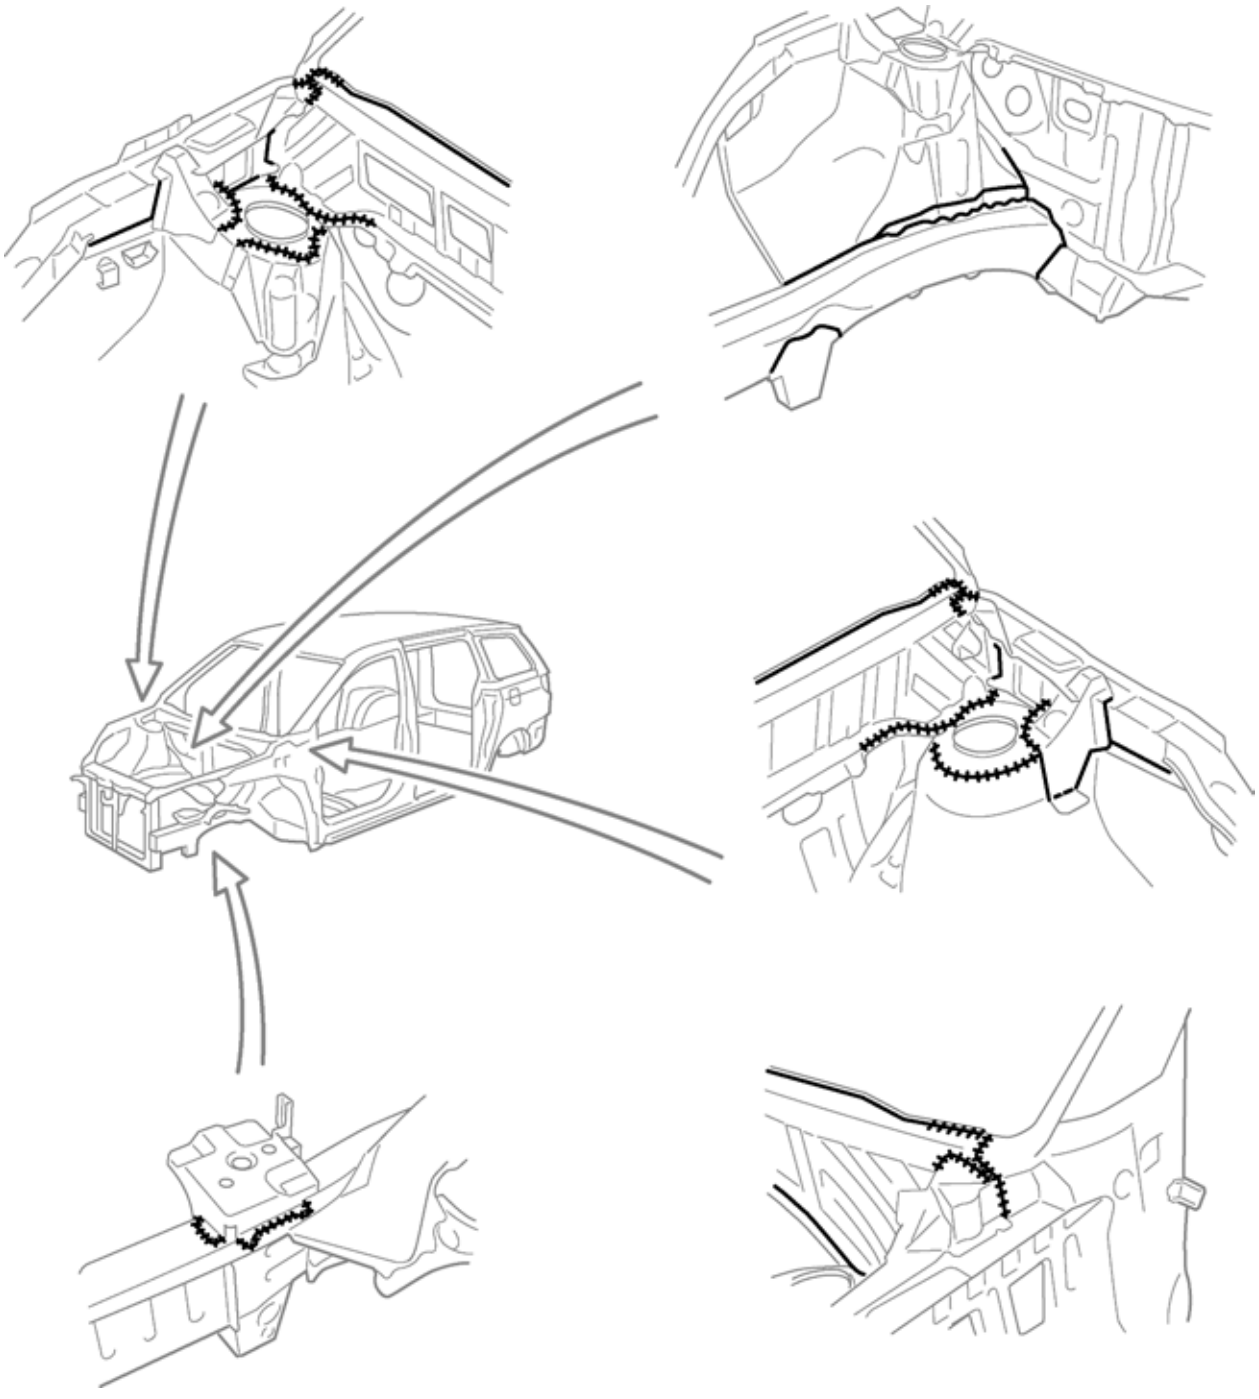


F15038

2. OUTSIDE

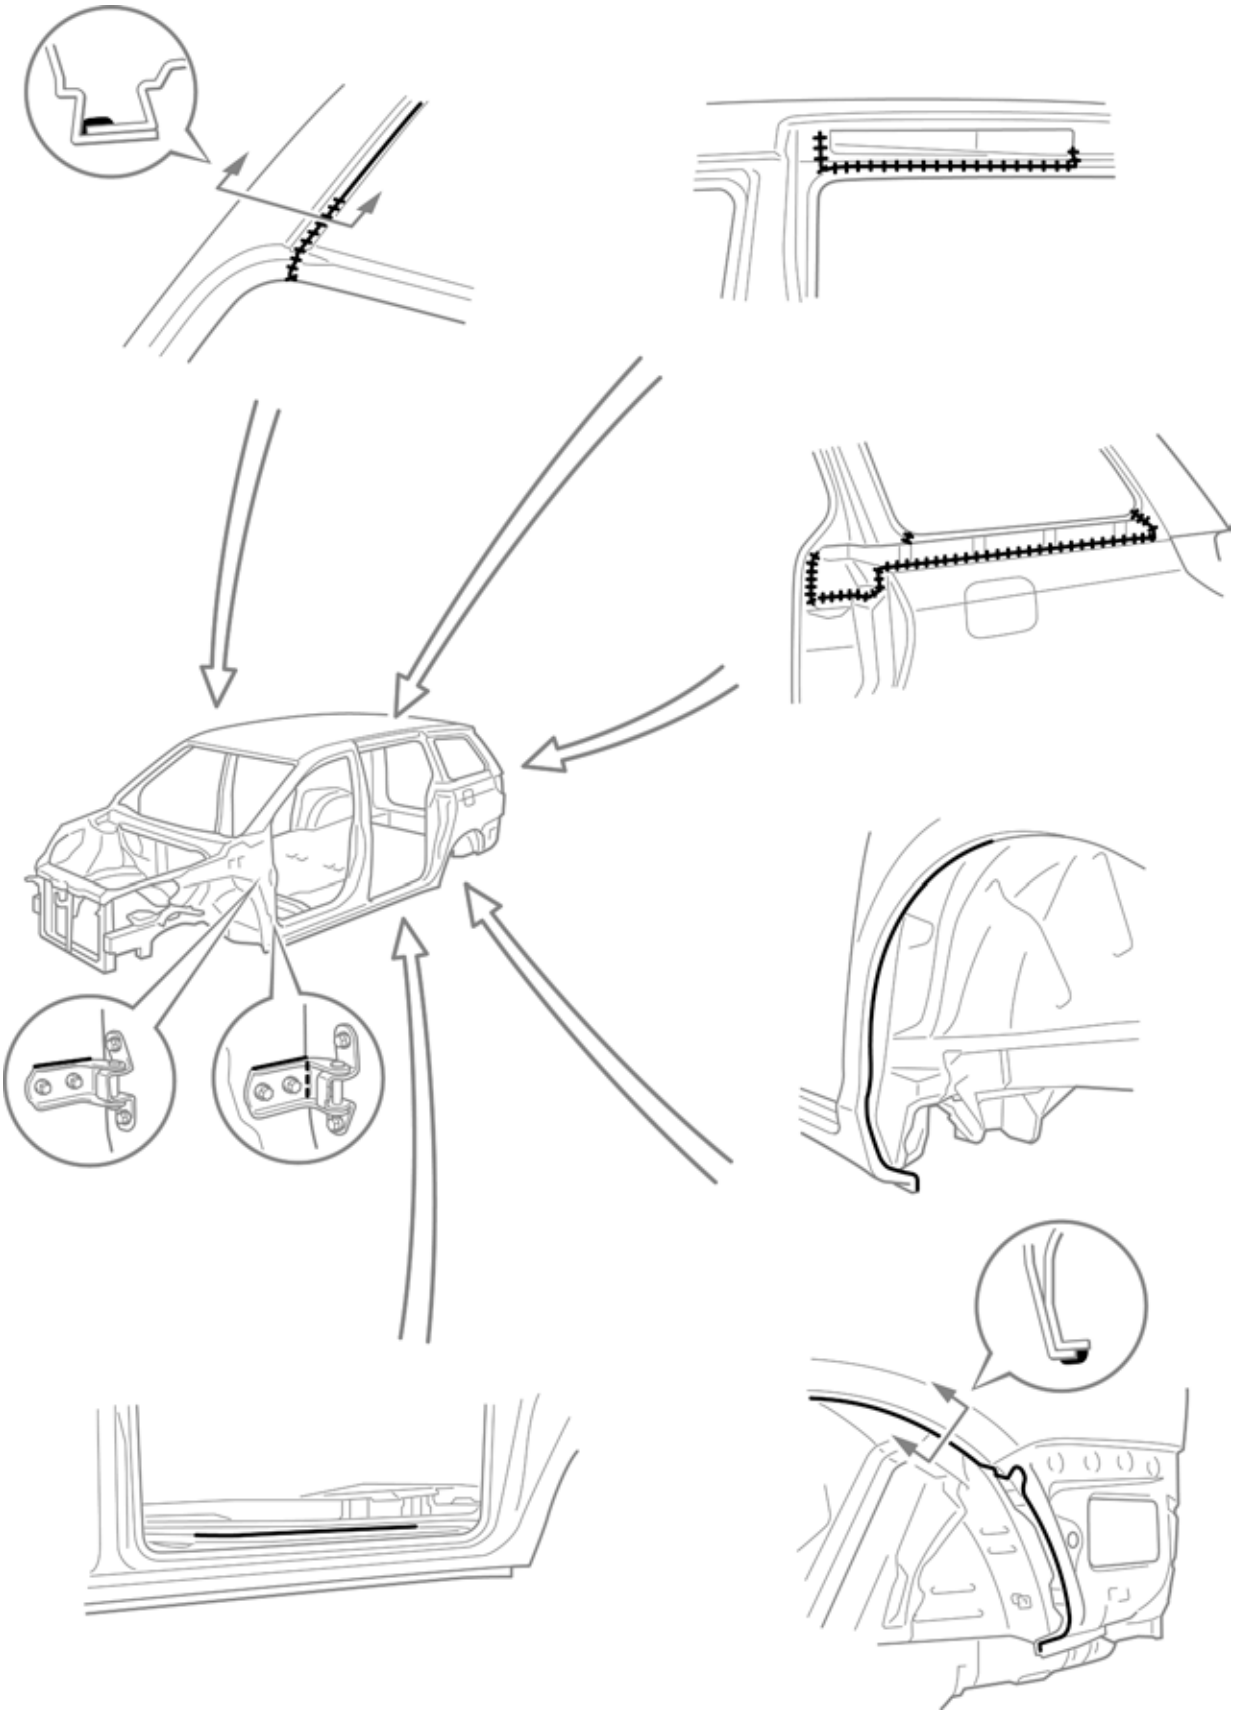

F15039


3. INSIDE

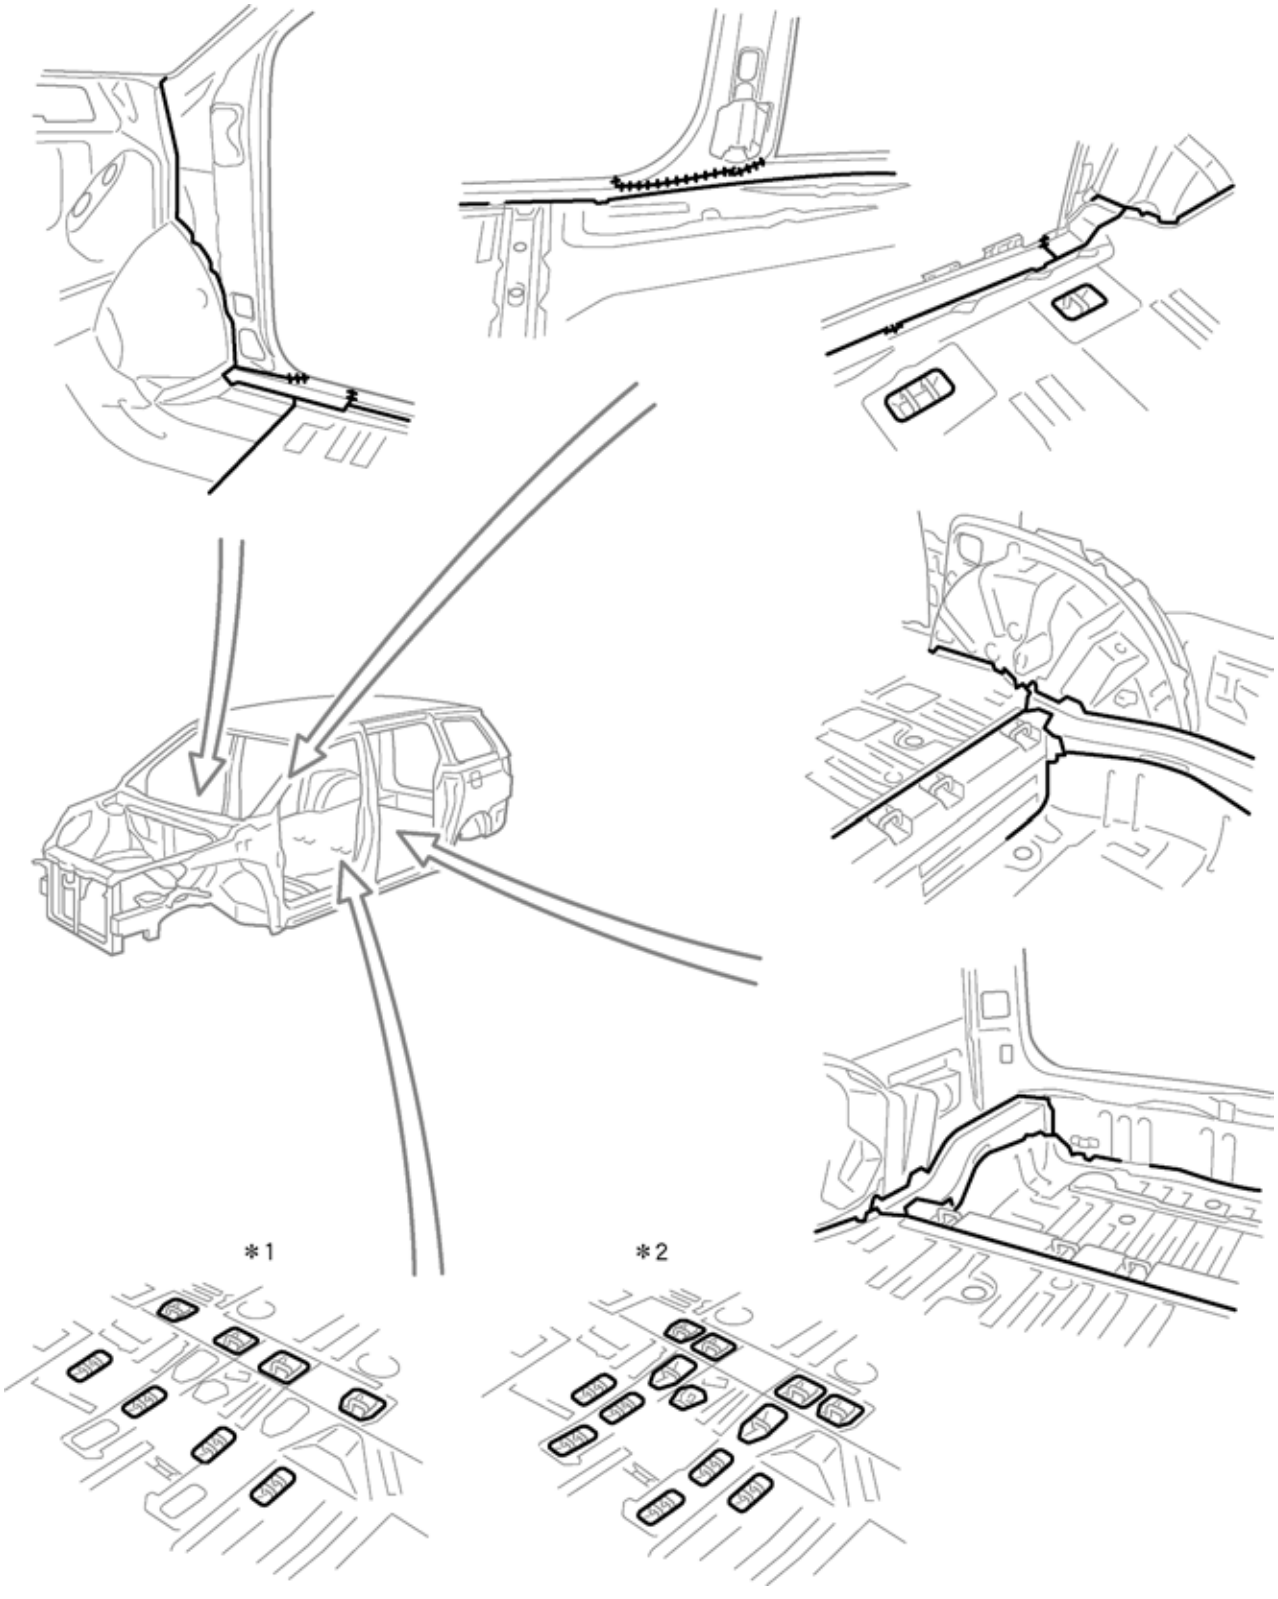

F15039


*1 7 Passengers Vehicle *2 8 Passengers Vehicle

4. REAR LUGGAGE COMPARTMENT

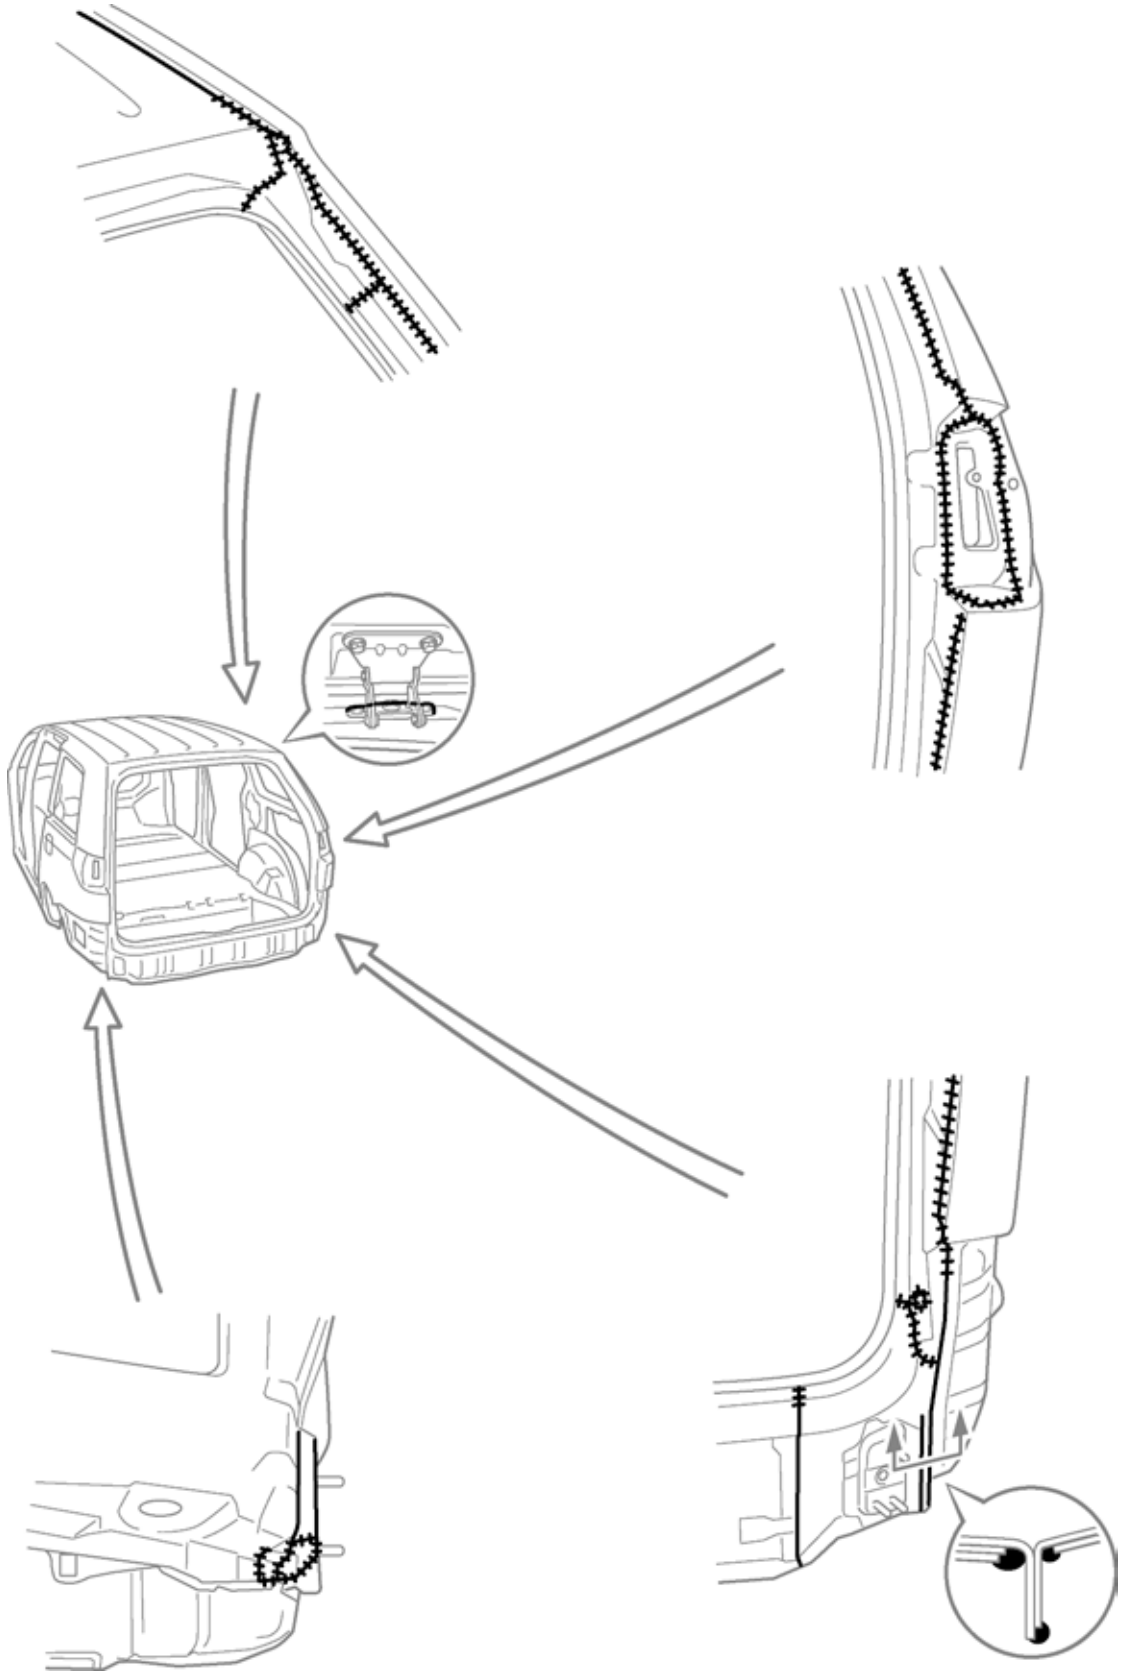


F15041

5. DOOR PARTS

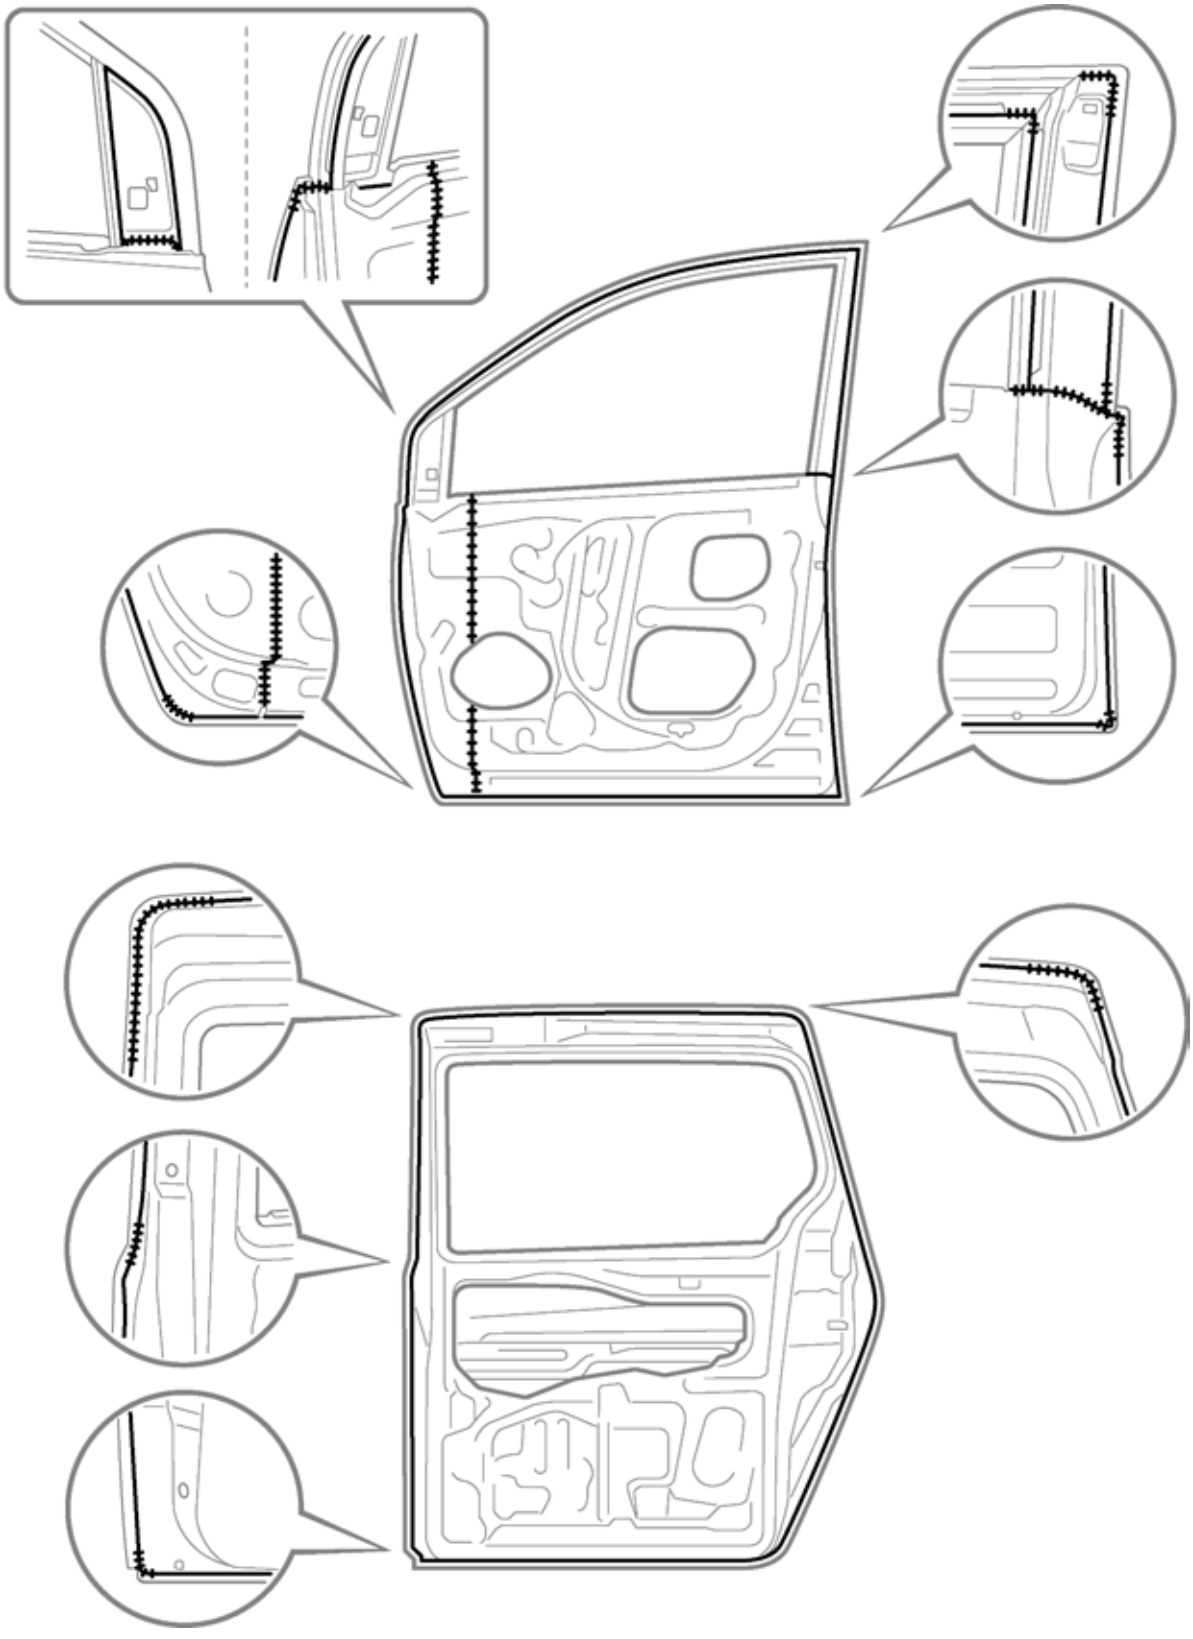

F15042

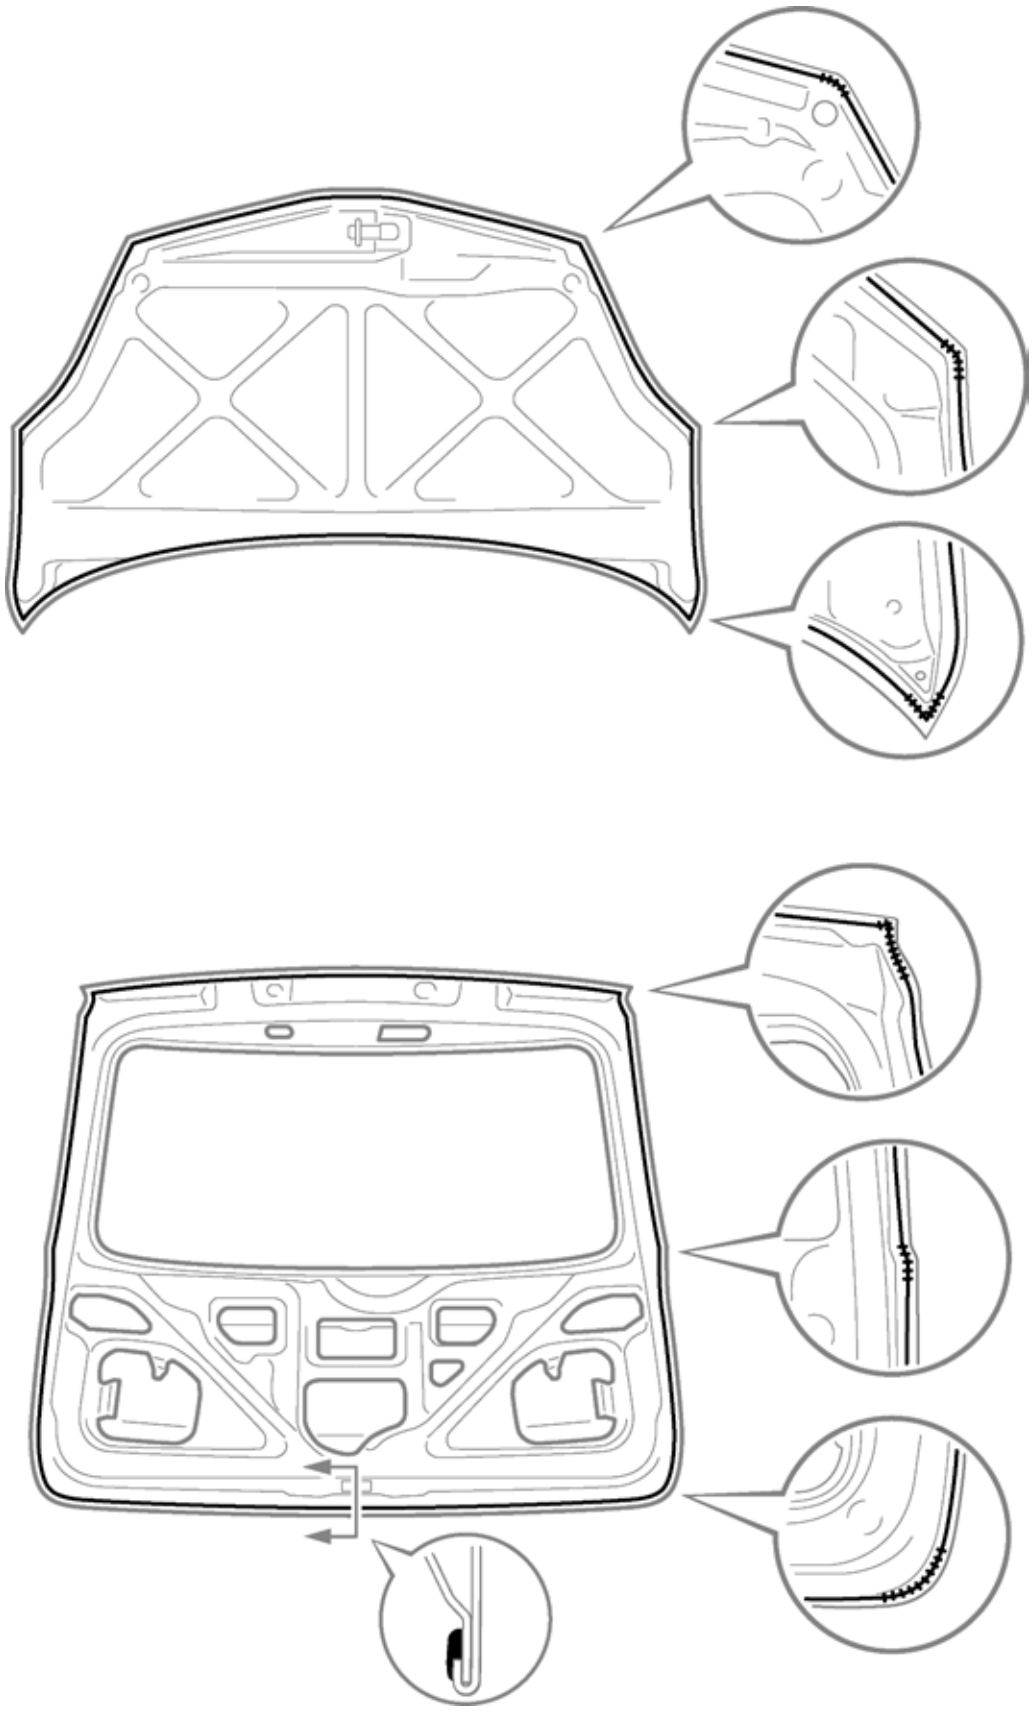

F15043