
BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:
1) *Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.*
2) *Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.*
3) *Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidently applied to other areas.*







③

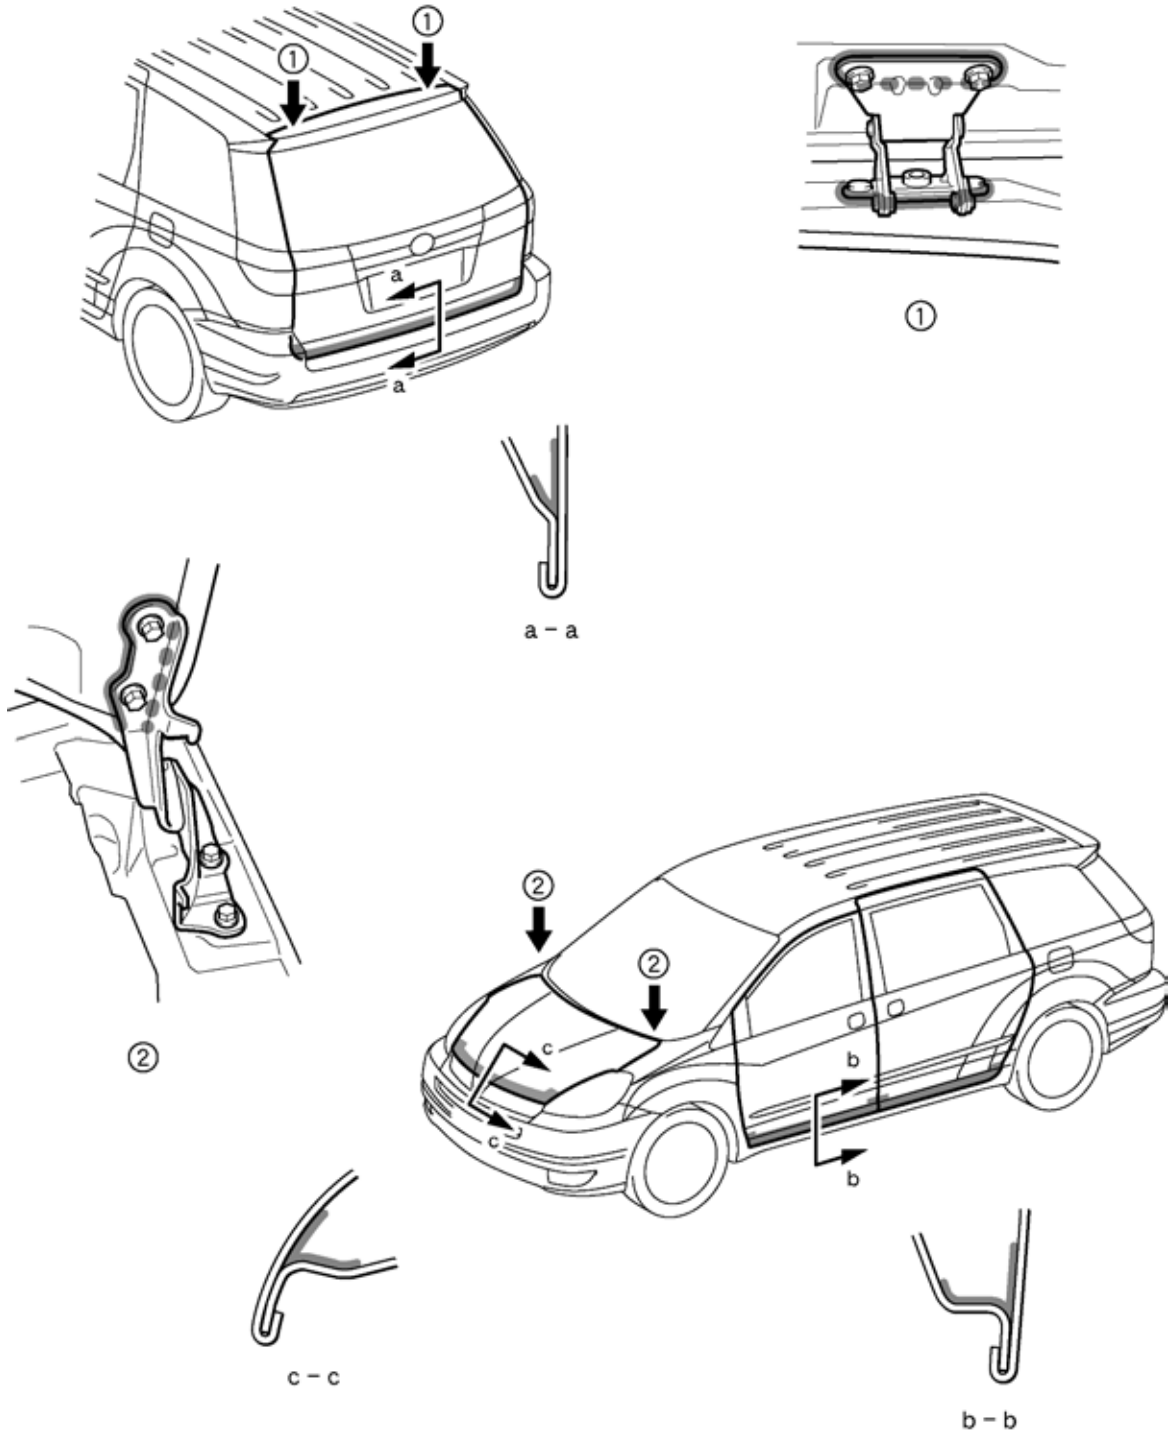


④

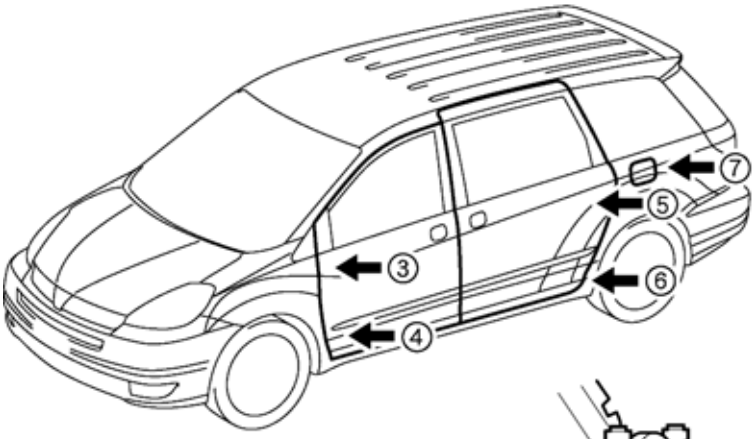




⑦



⑤



⑥

F15047