
# SILENCER SHEET INSTALLATION AREAS

*HINT:*
*1) Use a silencer seat as a replacement of damping coat in the area where damping coat is applied.*

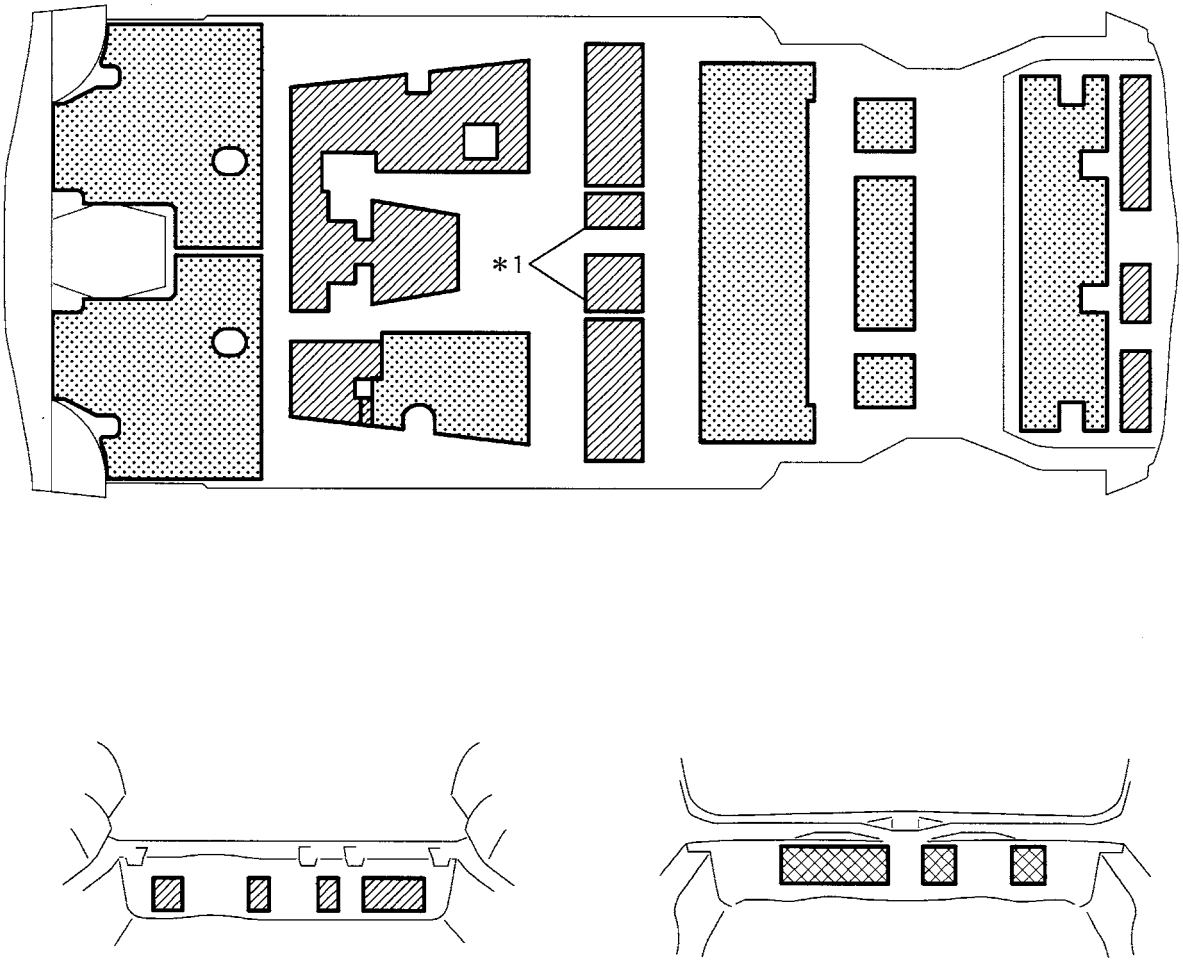


| Thickness of Silencer Sheet | | | | | |
|---|---|---|---|---|---|
| | 2.0mm (0.079in.) | | 2.4mm (0.094in.) | | 3.7mm (0.146in.) |

*1 7 Passengers Vehicle Only