


BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS

HINT:
1) Anti-chipping paint should be applied to some areas before the second coat and to others after the top coat.
2) If other areas are accidentally coated, wipe of the paint immediately with a rag soaked in grease, wax and silicone remover.

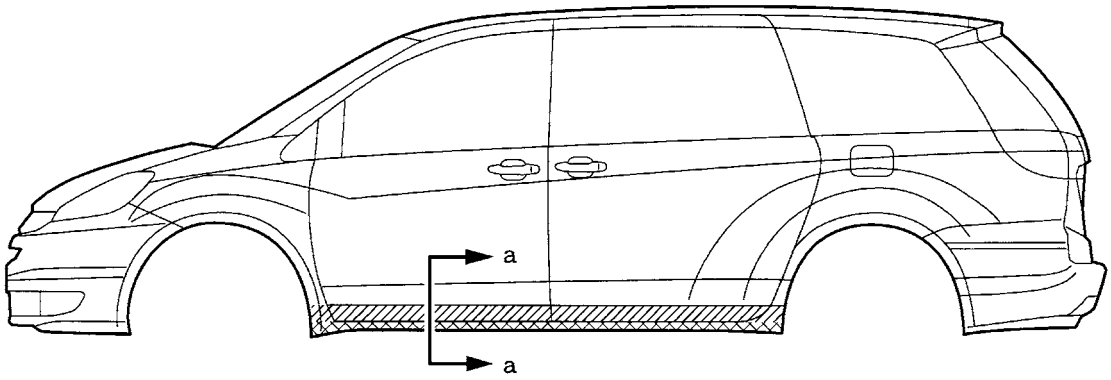

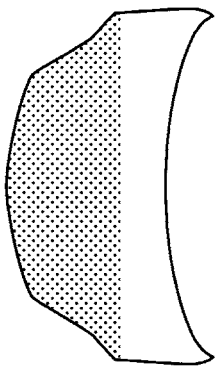



a – a

F15049

	PVC		Urethan		Soft – Chip (Poly Olefine)