

RADIATOR SIDE SUPPORT (ASSY)



F21432-A

REPLACEMENT

With the radiator upper support removed.

REMOVAL

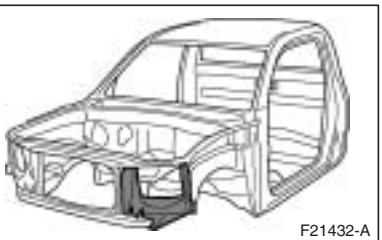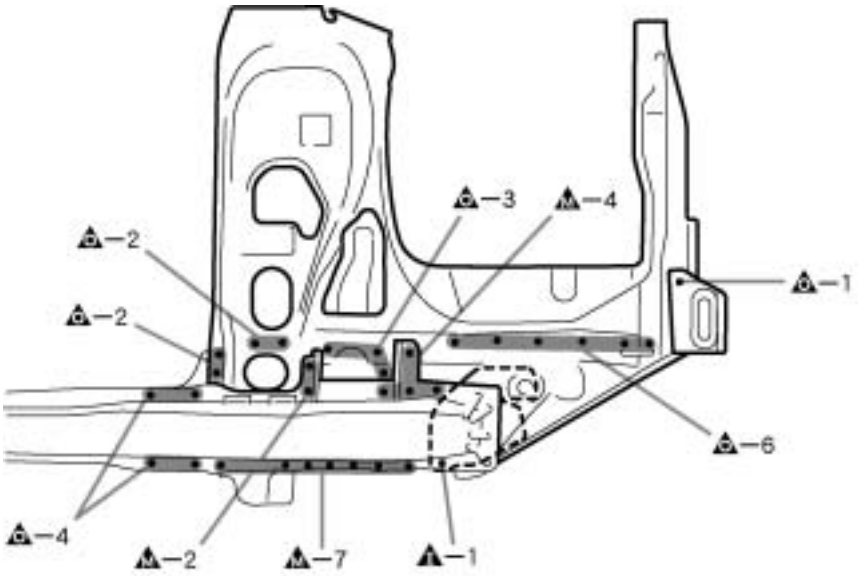


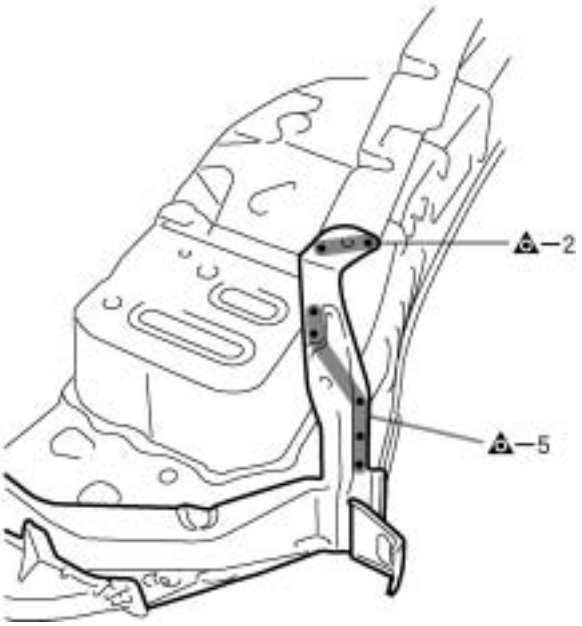

F21432

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

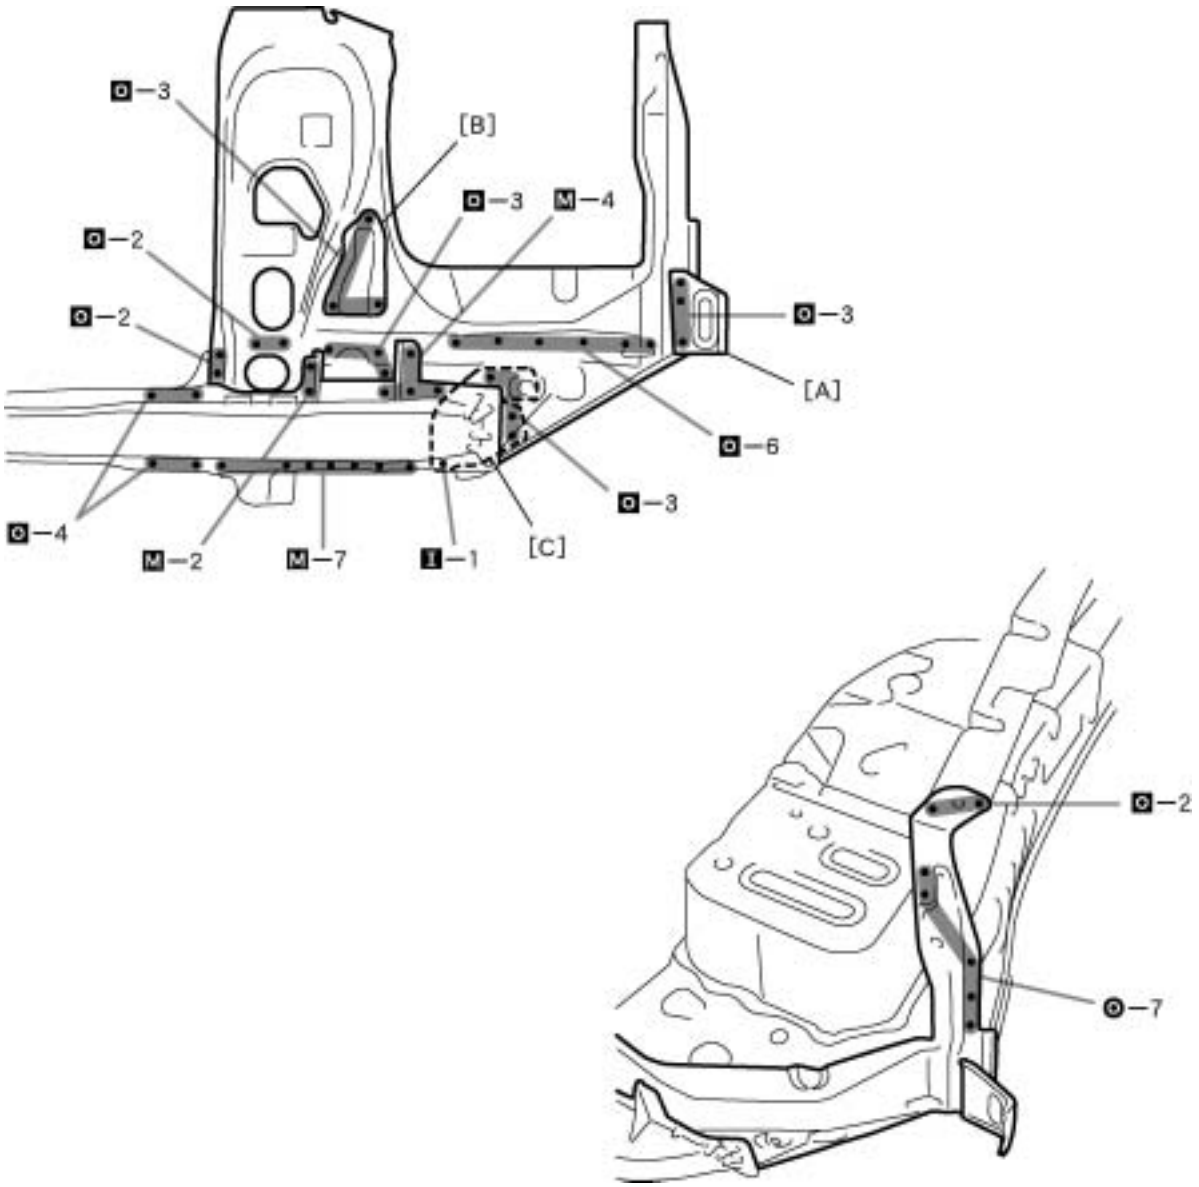

F21433

POINT

1 inspect the fitting of the front fender, etc., before welding, since affects the appearance of the finish.

PART NAME

[A] Fender Apron Retainer [B] Front End Panel Mounting Bracket
[C] Front Crossmember upper Gusset