
BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT

(Three-Dimensional Distance)

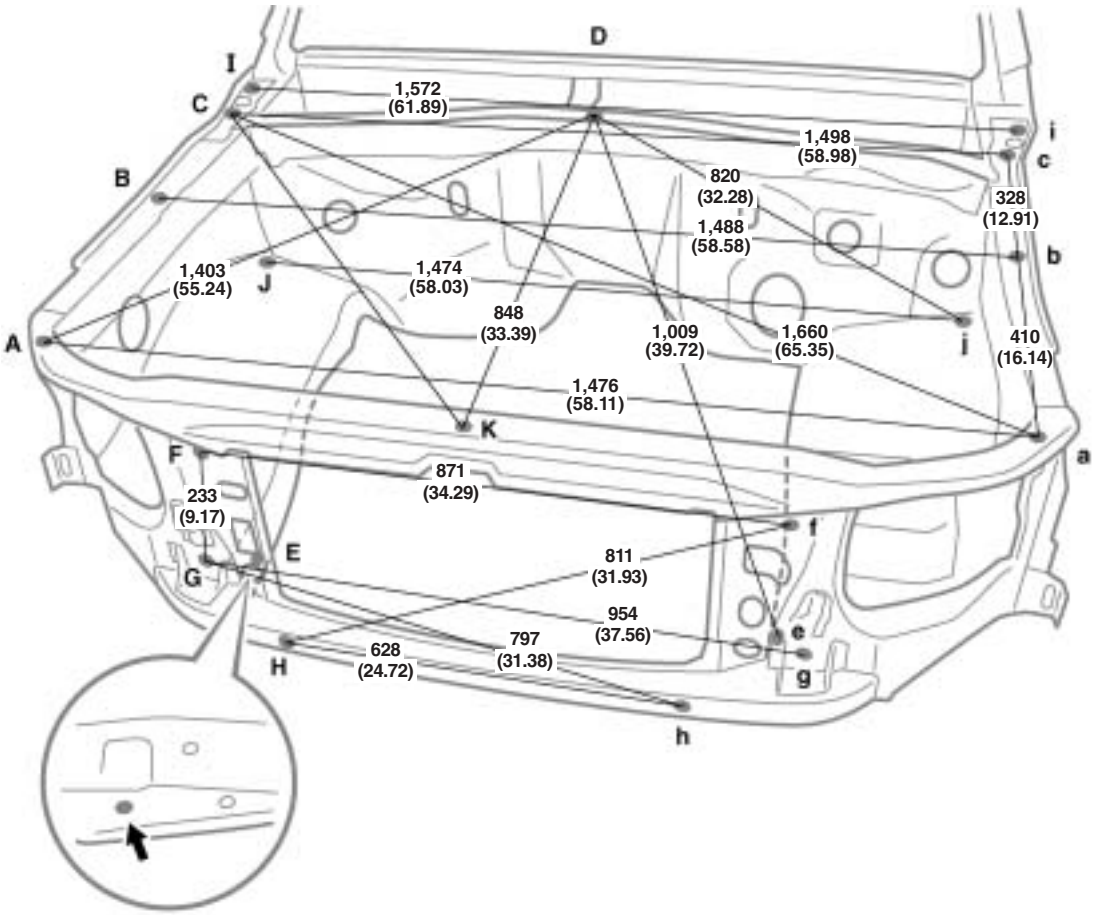

Vehicle Dimensions

A-C or a-c	B-c or b-C	B-D or b-D	C-I or c-i	C-i or c-I	F-g or f-G	F-H or f-h	G-H or g-h
738 (29.06)	1,529 (60.20)	813 (32.01)	146 (5.75)	1,542 (60.71)	941 (37.05)	332 (13.07)	192 (7.56)

Height from Imaginary Standard Line

A, a	C, c	K
920 (36.22)	994 (39.13)	925 (36.42)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	G, g	Front bumper bracket installation hole	8 (0.31)
B, b	Front fender installation nut	6 (0.24) nut	H, h	Front crossmember standard hole	19 (0.75)
C, c	Front fender installation nut	6 (0.24) nut	I, i	Hood hinge installation nut-rear	6 (0.24) nut
D	Cowl louver installation hole	10 (0.39)	J, j	Front fender liner installation hole	9 × 9 (0.35 × 0.35)
E, e	Front fender apron standard hole	8 (0.31)	K	Radiator support cover installation hole	8 (0.31)
F, f	Radiator support standard hole	10 (0.39)	—	—	—

BODY OPENING AREAS (Side View)
Regular Cab

(Three-Dimensional Distance)

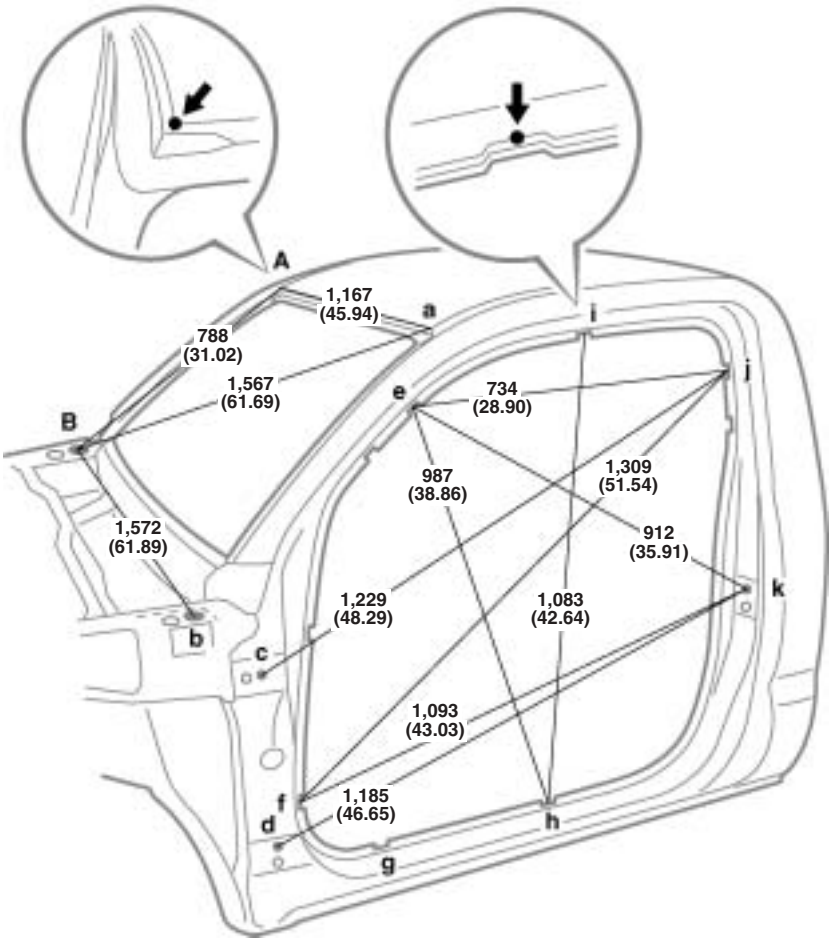

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,366 (53.78)	1,519 (59.80)	1,519 (59.80)	1,519 (59.80)	1,277 (50.28)	1,378 (54.25)	1,614 (63.54)

E-f or e-F	E-h or e-H	E-i or e-I	E-j or e-J	E-k or e-K	F-j or f-J	F-k or f-K	G-h or g-H	H-i or h-I	J-k or j-K
1,668 (65.67)	1,746 (68.74)	1,388 (54.65)	1,556 (61.26)	1,742 (68.58)	1,951 (76.81)	1,910 (75.20)	1,568 (61.73)	1,764 (69.45)	1,582 (62.28)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	J, j	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Door lock striker installation nut	8 (0.31) nut
F, f	Front body pillar assembly mark	—	—	—	—

BODY OPENING AREAS (Side View)
Access Cab

(Three-Dimensional Distance)

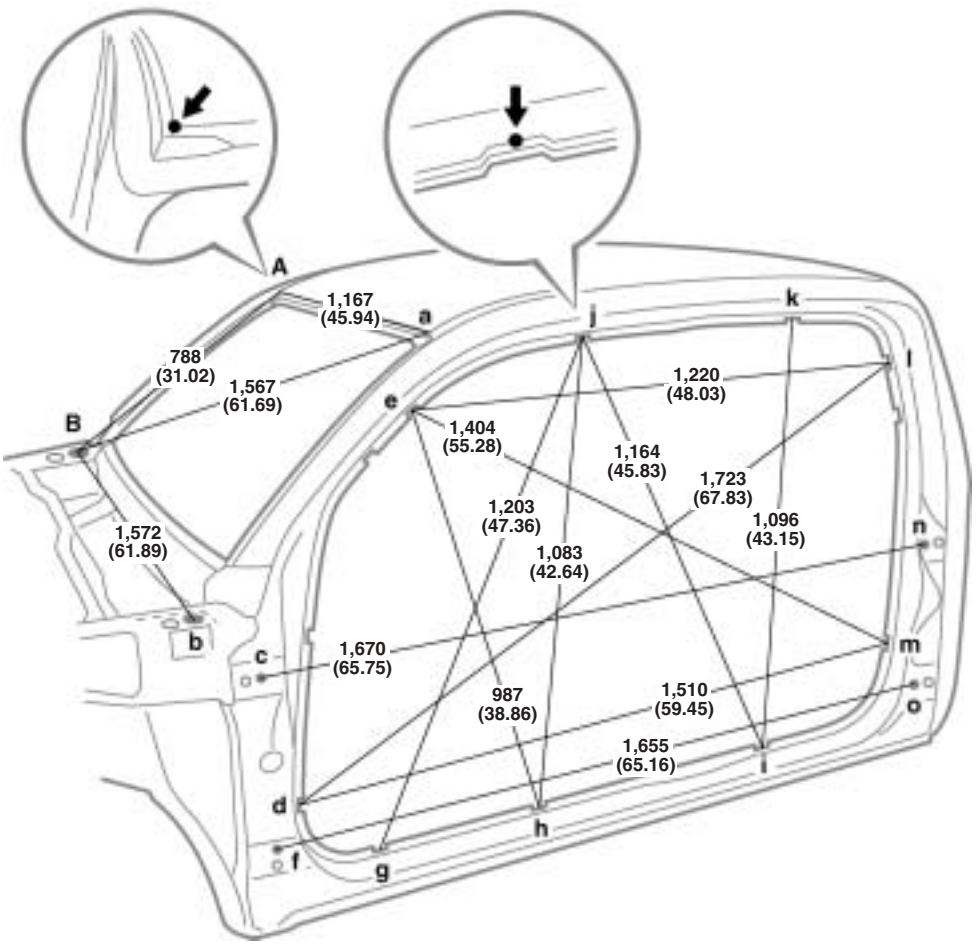

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l	M-m
1,366 (53.78)	1,519 (59.80)	1,519 (59.80)	1,519 (59.80)	1,506 (59.29)	1,277 (50.28)	1,269 (49.96)	1,366 (53.78)	1,515 (59.65)

E-f or e-F	E-h or e-H	F-l or f-L	F-m or f-M	G-i or g-I	H-j or h-J	I-j or i-J	L-m or l-M
1,668 (65.67)	1,746 (68.74)	2,245 (88.39)	2,141 (84.29)	1,816 (71.50)	1,764 (69.45)	1,810 (71.26)	1,617 (63.66)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	I, i	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	J, j	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	K, k	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	L, l	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	M, m	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	N, n	Rear door hinge installation nut	8 (0.31) nut
G, g	Rocker panel assembly mark	—	O, o	Rear door hinge installation nut	8 (0.31) nut
H, h	Rocker panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View: Front)
Double Cab

(Three-Dimensional Distance)

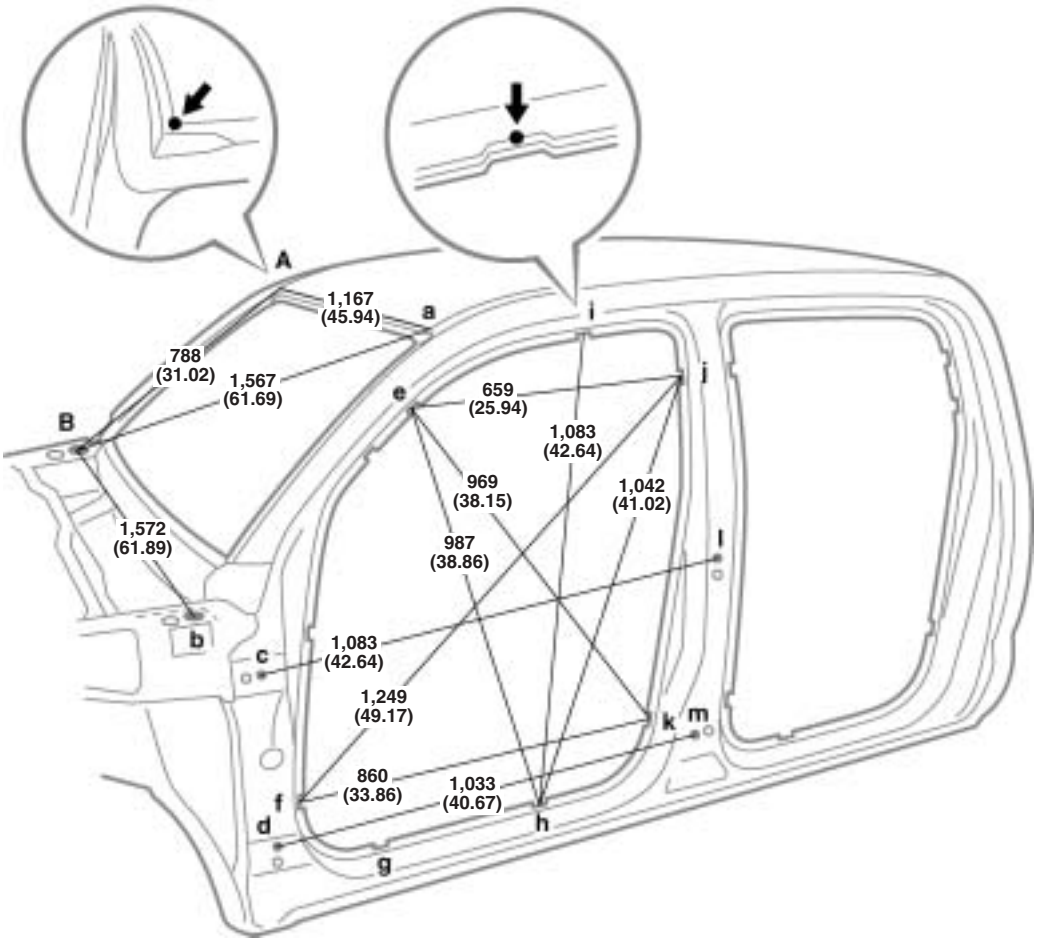

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,366 (53.78)	1,519 (59.80)	1,519 (59.80)	1,519 (59.80)	1,277 (50.28)	1,378 (54.25)	1,614 (63.54)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-h or g-H	H-i or h-I	J-k or j-K
1,668 (65.67)	1,746 (68.74)	1,522 (59.92)	1,911 (75.24)	1,743 (68.62)	1,568 (61.73)	1,764 (69.45)	1,656 (65.20)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation nut	8 (0.31) nut
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	8 (0.31) nut

BODY OPENING AREAS (Side View: Rear)
Double Cab

(Three-Dimensional Distance)

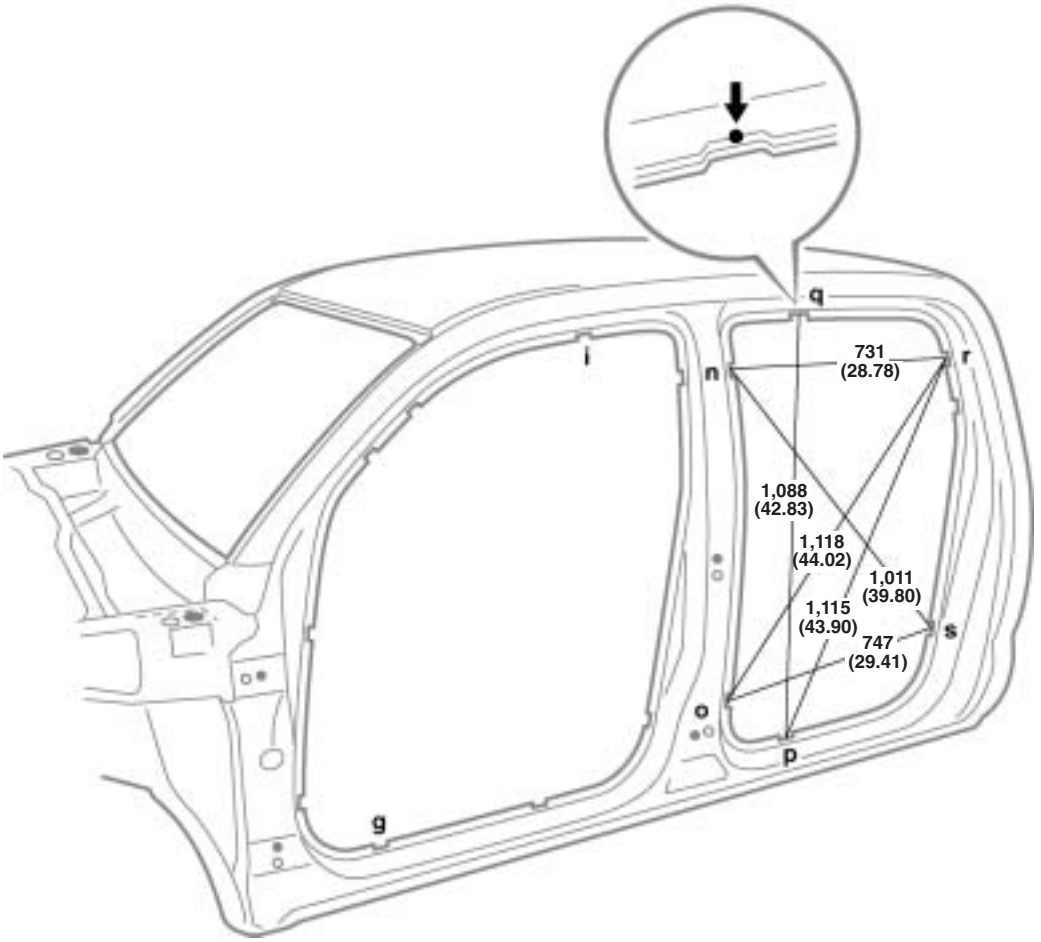

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,380 (54.33)	1,519 (59.80)	1,507 (59.33)	1,274 (50.16)	1,379 (54.29)	1,515 (59.65)

G-p or g-P	I-g or i-Q	N-p or n-P	N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
1,858 (73.15)	1,422 (55.98)	1,739 (68.46)	1,561 (61.46)	1,764 (69.45)	1,691 (66.57)	1,762 (69.37)	1,620 (63.78)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—

FRAME DIMENSION-Upper Face
Regular Cab 2WD (Except Pre Runner)

(Three-Dimensional Distance)

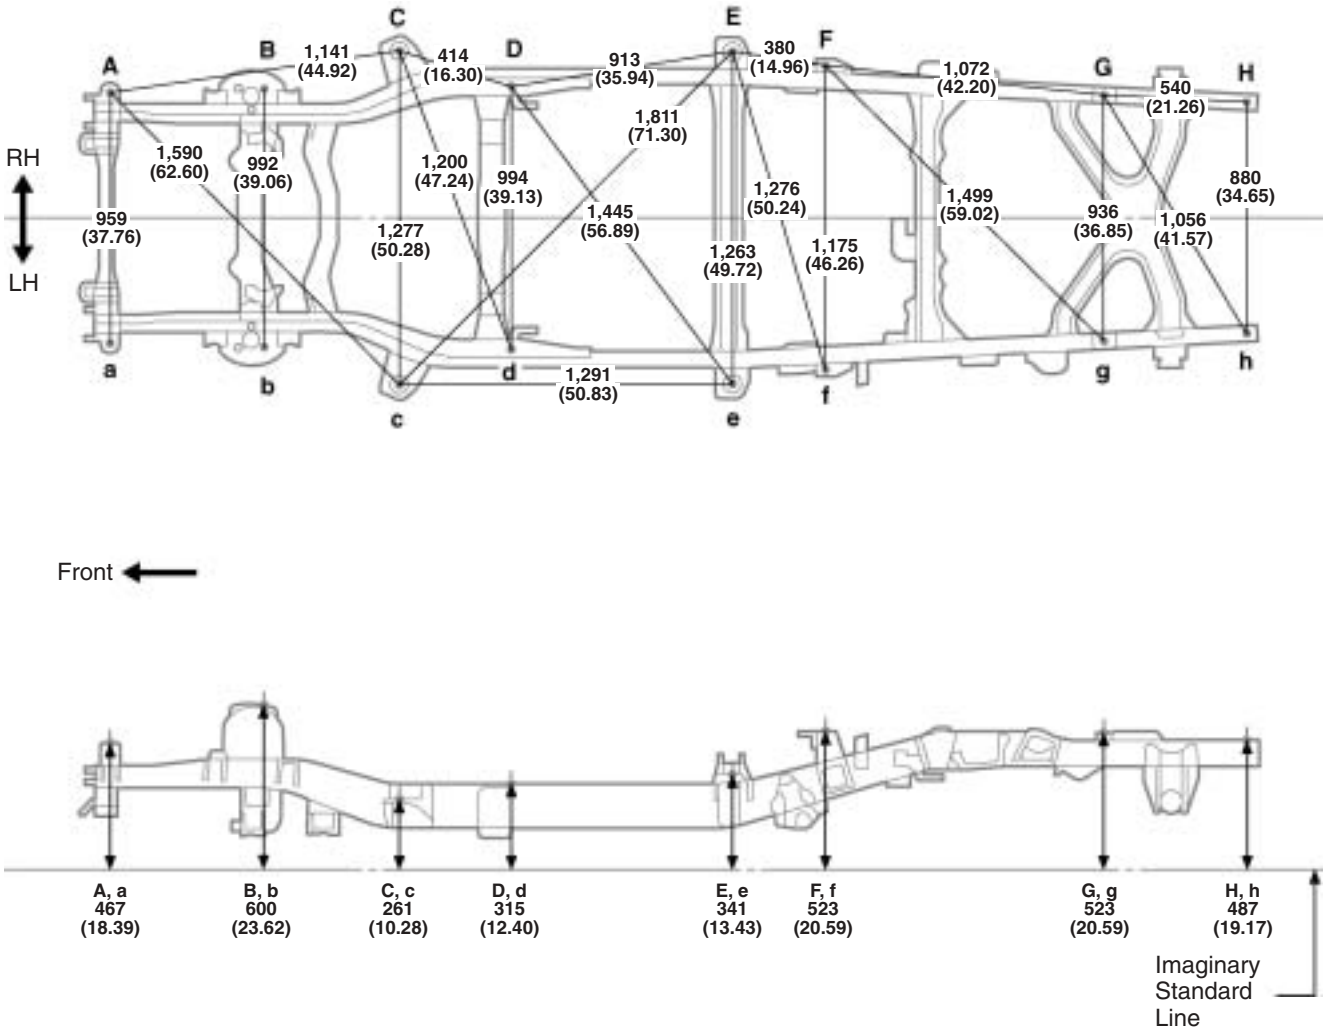


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Upper Face
Regular Cab 2WD (Except Pre Runner)

(Two-Dimensional Distance)

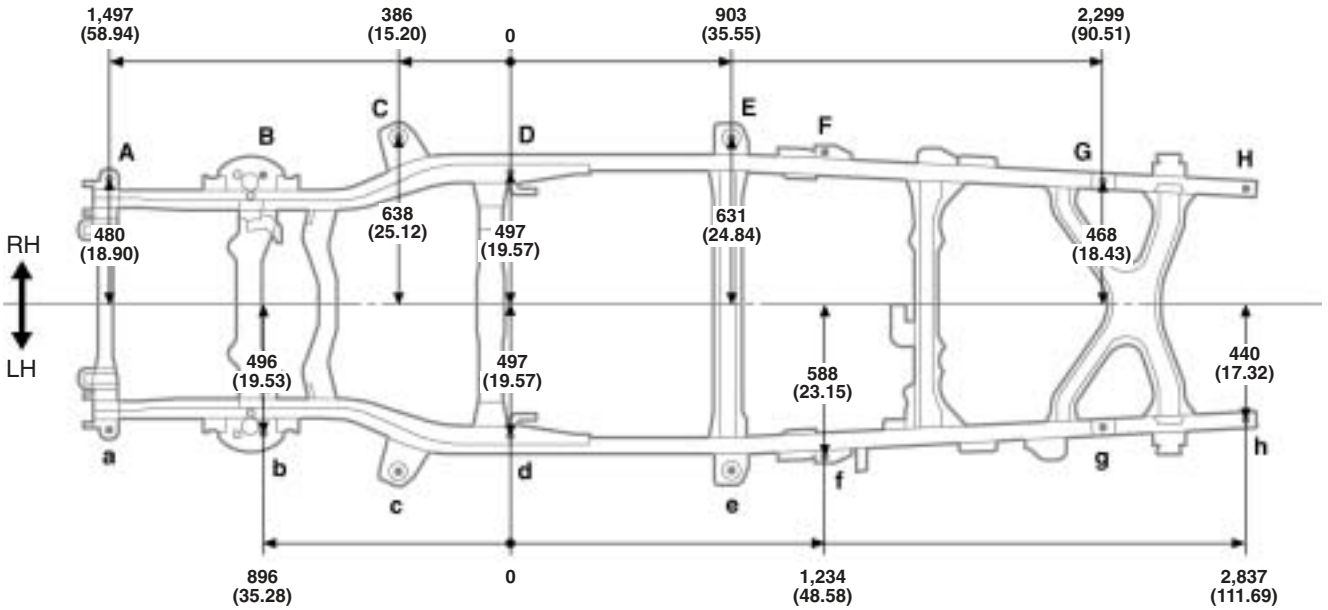

Front ←

Wheel Base	2,785 (109.65)

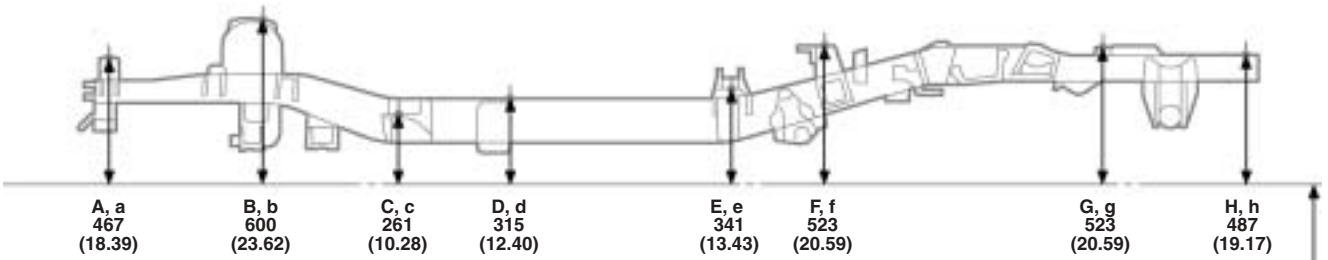


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Access Cab 2WD (Except Pre Runner)

(Three-Dimensional Distance)

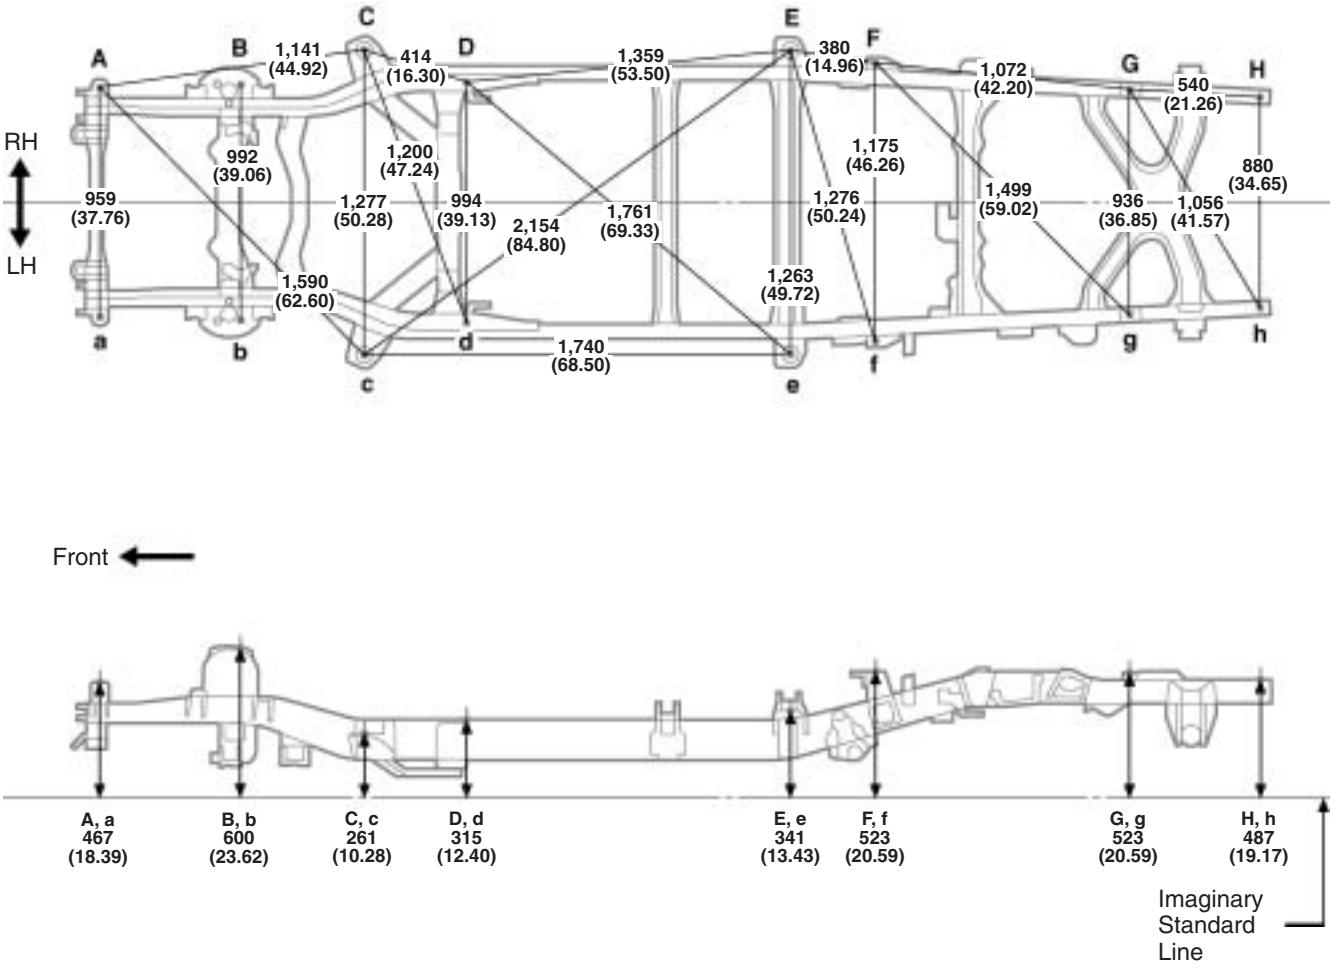


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Upper Face
Access Cab 2WD (Except Pre Runner)

(Two-Dimensional Distance)

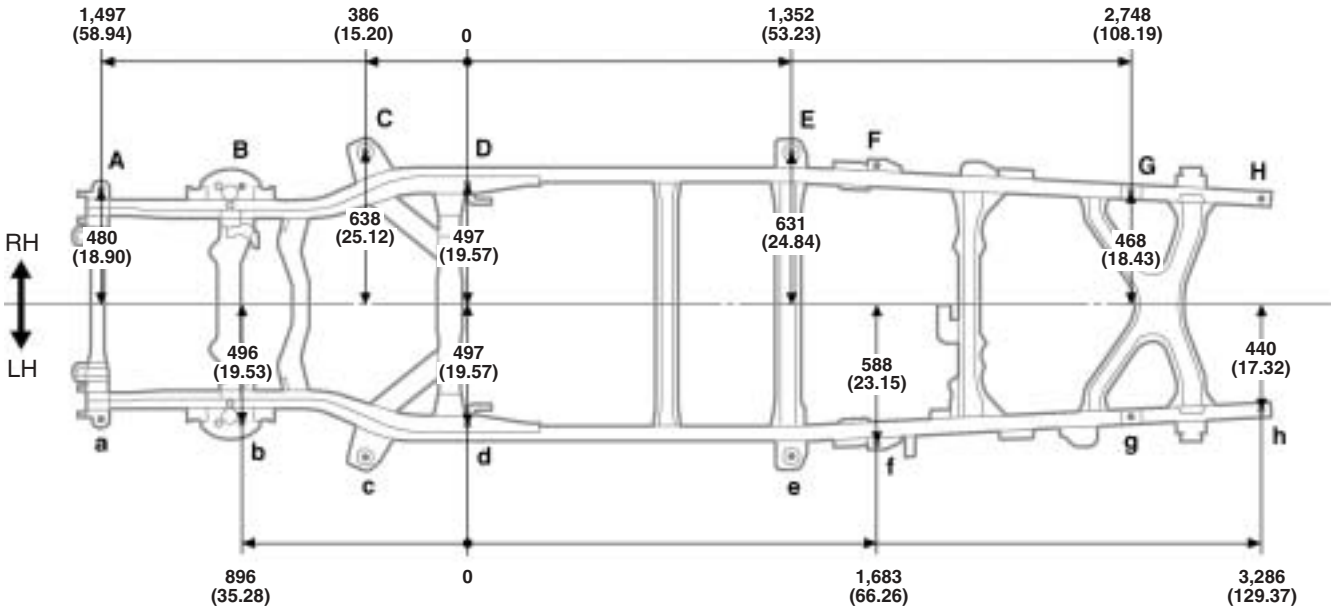

Front

Wheel Base	3,235 (127.36)

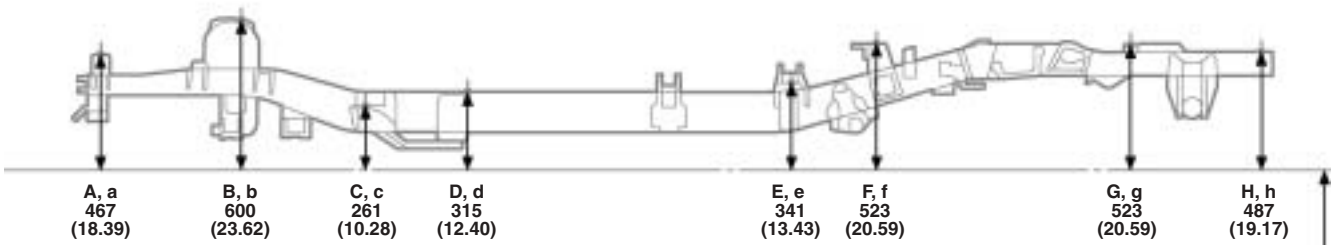


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Regular Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

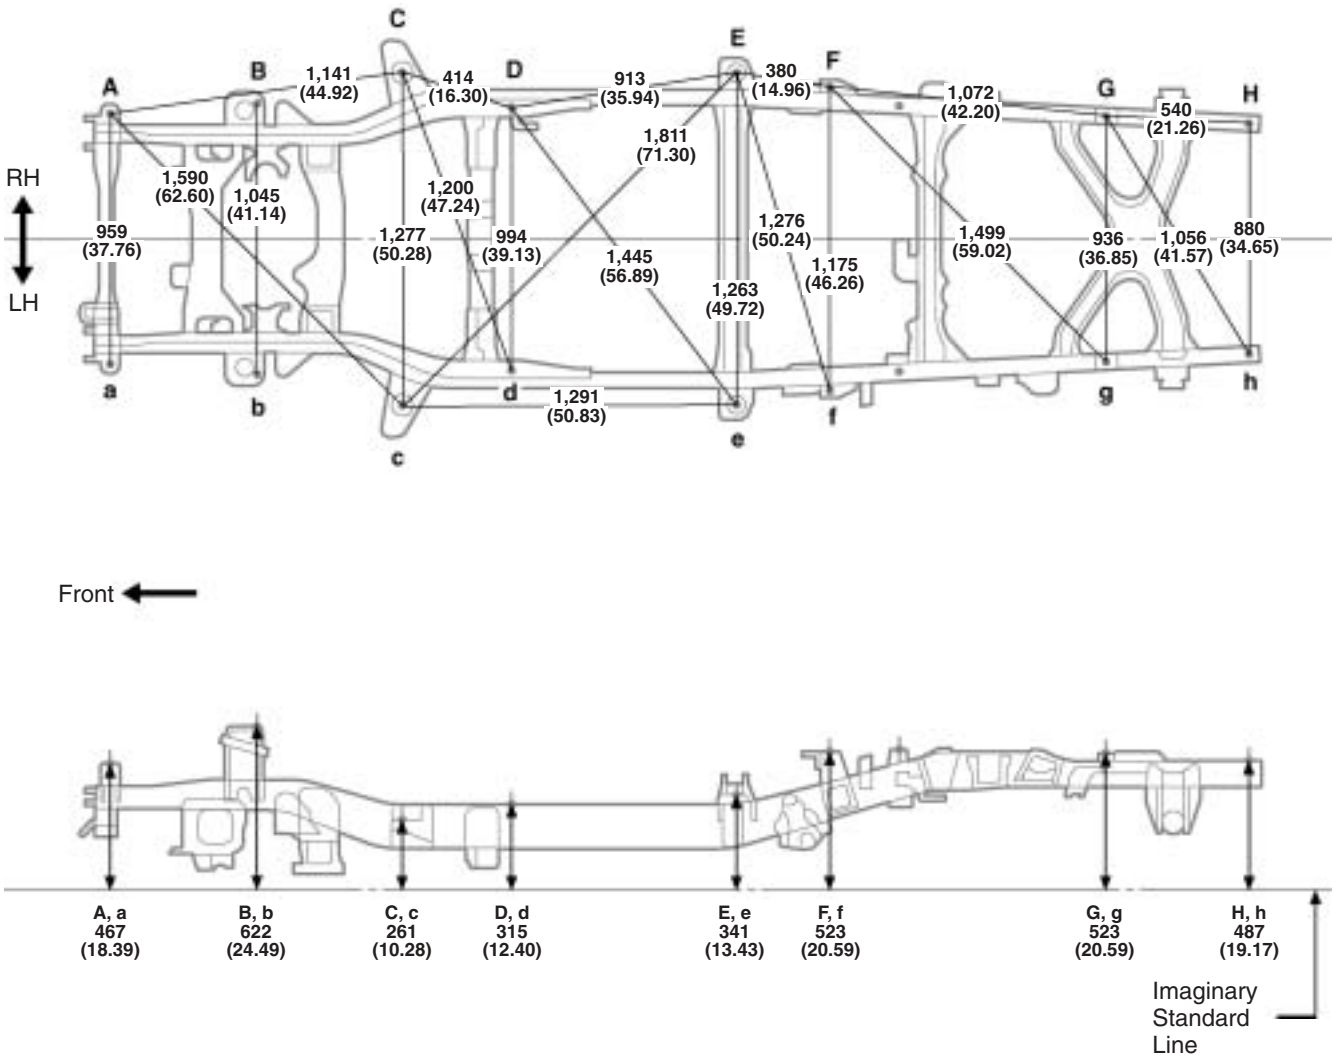


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Upper Face
Regular Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

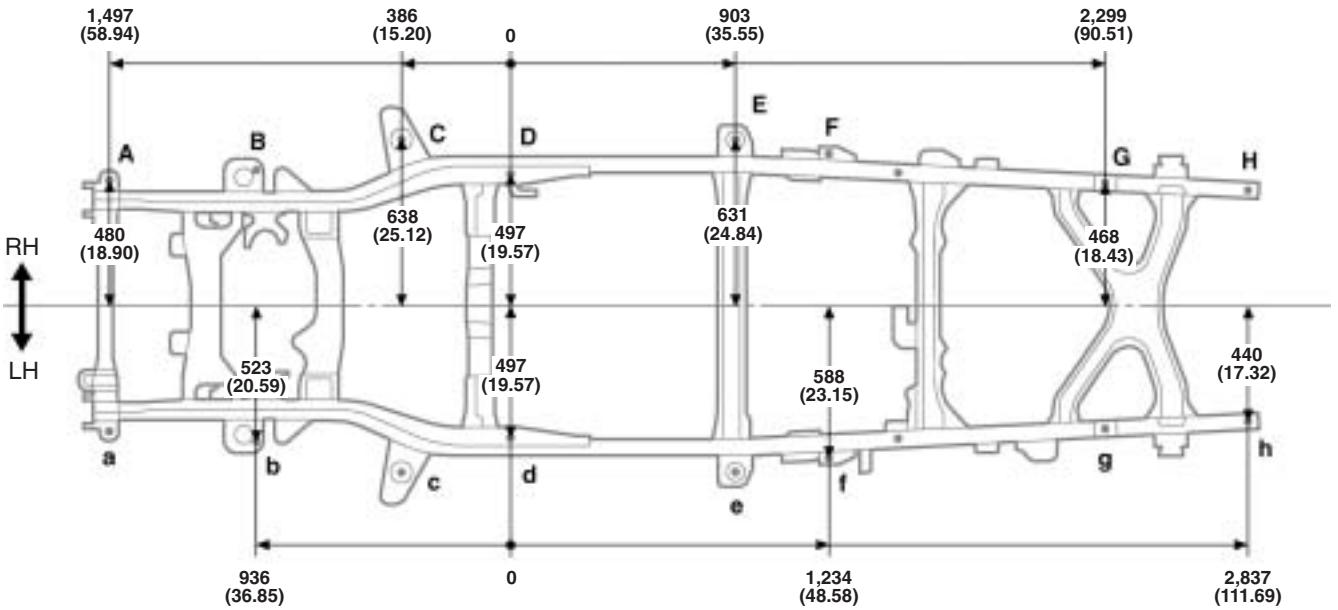

Front ←

Wheel Base	2,785 (109.65)

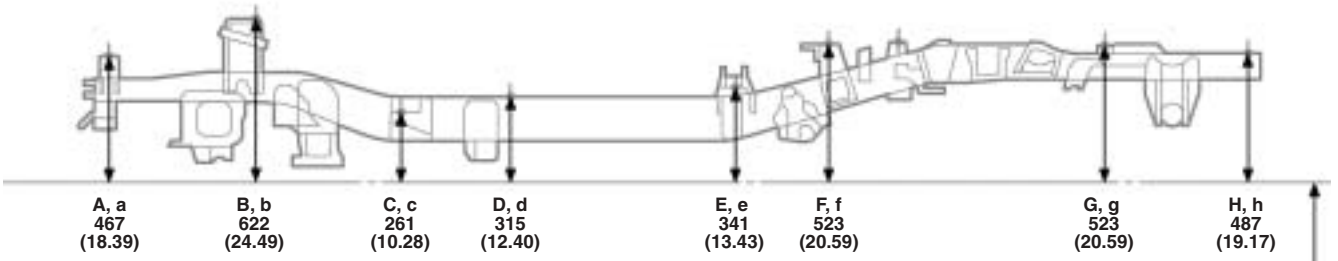


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Access Cab 4WD (Include Pre Runner)

(Three-Dimensional Distance)

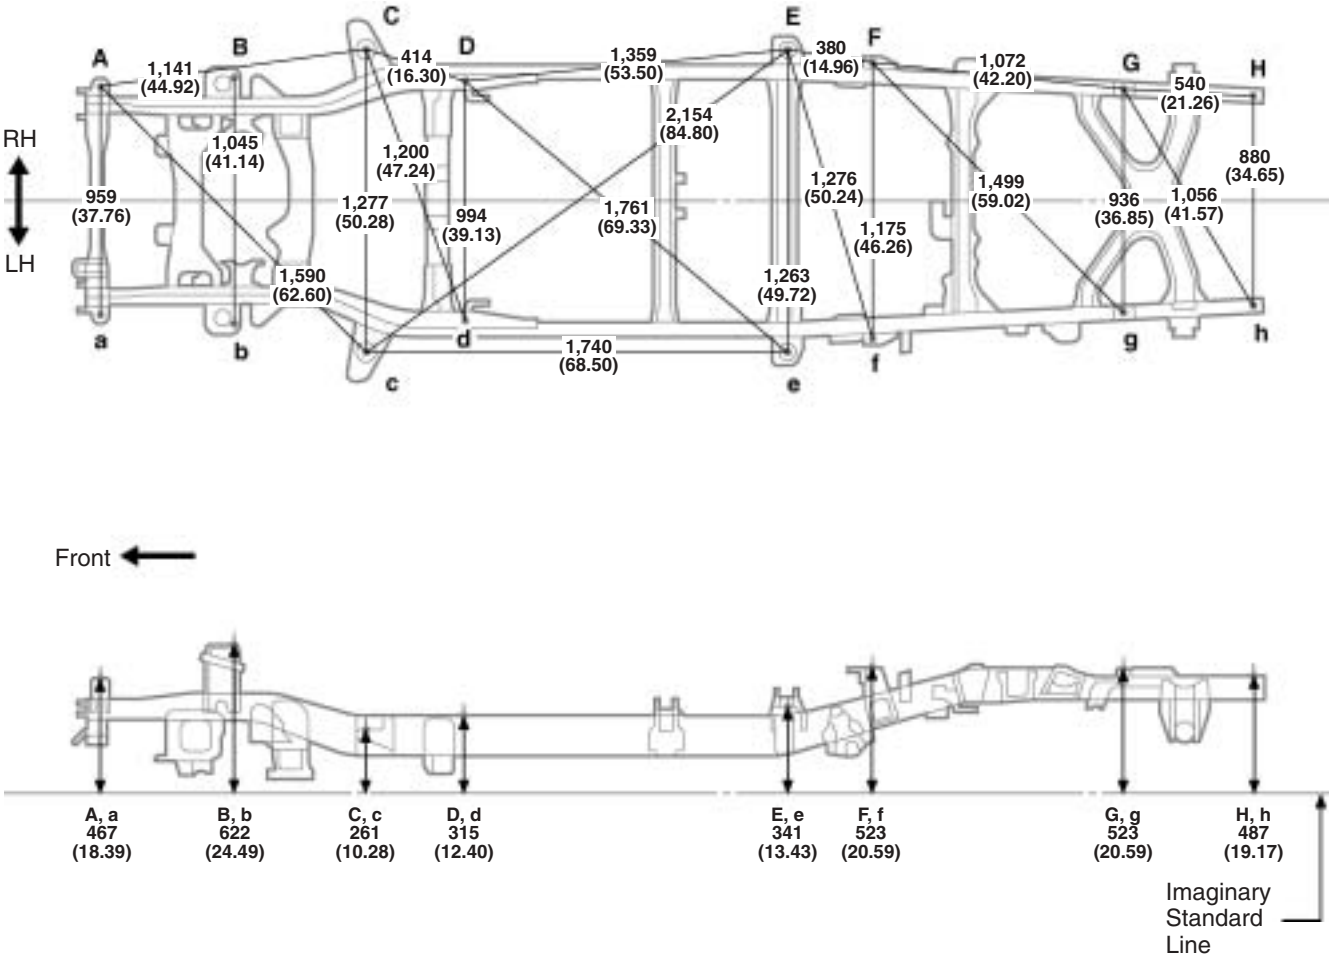


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Upper Face
Access Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

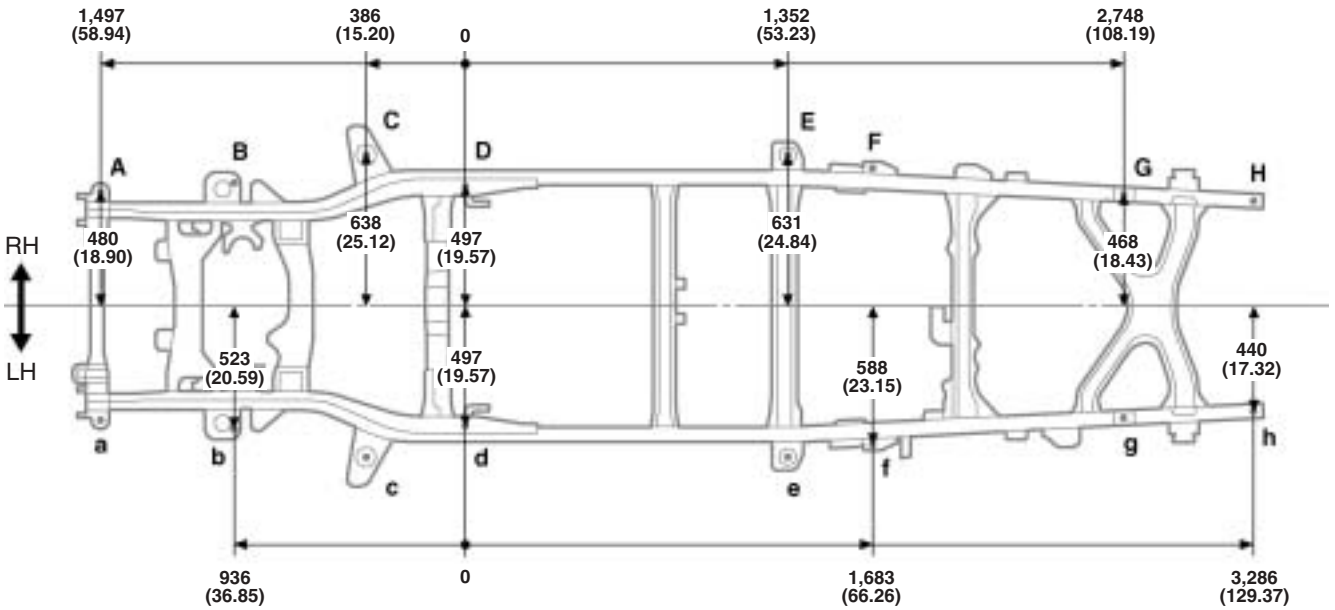

Front

Wheel Base	3,235 (127.36)

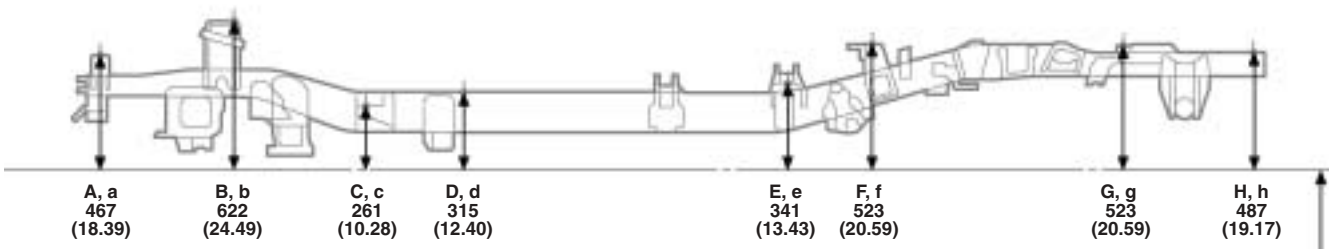


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Double Cab 4WD (Include Pre Runner)

(Three-Dimensional Distance)

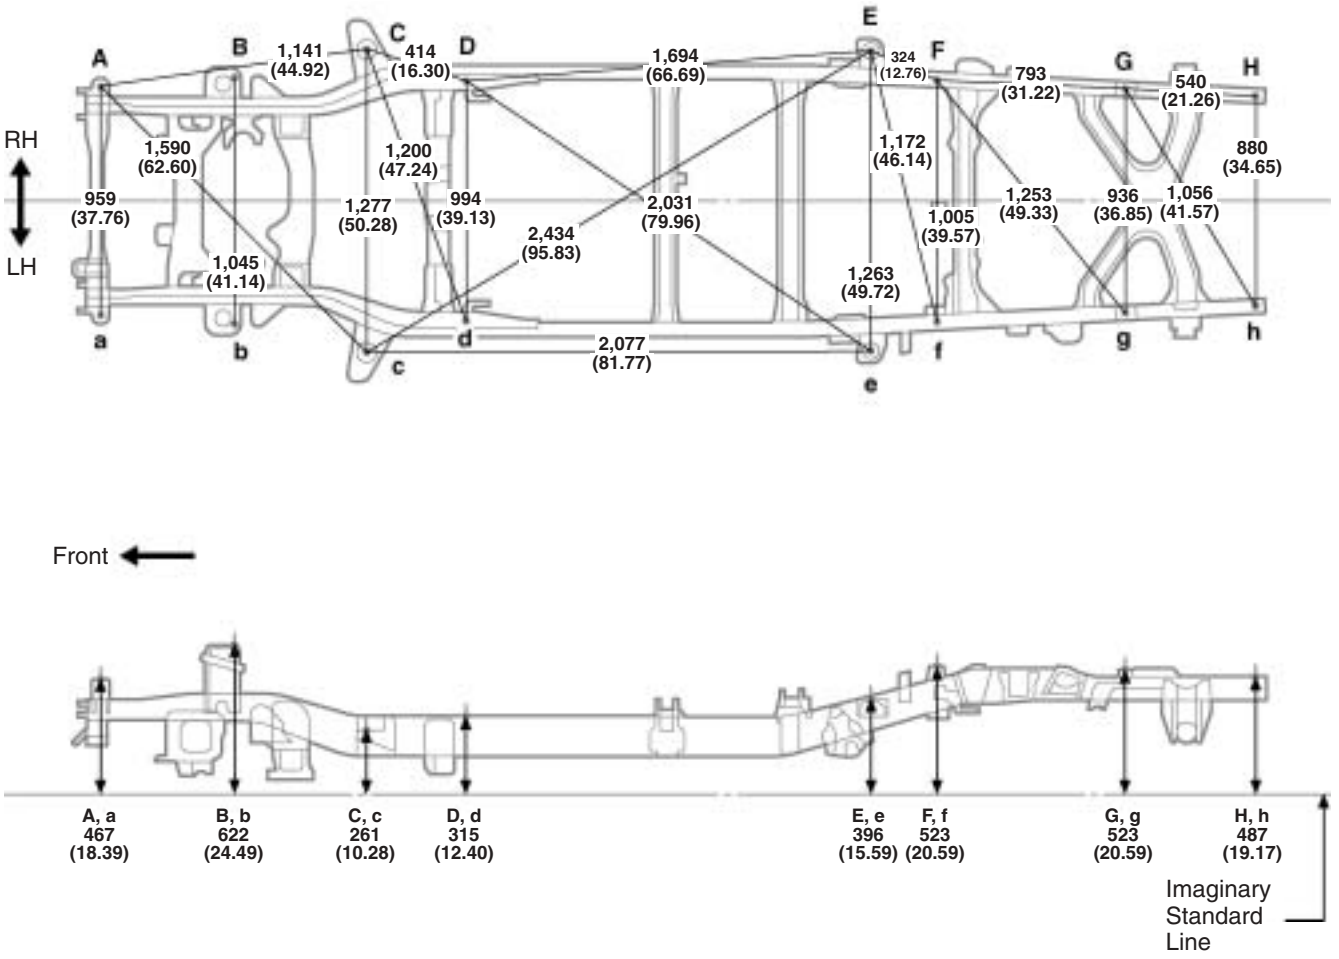


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Upper Face
Double Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

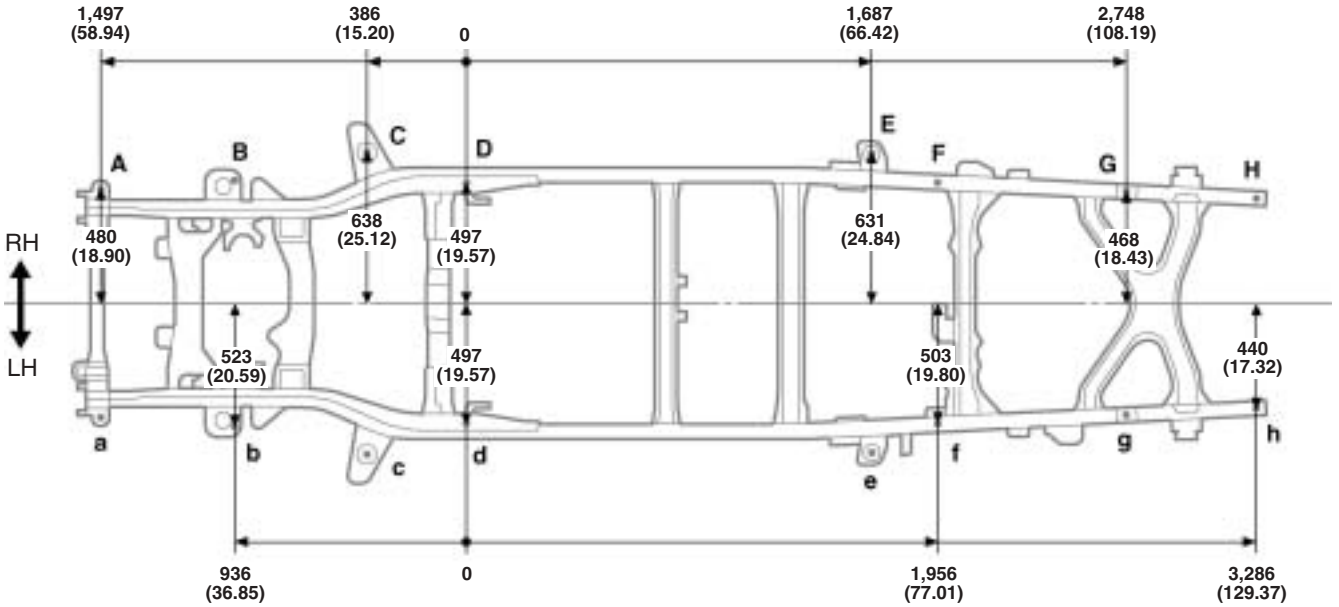

Front

Wheel Base	3,235 (127.36)

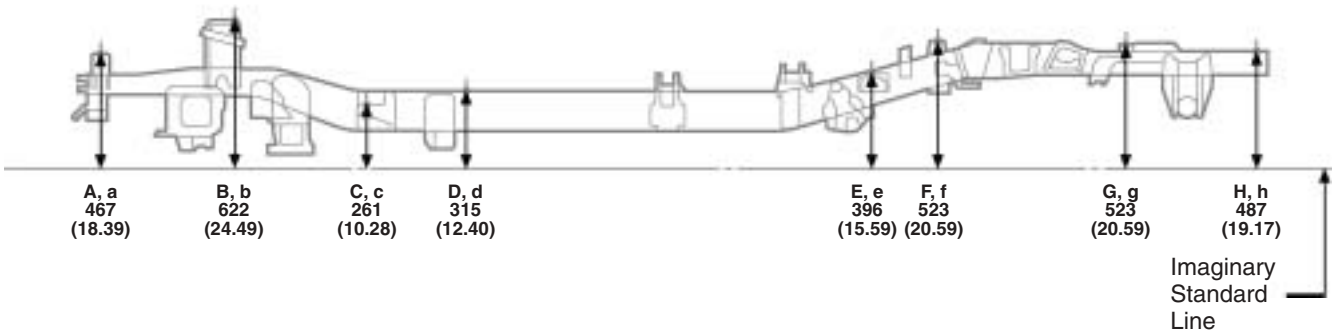


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Double Cab 4WD (Include Pre Runner): Long Deck

(Three-Dimensional Distance)

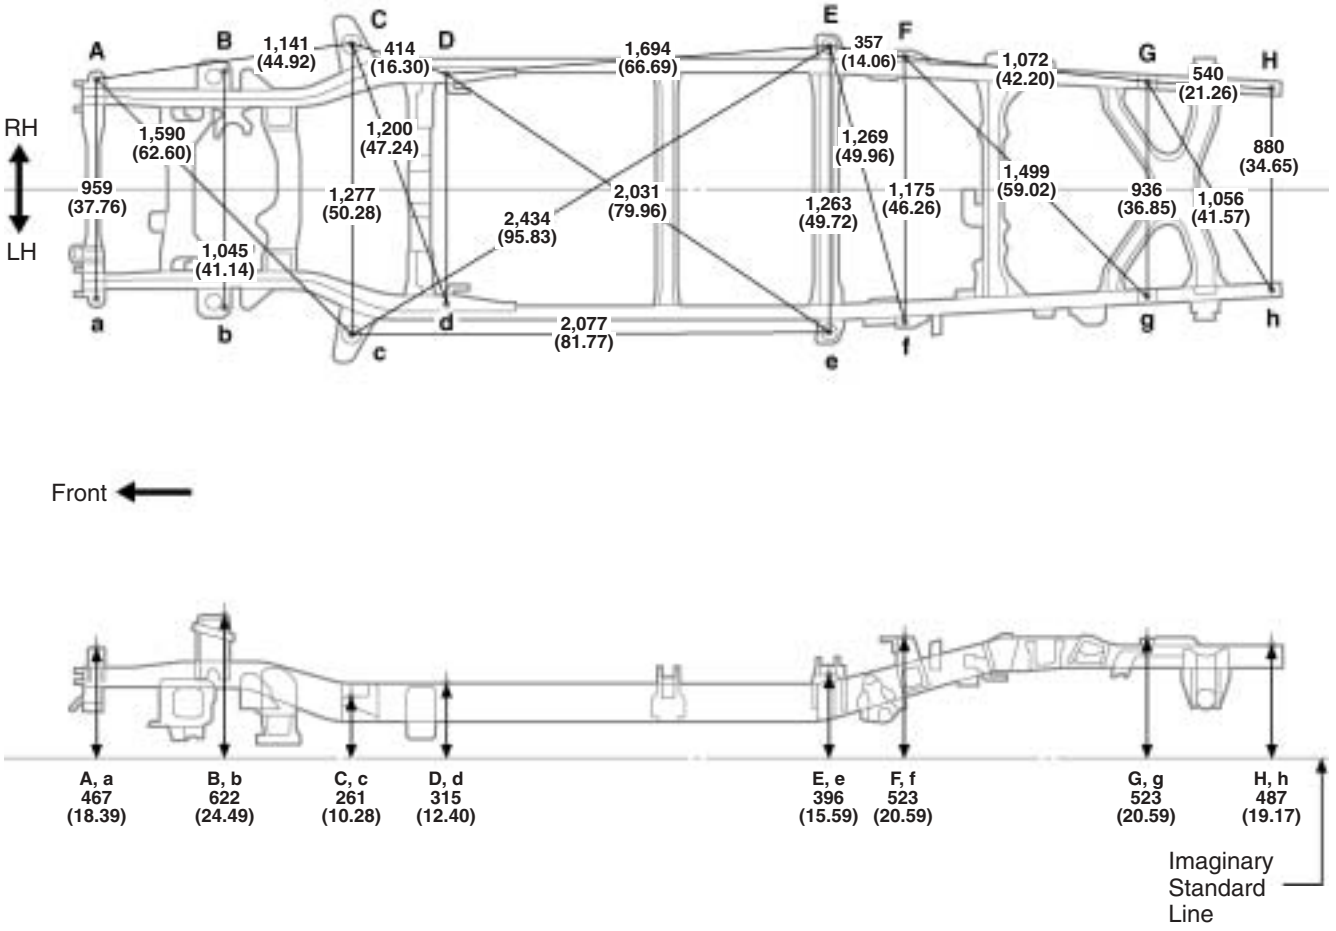


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Rear body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut

FRAME DIMENSION-Upper Face
Double Cab 4WD (Include Pre Runner): Long Deck

(Two-Dimensional Distance)

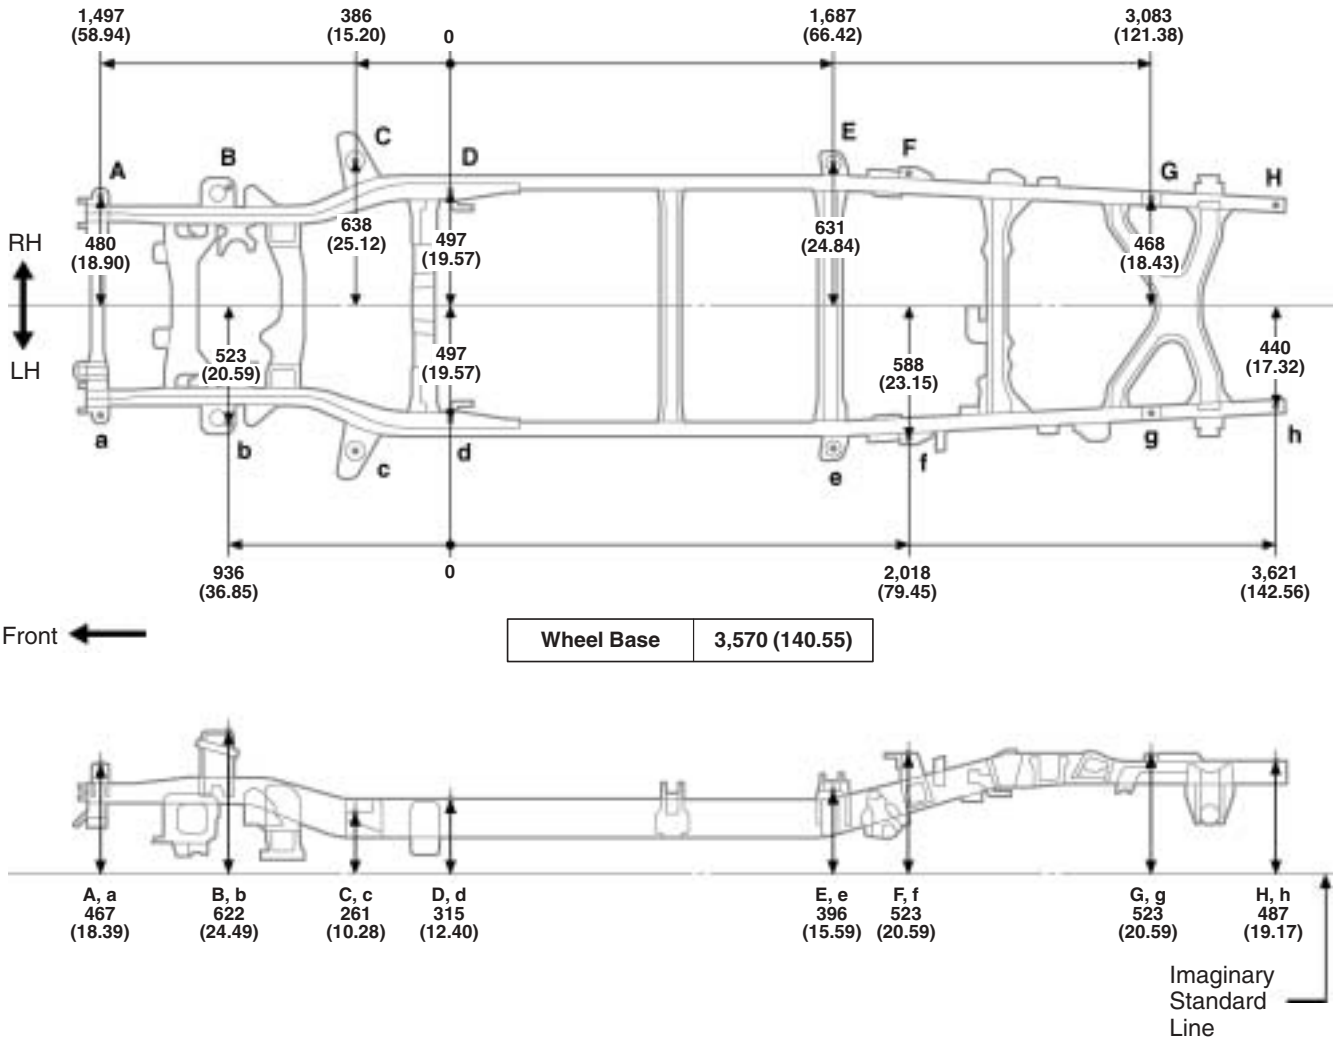


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	24 (0.94)	E, e	Body mounting hole	70 (2.76)
B, b	Shock absorber installation hole	12.2 (0.480)	F, f	Rear body mounting nut	12 (0.47) nut
C, c	Body mounting hole	70 (2.76)	G, g	Rear body mounting nut	12 (0.47) nut
D, d	Side rail inner channel satndard hole	16 × 16 (0.63 × 0.63)	H, h	Rear body mounting nut	12 (0.47) nut


FRAME DIMENSION-Lower Face
Regular Cab 2WD (Except Pre Runner)

(Three-Dimensional Distance)

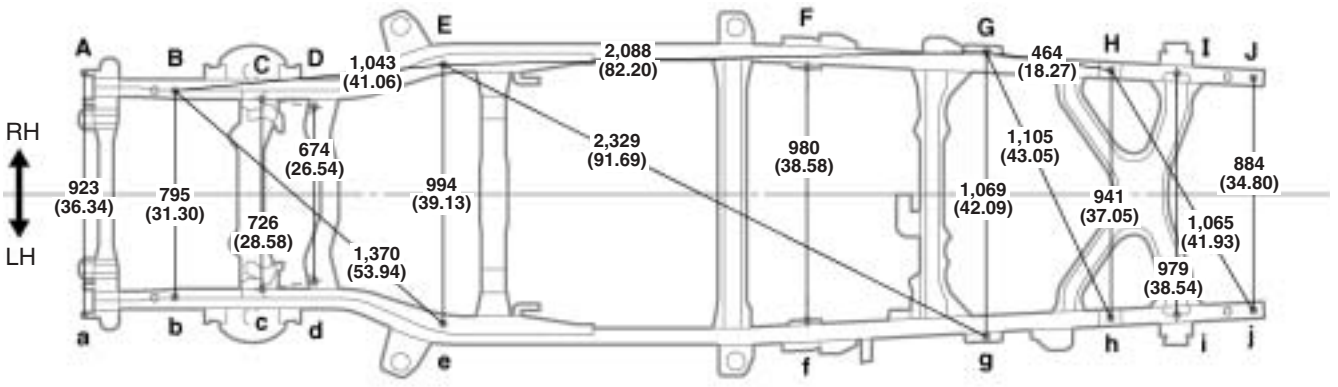

C-D or c-d	C-d or c-D	F-I or f-i	H-J or h-j
180 (7.09)	722 (28.43)	1,400 (55.12)	549 (21.61)

Front ←

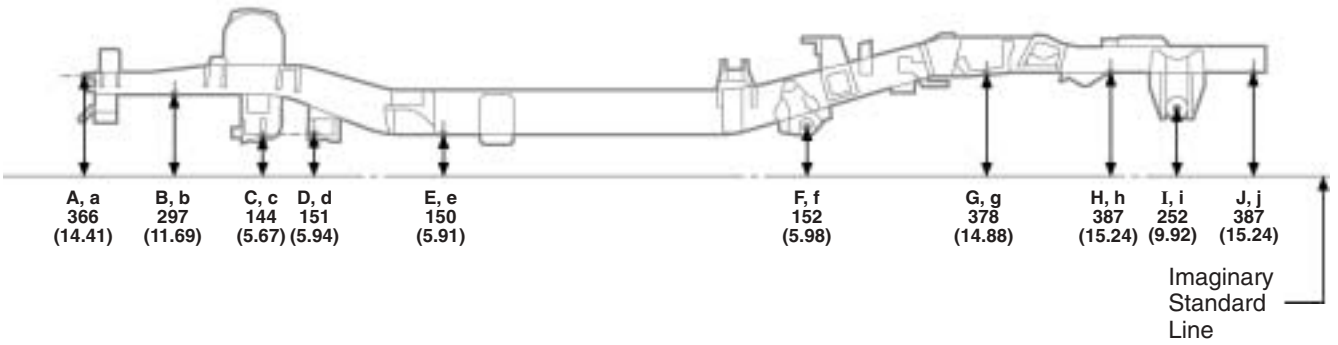


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Bound stopper standard hole	10 (0.39)
C, c	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	H, h	Rear stabilizer bracket installation nut	11 (0.43) nut
D, d	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	I, i	Rear spring rear hanger hole-inner	14.3 (0.563)
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	J, j	Towing hitch installation nut	12 (0.47) nut


FRAME DIMENSION-Lower Face
Regular Cab 2WD (Except Pre Runner)

(Two-Dimensional Distance)

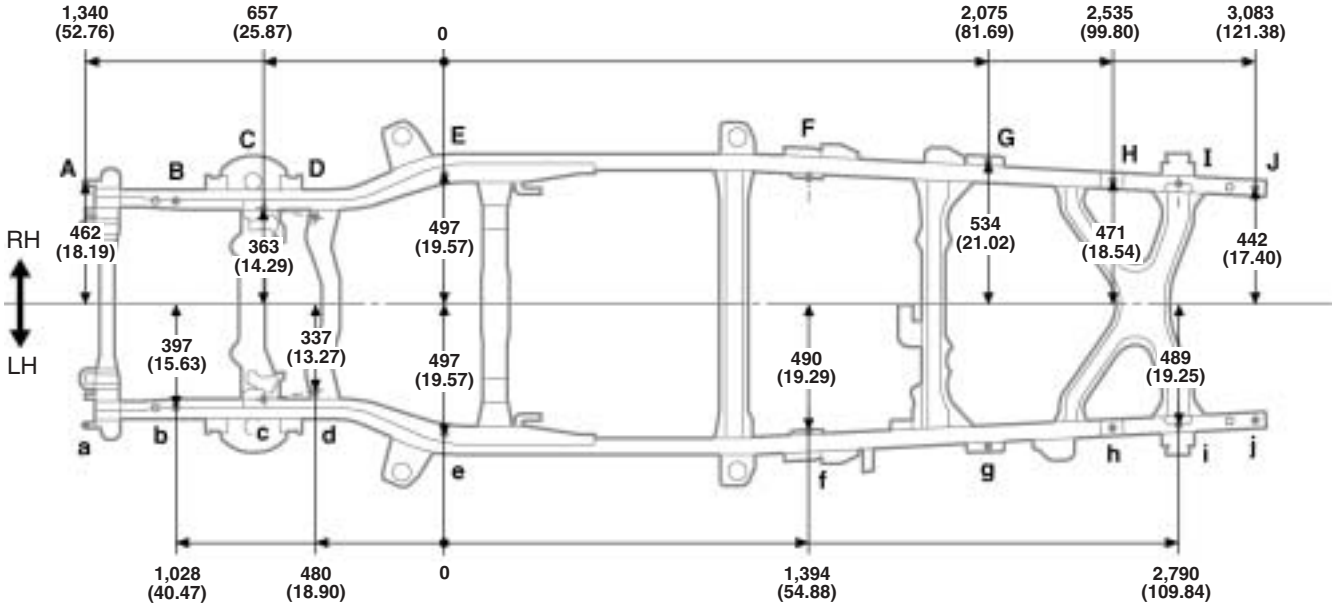

Front ←

Wheel Base	2,785 (109.65)

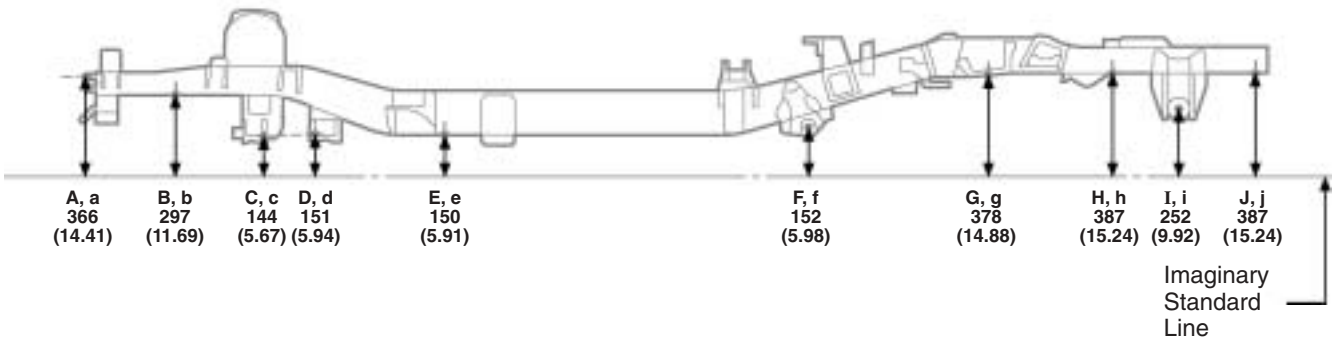


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Bound stopper standard hole	10 (0.39)
C, c	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	H, h	Rear stabilizer bracket installation nut	11 (0.43) nut
D, d	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	I, i	Rear spring rear hanger hole-inner	14.3 (0.563)
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	J, j	Towing hitch installation nut	12 (0.47) nut


FRAME DIMENSION-Lower Face
Access Cab 2WD (Except Pre Runner)

(Three-Dimensional Distance)

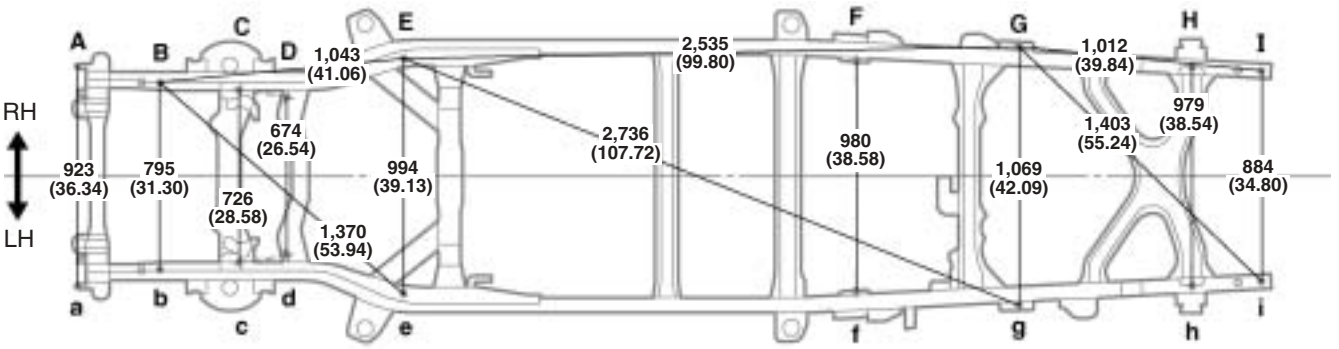

C-D or c-d	C-d or c-D	F-H or f-h
180 (7.09)	722 (28.43)	1,400 (55.12)

Front ←

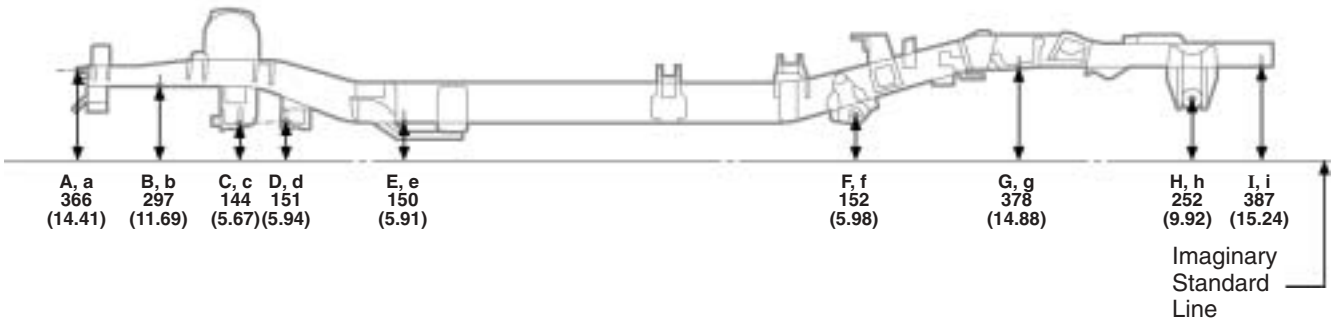


mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Bound stopper standard hole	10 (0.39)
C, c	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—

FRAME DIMENSION-Lower Face
Access Cab 2WD (Except Pre Runner)

(Two-Dimensional Distance)

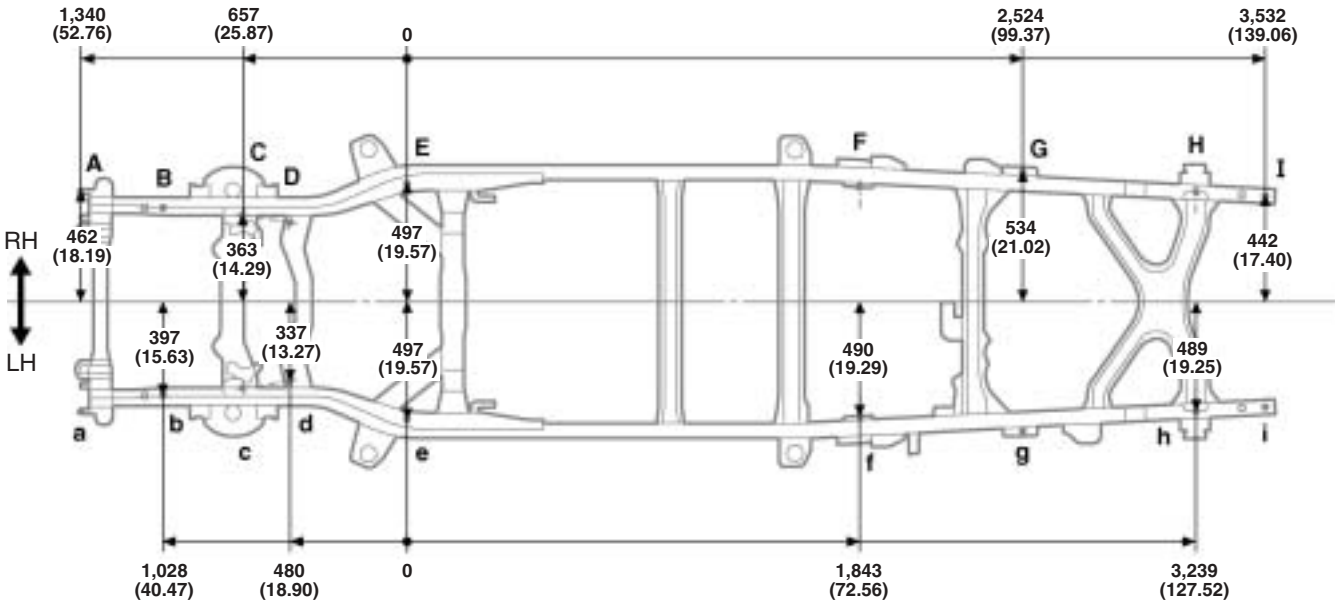

Wheel Base	3,235 (127.36)

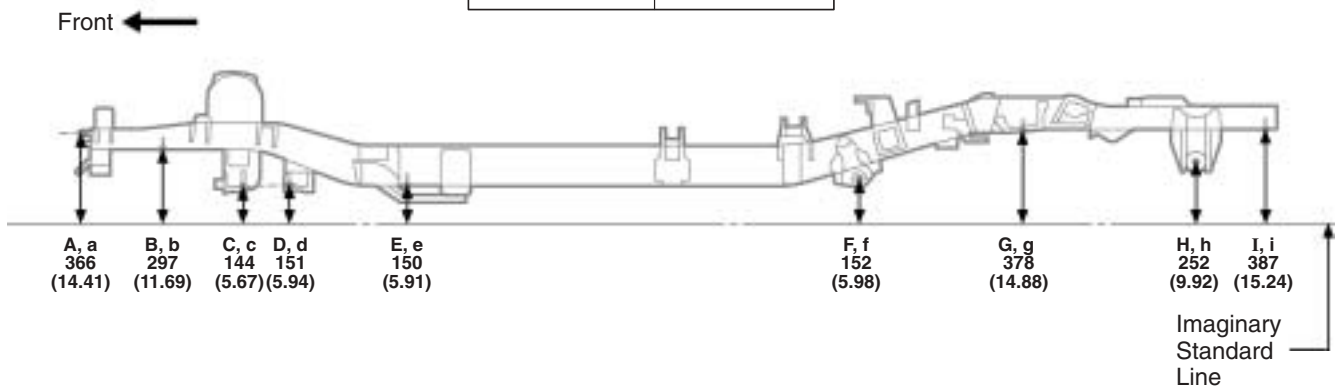


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Bound stopper standard hole	10 (0.39)
C, c	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	16.5 × 36.5 (0.650 × 1.437)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Regular Cab 4WD (include Pre Runner)

(Three-Dimensional Distance)

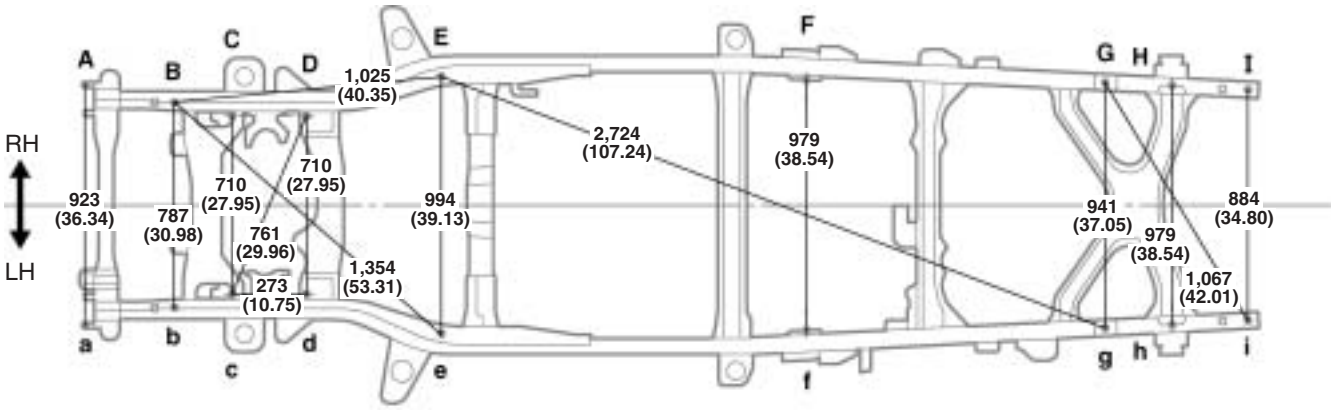

E-G or e-g	F-H or f-h	G-I or g-i
2,546 (100.24)	1,397 (55.00)	549 (21.61)

Front ←

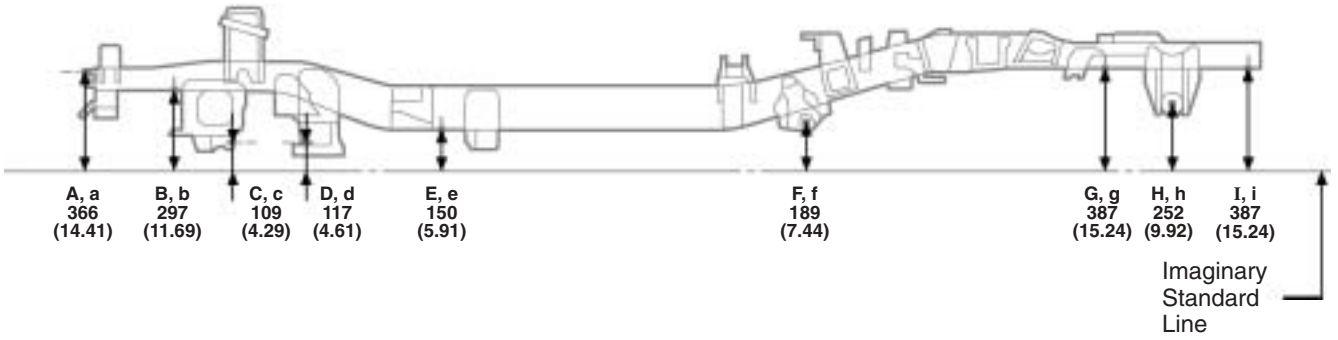


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 ×38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Regular Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

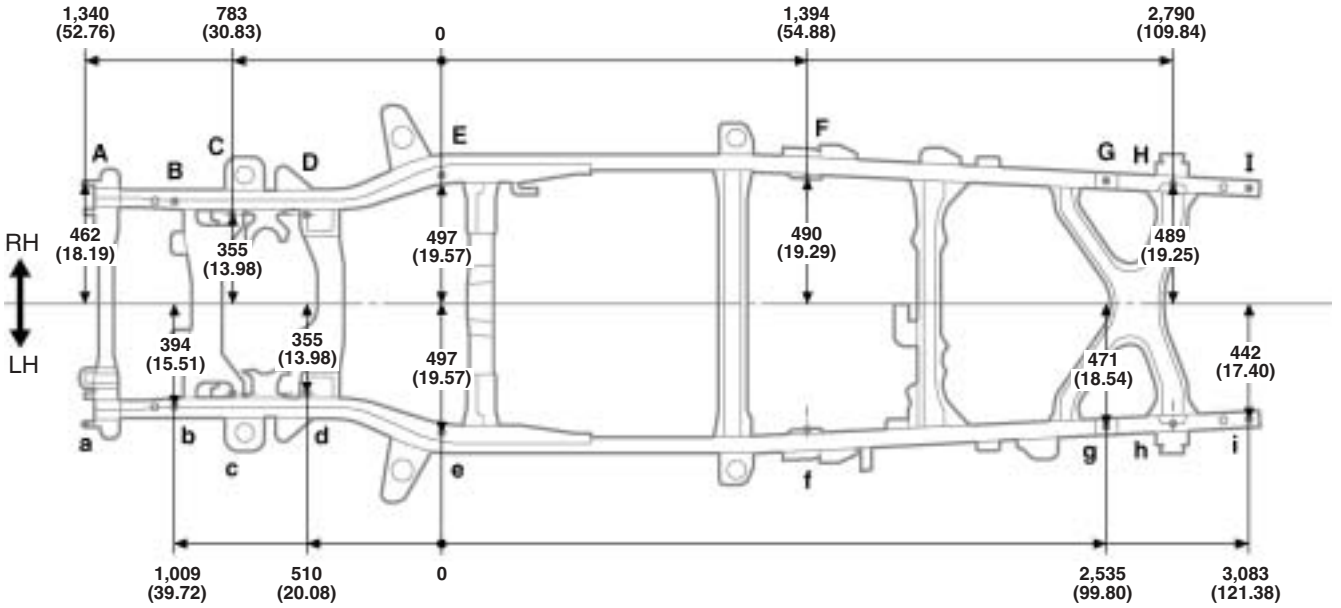

Front

Wheel Base	2,785 (109.65)

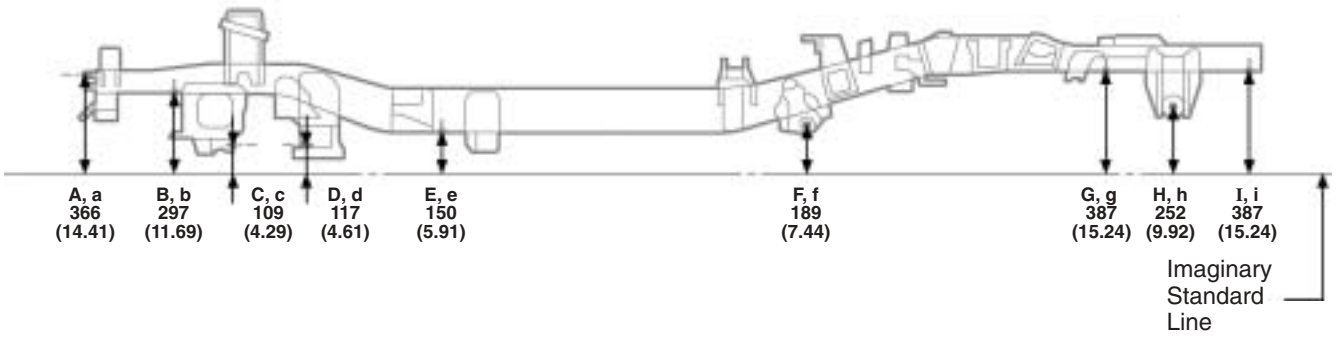


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Access Cab 4WD (Include Pre Runner)

(Three-Dimensional Distance)

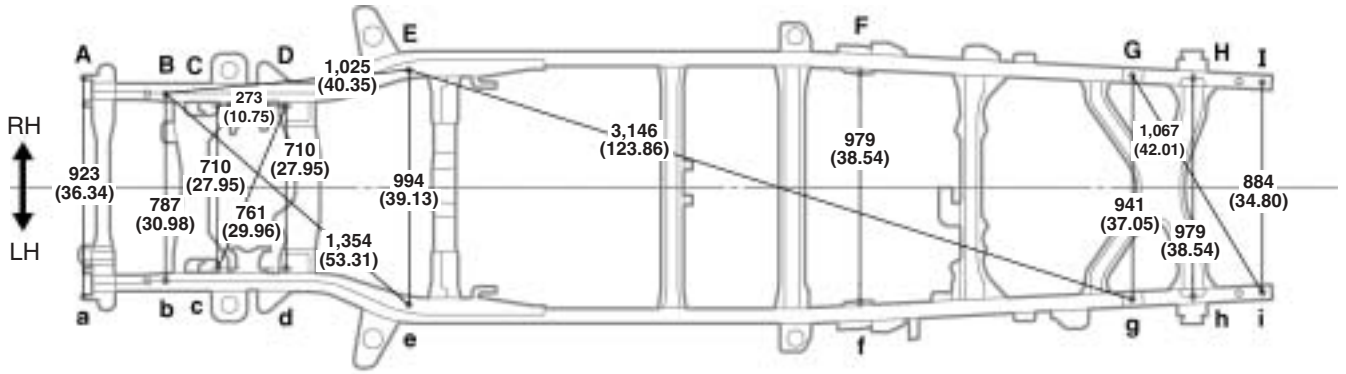

E-G or e-g	F-H or f-h	G-I or g-i
2,993 (117.83)	1,397 (55.00)	549 (21.61)

Front ←

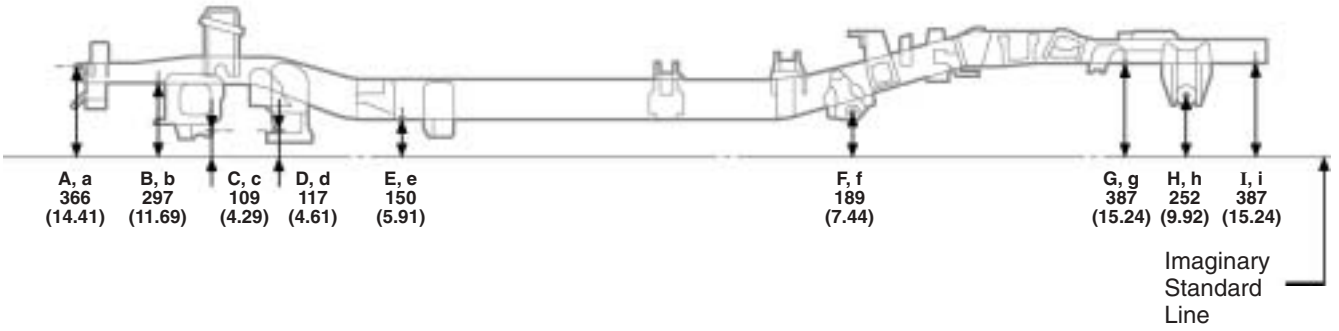


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 ×38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Access Cab 4WD (include Pre Runner)

(Two-Dimensional Distance)

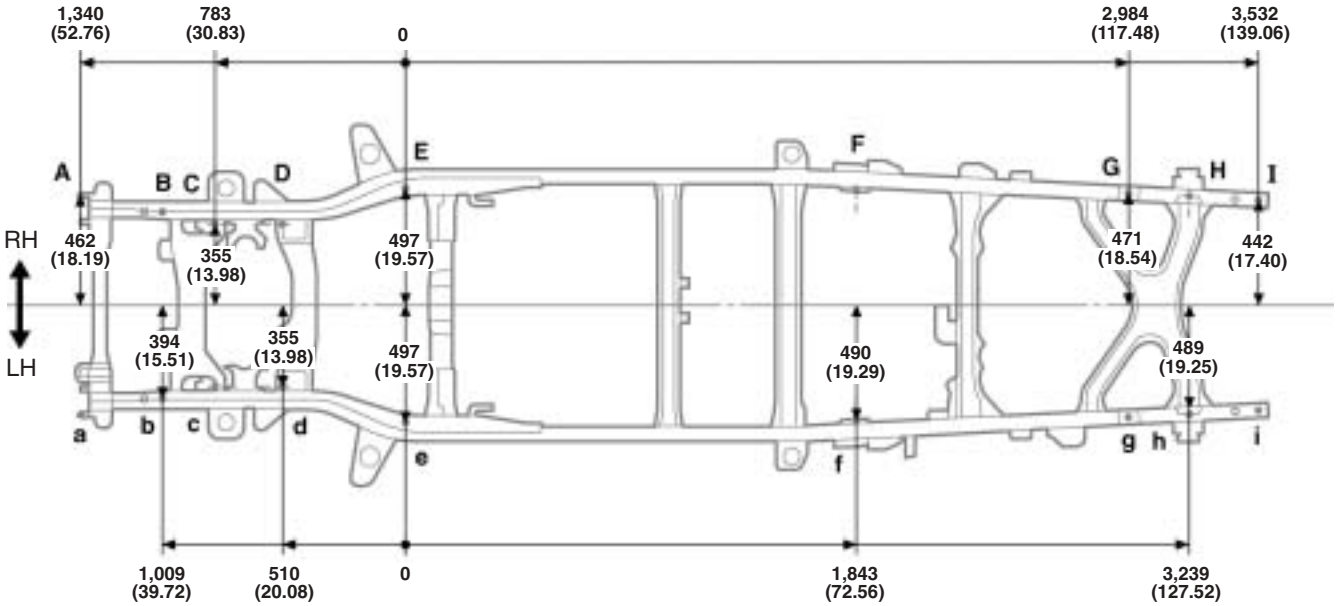

Front ←

Wheel Base	3,235 (127.36)

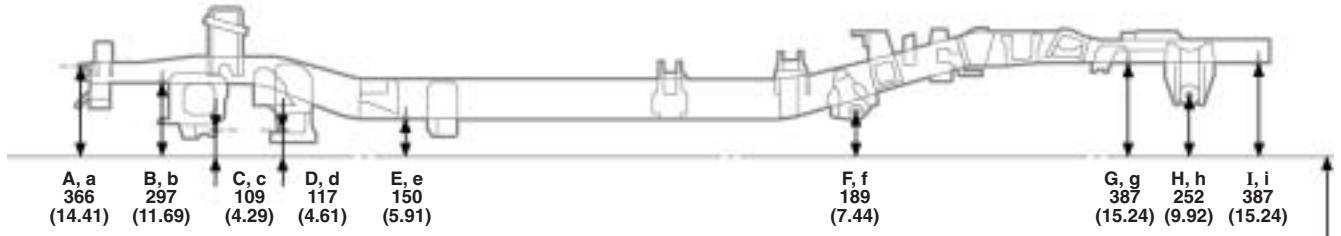


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Double Cab 4WD (Include Pre Runner)

(Three-Dimensional Distance)

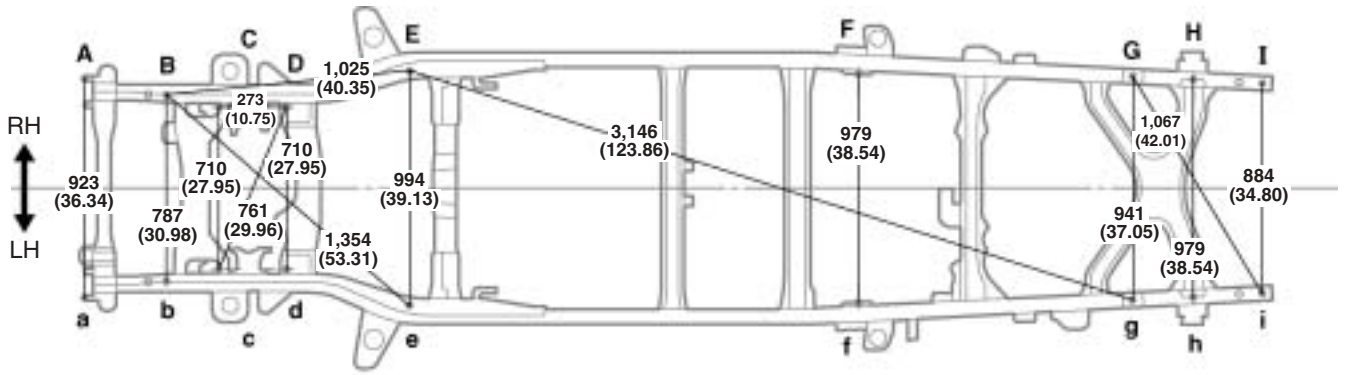

E-G or e-g	F-H or f-h	G-I or g-i
2,993 (117.83)	1,397 (55.00)	549 (21.61)

Front ←

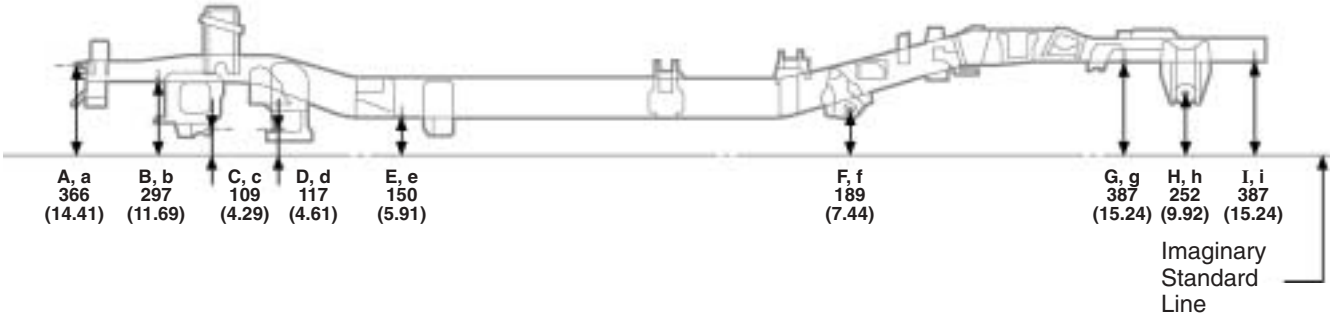


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 ×38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Double Cab 4WD (Include Pre Runner)

(Two-Dimensional Distance)

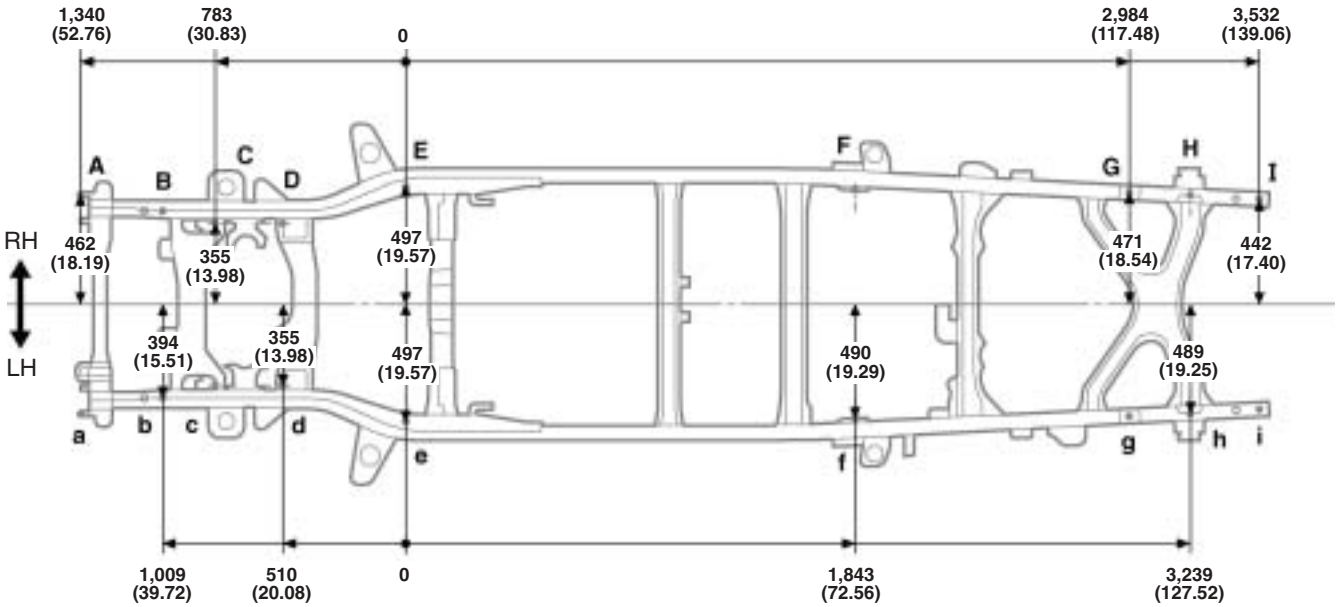

Front ←

Wheel Base	3,235 (127.36)

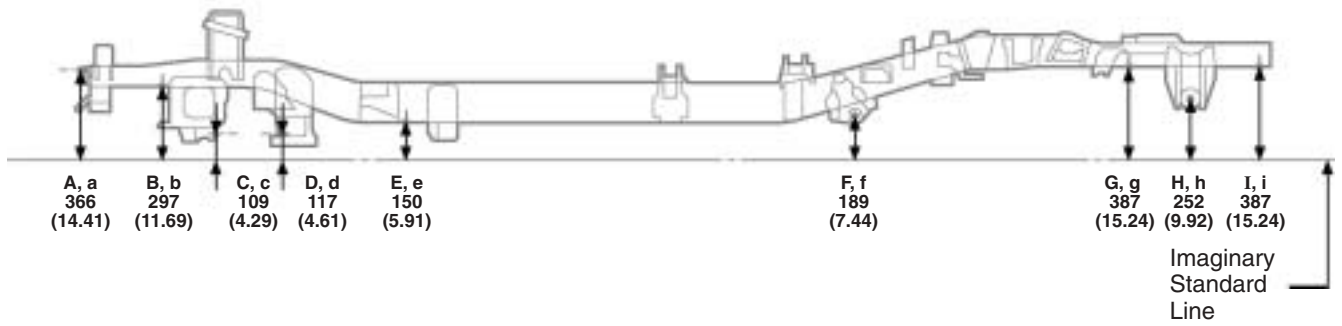


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—


FRAME DIMENSION-Lower Face
Double Cab 4WD (Include Pre Runner): Long Deck

(Three-Dimensional Distance)

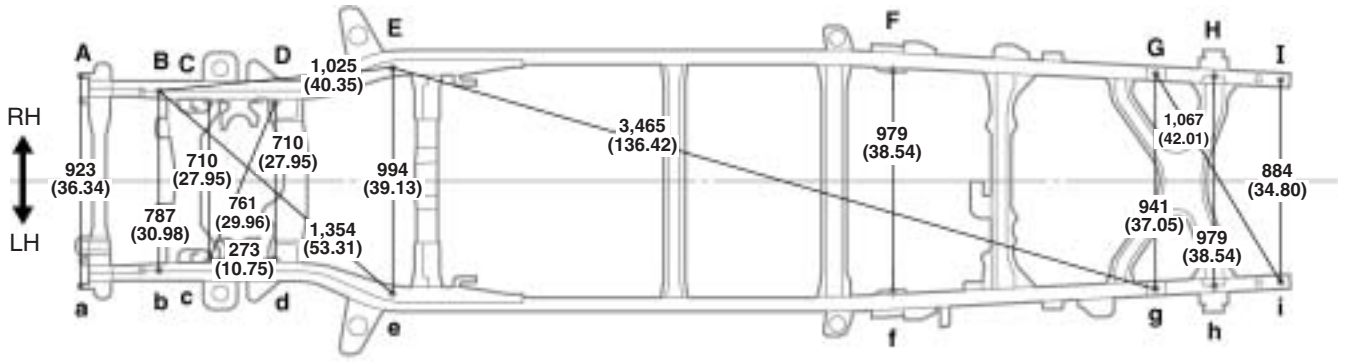

E-G or e-g	F-H or f-h	G-I or g-i
3,327 (130.98)	1,397 (55.00)	549 (21.61)

Front ←

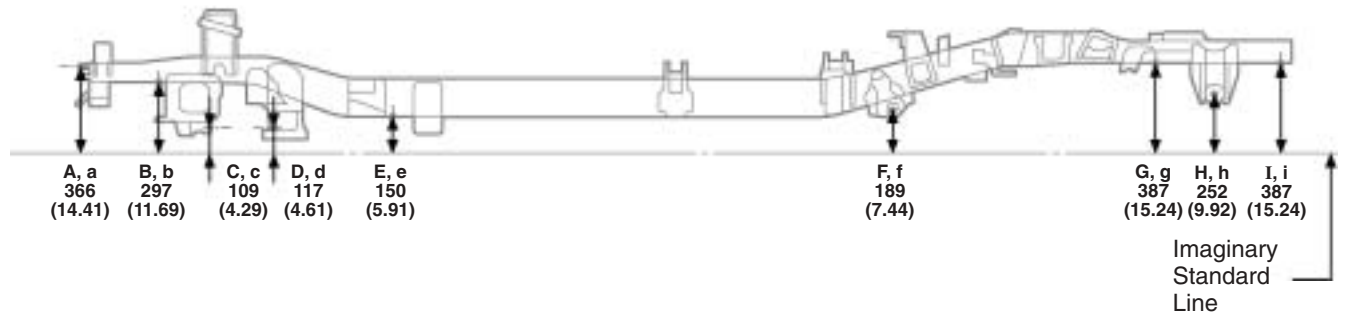


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 ×38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—

FRAME DIMENSION-Lower Face
Double Cab 4WD (Include Pre Runner): Long Deck

(Two-Dimensional Distance)

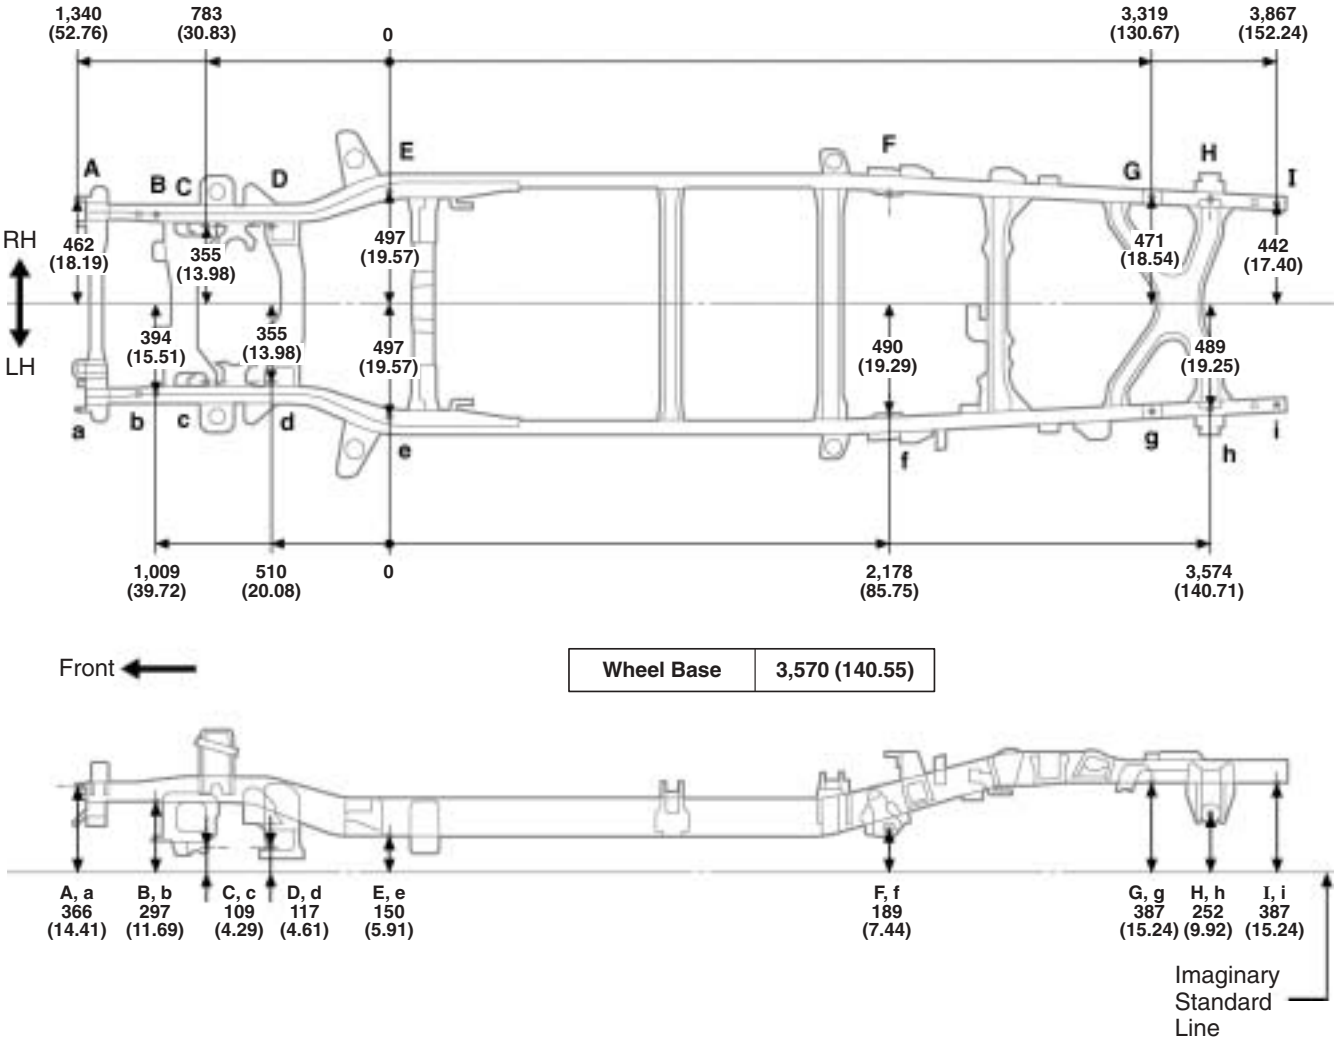

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Rear spring front hanger hole-inner	14.3 (0.563)
B, b	Front stabilizer bracket installation nut	8 (0.31) nut	G, g	Rear stabilizer bracket installation nut	11 (0.43) nut
C, c	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	H, h	Rear spring rear hanger hole-inner	14.3 (0.563)
D, d	Suspension lower arm installation hole	20 × 38 (0.79 × 1.50)	I, i	Towing hitch installation nut	12 (0.47) nut
E, e	Side rail inner channel standard hole	16 × 16 (0.63 × 0.63)	—	—	—