
BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

HINT:
1) Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2) Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3) Wipe off the anti-rust agent immediately with a rag soaked in silicone remover, if accidently applied to other areas.

[Regular Cab]




a – a

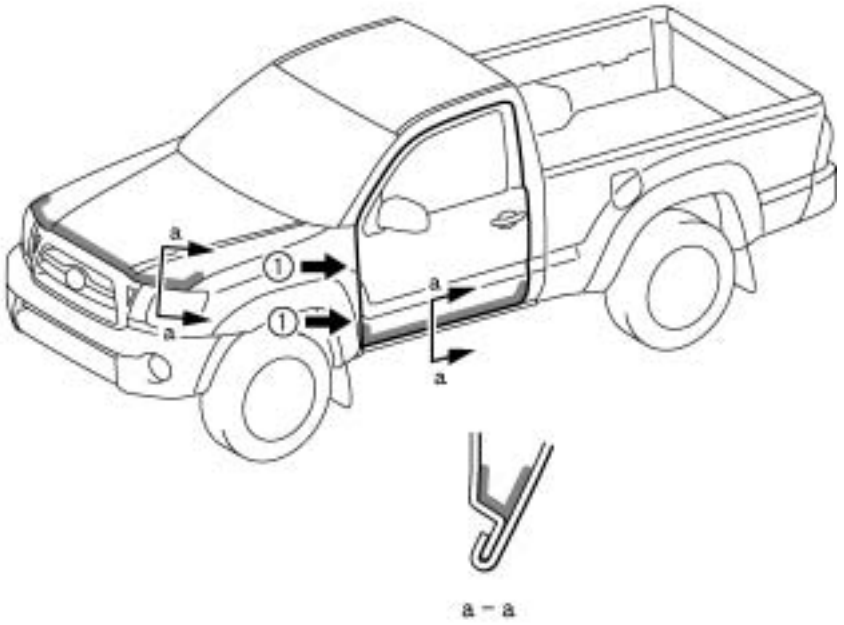

F21413

[Access Cab]

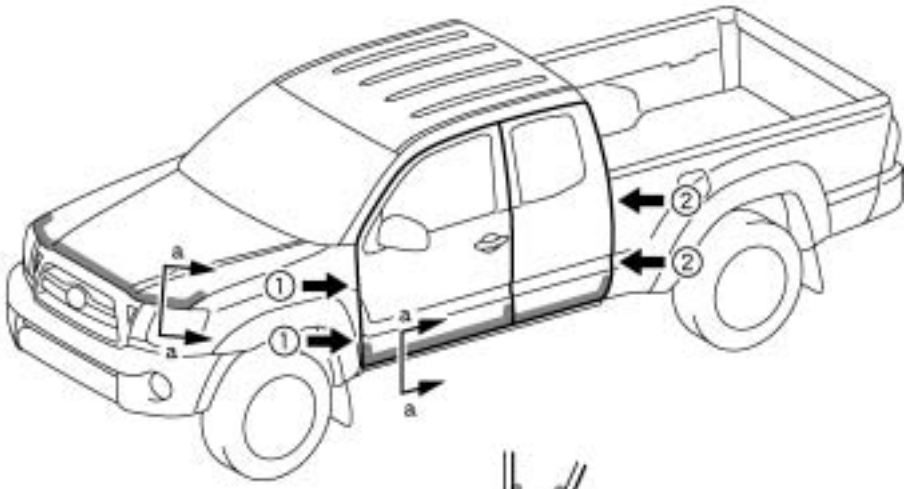



a – a




①



②

F21414

[Double Cab]

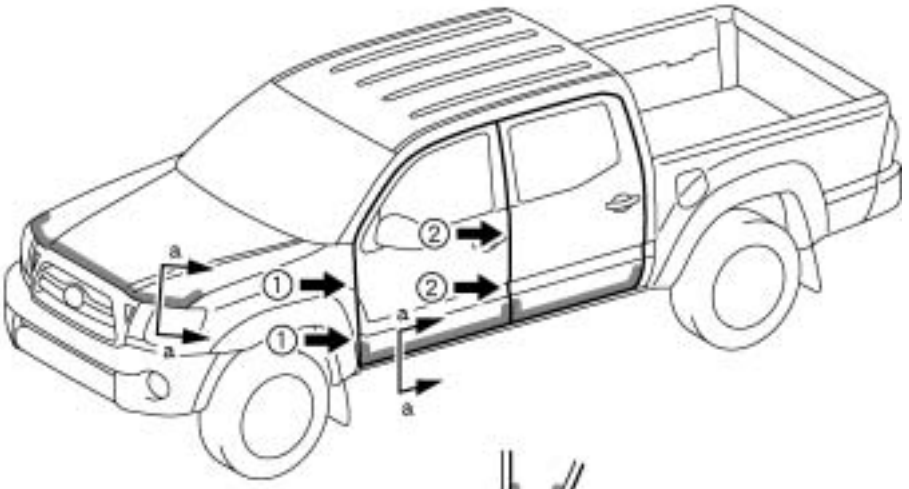



a – a




①



②

F21415

[ALL]

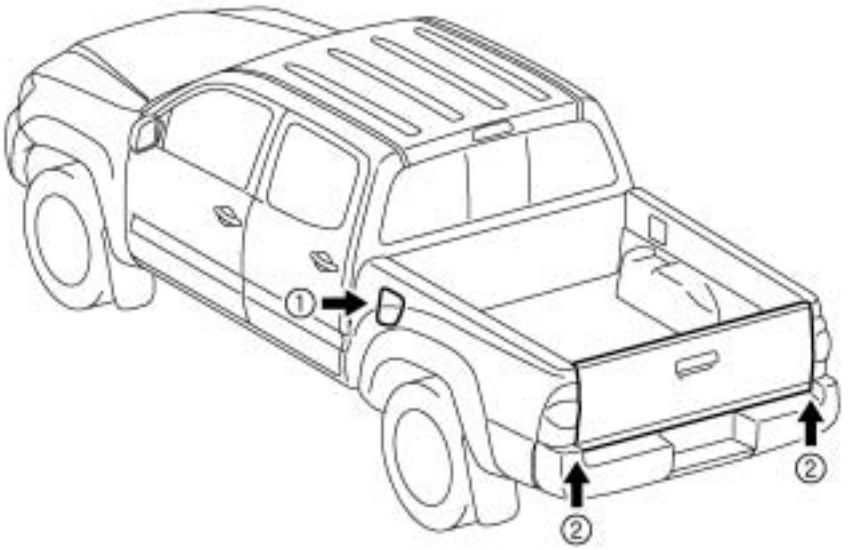





F21416