
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three - Dimensional Distance)

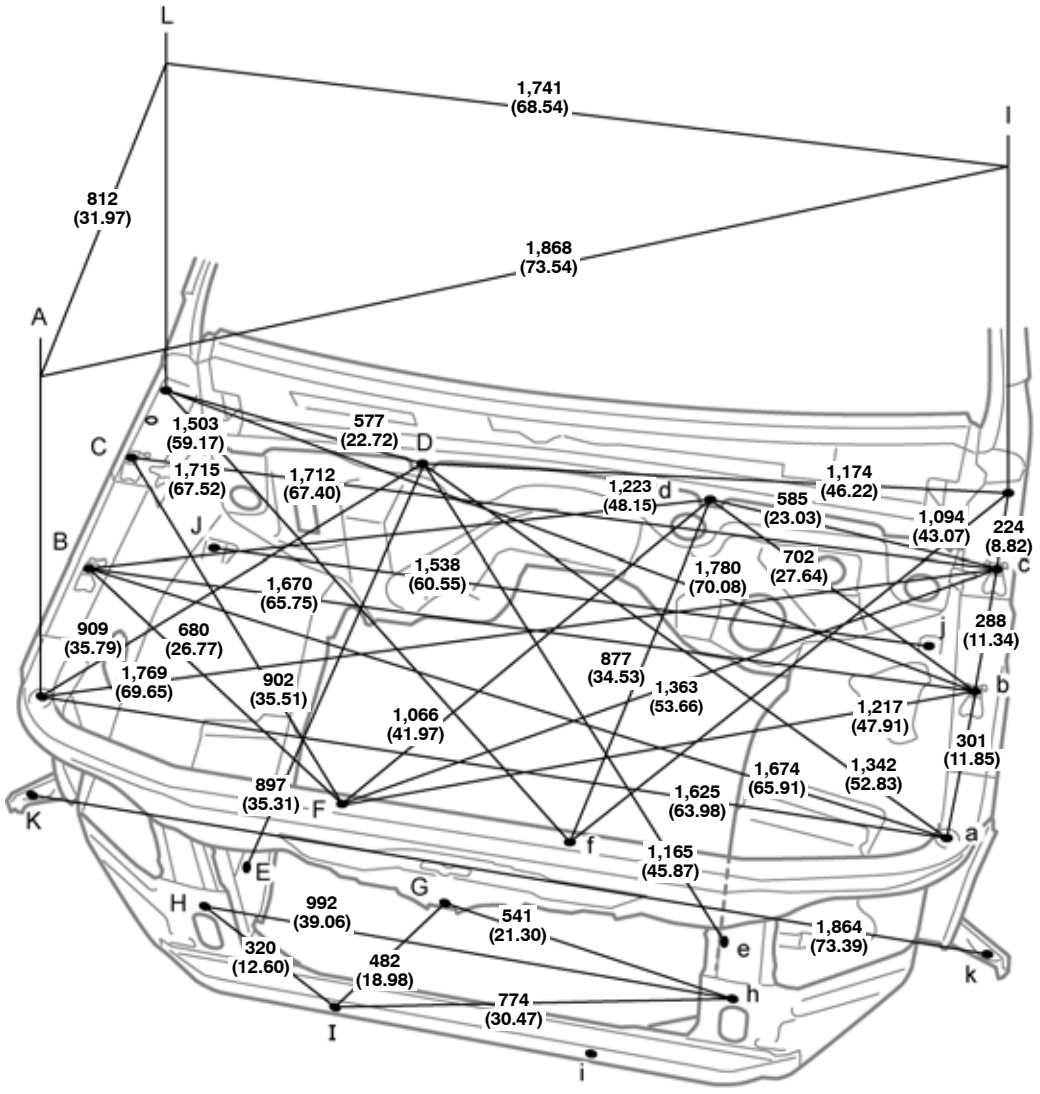

Vehicle Dimensions

A-C or a-c	B-L or b-l
589 (23.19)	511 (20.12)

Height from Imaginary Datum Line

A, a	L, l
961 (37.83)	1,043 (41.06)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front fender installation nut	M6 (0.24)	G	Radiator support brace installation nut	M6 (0.24)
B, b	Front fender installation nut	M6 (0.24)	H, h	Radiator support standard hole	ø10 (0.39)
C, c	Front fender installation nut	M6 (0.24)	I, i	Front crossmember standard hole	ø10 (0.39)
D, d	Cowl louver installation nut	M6 (0.24)	J, j	Front fender apron standard hole	ø15 (0.59)
E, e	Front fender No. 2 side apron standard hole	ø10 (0.39)	K, k	Front fender bracket standard hole	ø10 (0.39)
F, f	Radiator support standard hole	ø10 (0.39)	L, l	Hood hinge installation nut	M8 (0.31)
—	—	—	—	—	—

BODY OPENING AREAS
Regular Cab

(Three - Dimensional Distance)

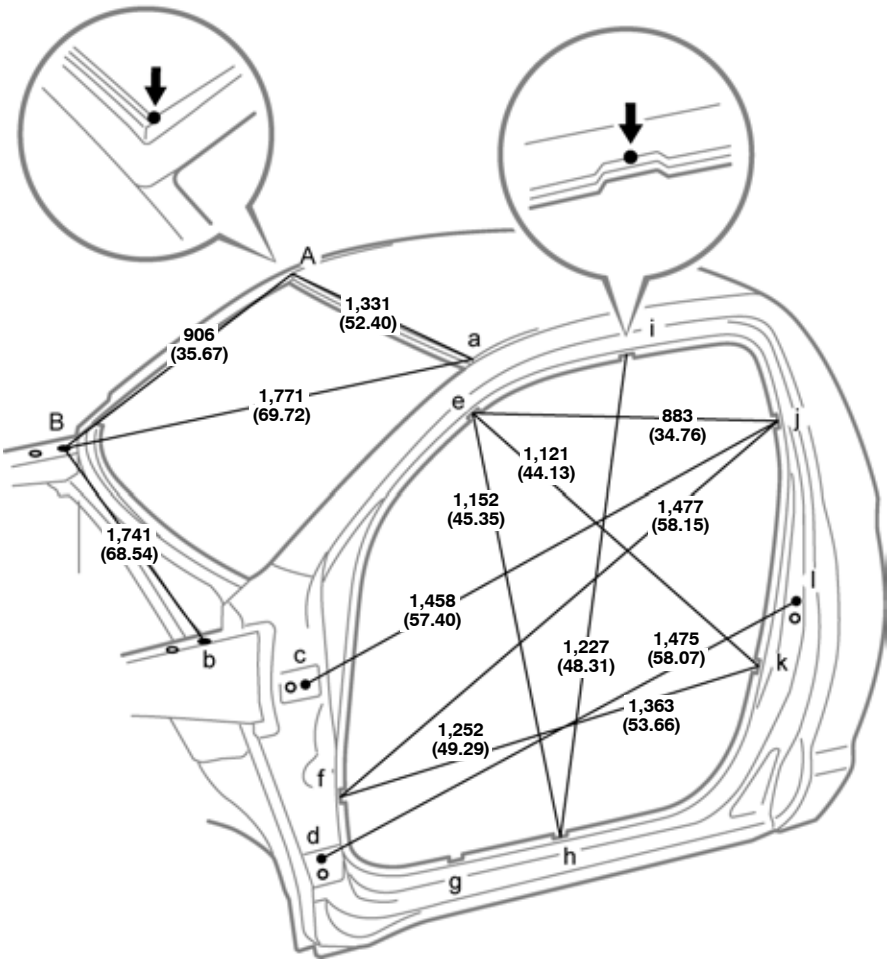

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,476 (58.11)	1,662 (65.43)	1,662 (65.43)	1,662 (65.43)	1,410 (55.51)	1,610 (63.39)	1,700 (66.93)	1,802 70.94)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-h or g-H	H-i or h-I	J-k or j-K
1,834 (72.20)	1,944 (76.54)	1,777 (69.96)	2,204 (86.77)	2,096 (82.52)	1,689 (66.50)	1,962 (77.24)	1,766 (69.53)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	J, j	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Front)
Double Cab

(Three-Dimensional Ditance)

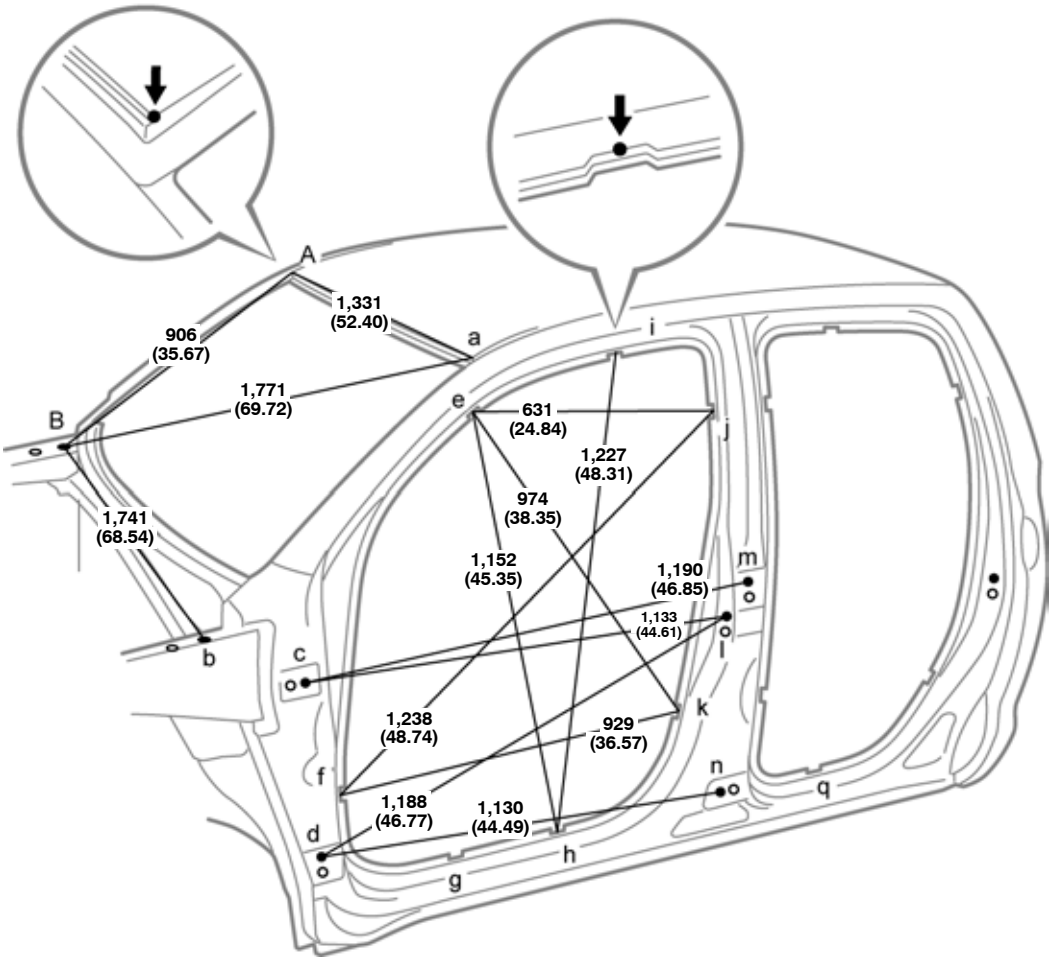

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,476 (58.11)	1,662 (65.43)	1,662 (65.43)	1,662 (65.43)	1,410 (55.51)	1,615 (63.58)	1,689 (66.50)	1,803 (70.98)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-q or g-Q	H-i or h-I	J-k or j-K
1,834 (72.20)	1,944 (76.54)	1,668 (65.67)	2,053 (80.83)	1,916 (75.43)	1,971 (77.60)	1,962 (77.24)	1,783 (70.20)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	J, j	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
			Q, g	Rocker panel assembly mark	—

BODY OPENING AREAS (Side View: Rear)
Double Cab

(Three - Dimensional Distance)

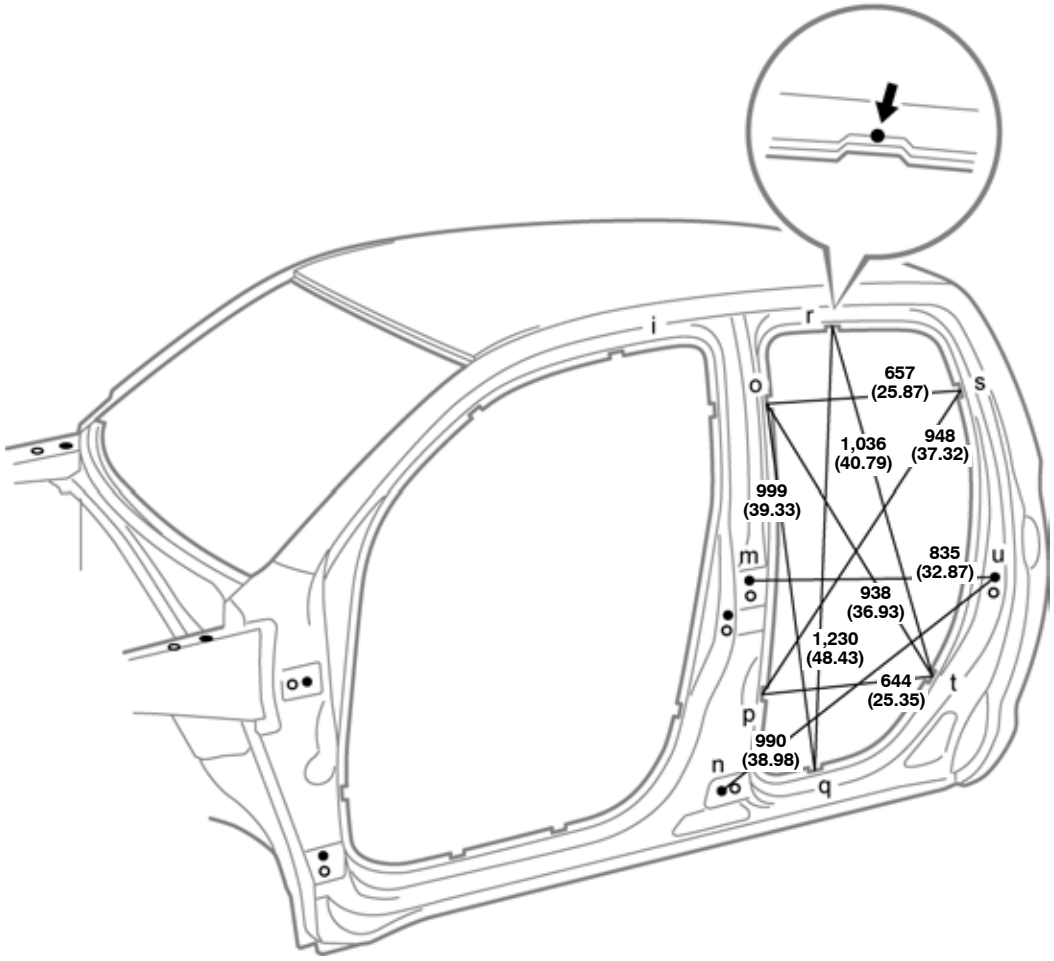

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,617 (63.66)	1,689 (66.50)	1,662 (65.43)	1,406 (55.35)	1,621 (63.82)	1,710 (67.32)	1,837 (72.32)

I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,551 (61.06)	1,747 (68.78)	1,909 (75.16)	1,817 (71.54)	1,962 (77.24)	1,805 (71.06)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
I, i	Roof side rail assembly mark	—	Q, q	Rocker panel assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	R, r	Roof side rail assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Front)
CrewMax

(Three - Dimensional Ditance)

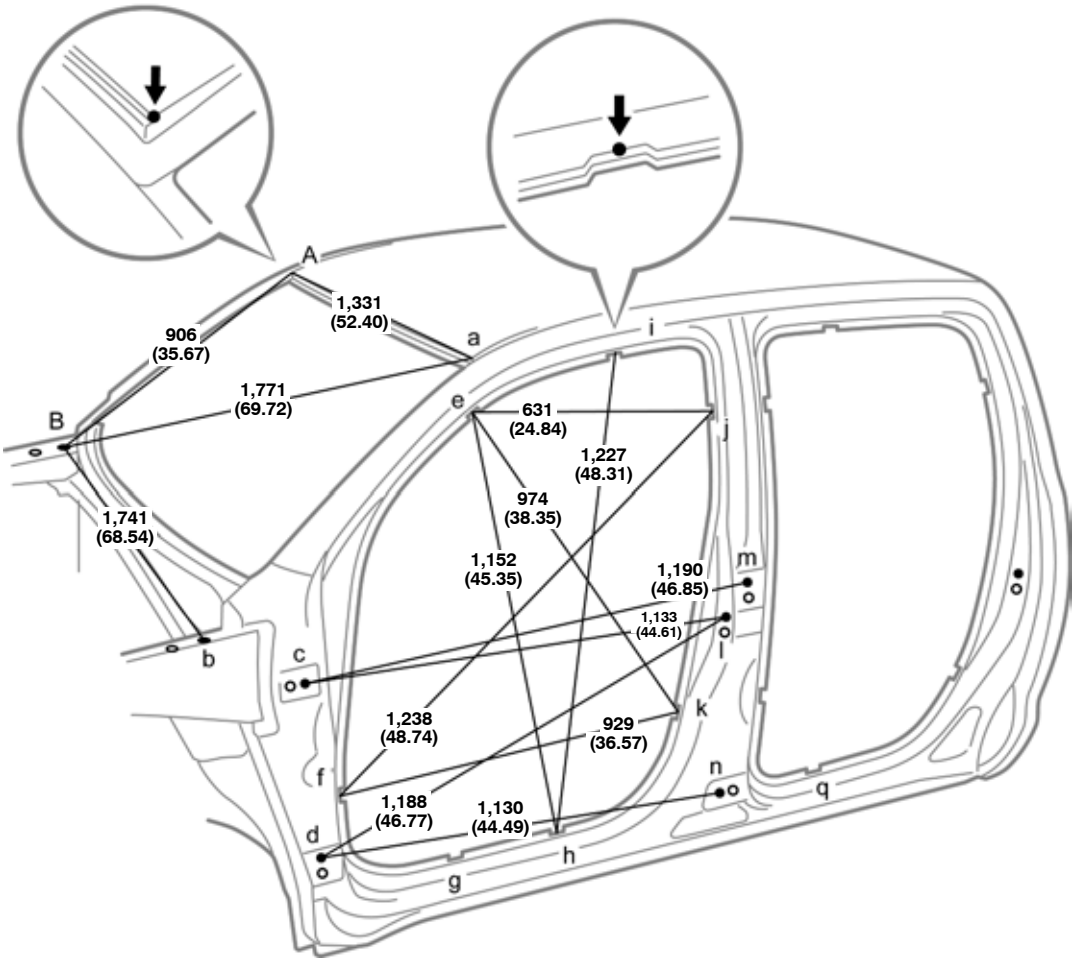

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,476 (58.11)	1,662 (65.43)	1,662 (65.43)	1,662 (65.43)	1,410 (55.51)	1,615 (63.58)	1,689 (66.50)	1,803 (70.98)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-q or g-Q	H-i or h-I	J-k or j-K
1,834 (72.20)	1,944 (76.54)	1,668 (65.67)	2,053 (80.83)	1,916 (75.43)	1,971 (77.60)	1,962 (77.24)	1,783 (70.20)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	J, j	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
			Q, g	Rocker panel assembly mark	—

BODY OPENING AREAS (Side View: Rear)
CrewMax

(Three - Dimensional Distance)

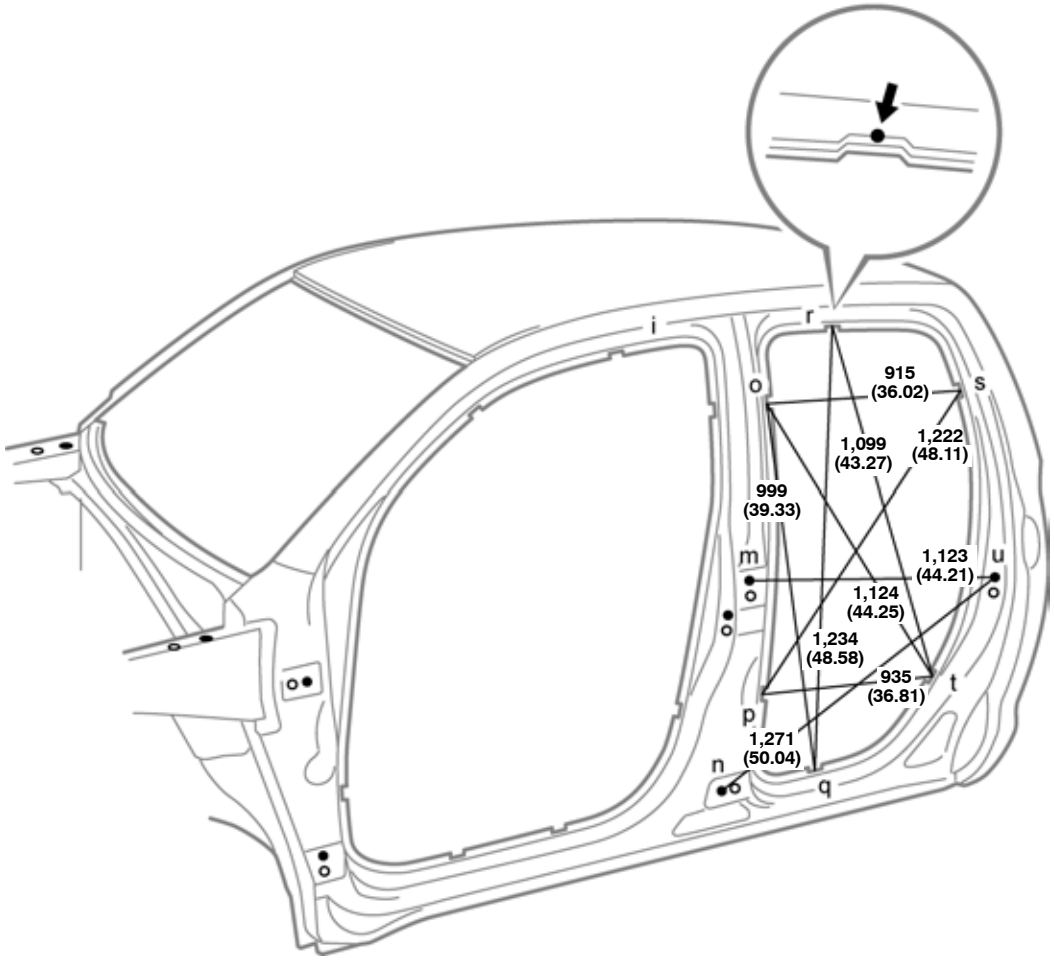

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,617 (63.66)	1,689 (66.50)	1,662 (65.43)	1,406 (55.35)	1,591 (62.64)	1,692 (66.61)	1,810 (71.26)

I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,579 (62.17)	1,846 (72.68)	2,000 (78.74)	1,932 (76.06)	1,965 (77.36)	1,785 (70.28)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
I, i	Roof side rail assembly mark	—	Q, q	Rocker panel assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	R, r	Roof side rail assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

FRAME DIMENSION - Upper Face
Regular Cab Standard Deck

(Three - Dimensional Distance)

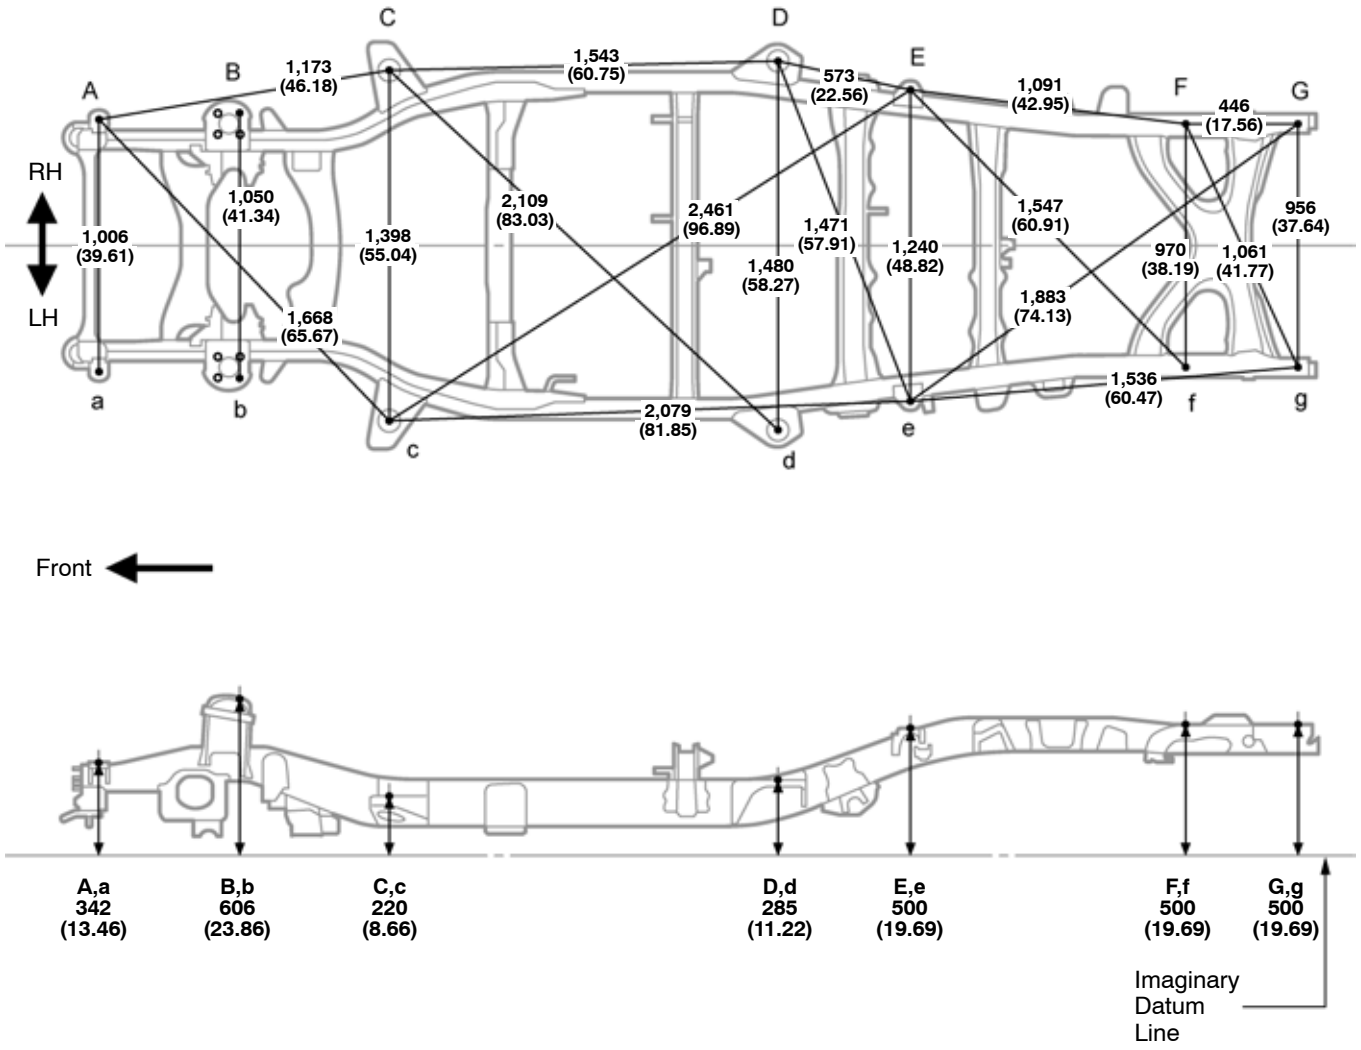


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	ø26 (1.02)	D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)	E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	F, f	Rear body installation nut	M12 (0.47)
			G, g	Rear body installation nut	M12 (0.47)

FRAME DIMENSION - Upper Face
Regular Cab Standard Deck

(Two - Dimensional Distance)

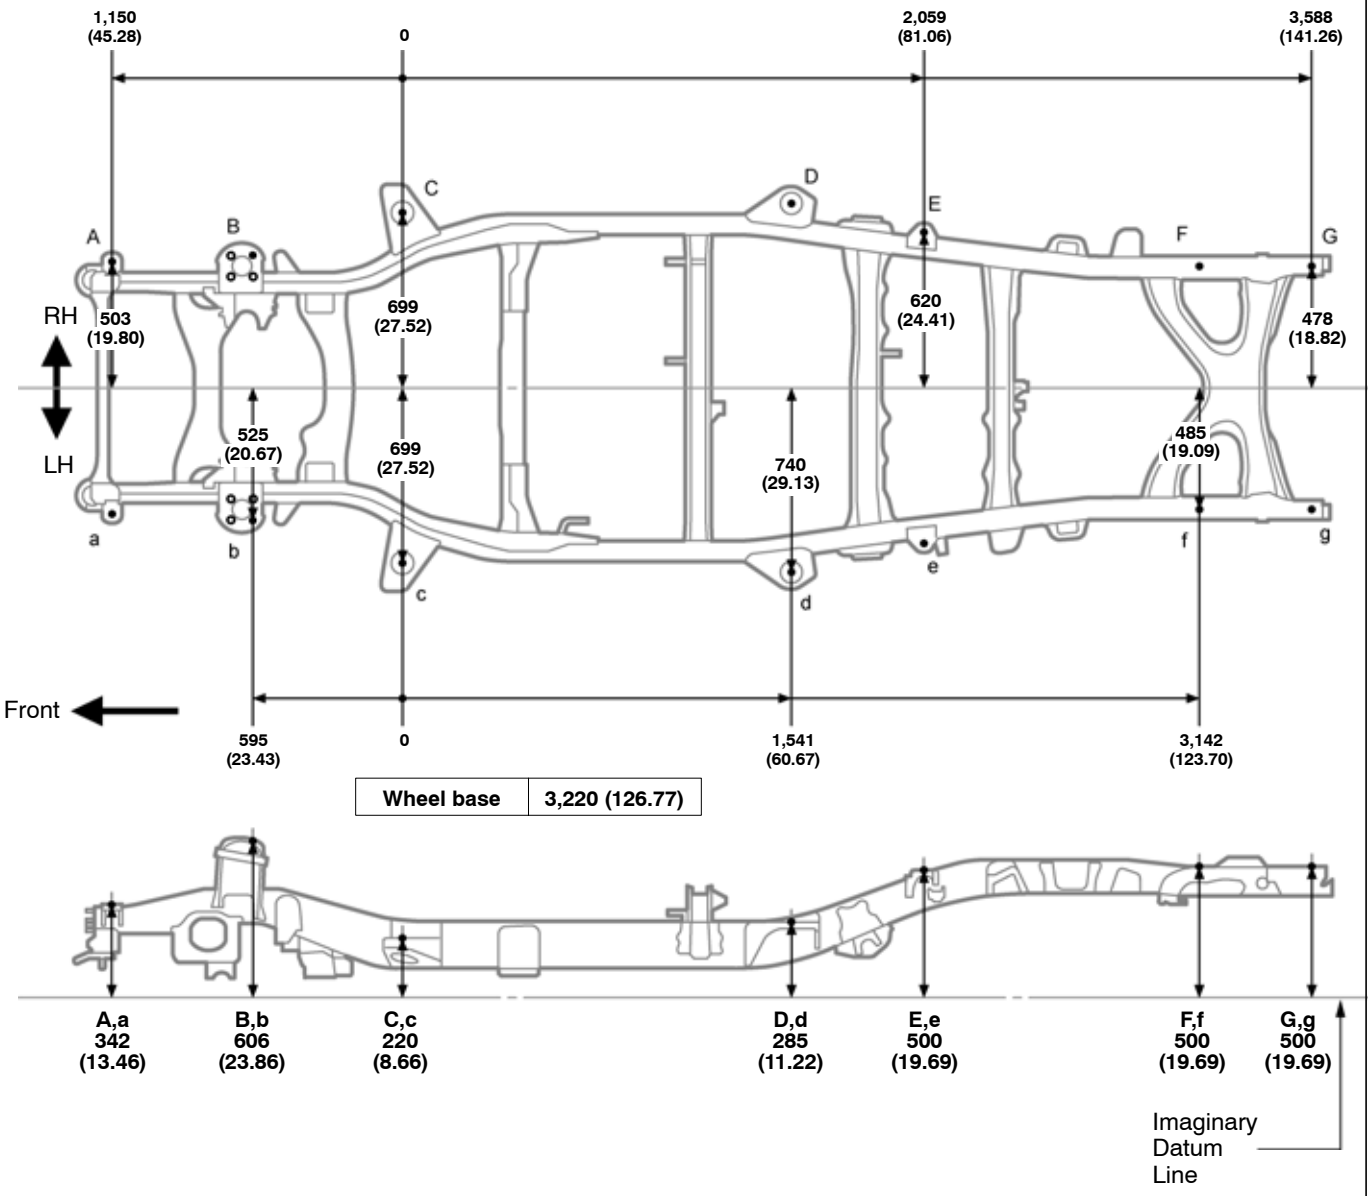


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Body mounting hole	ø26 (1.02)	D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)	E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	F, f	Rear body installation nut	M12 (0.47)
			G, g	Rear body installation nut	M12 (0.47)

FRAME DIMENSION - Upper Face
Regular Cab Long Deck

(Three - Dimensional Distance)

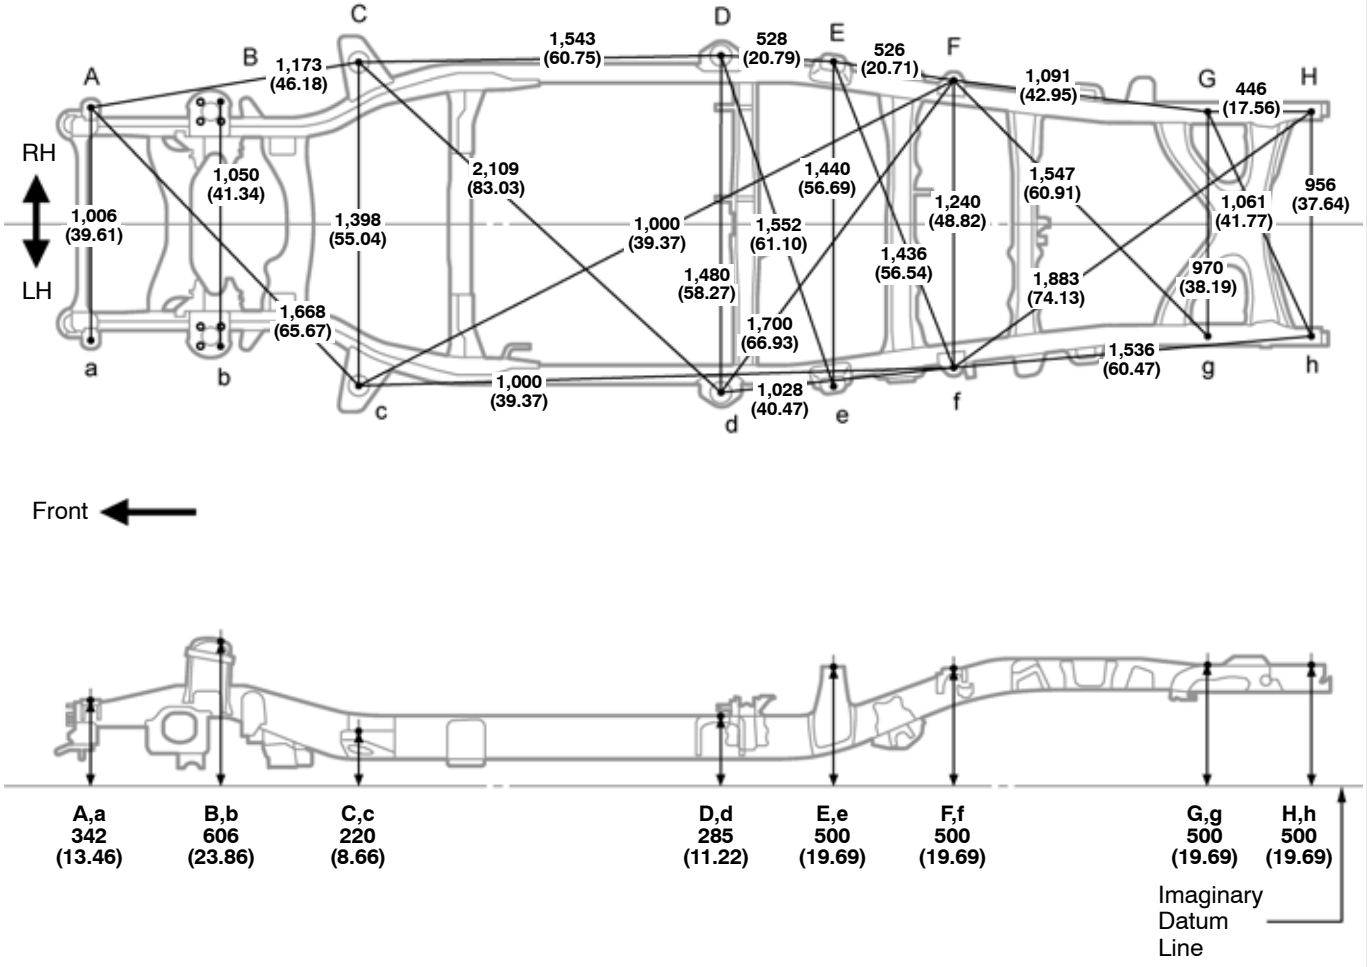


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Body mounting hole	ø26 (1.02)	E, e	Rear body installation nut	M12 (0.47)
B, b	Shock absorber installation hole	ø12.2 (0.480)	F, f	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	G, g	Rear body installation nut	M12 (0.47)
D, d	Body mounting hole	ø92.5 (3.641)	H, h	Rear body installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Upper Face
Regular Cab Long Deck

(Two - Dimensional Distance)

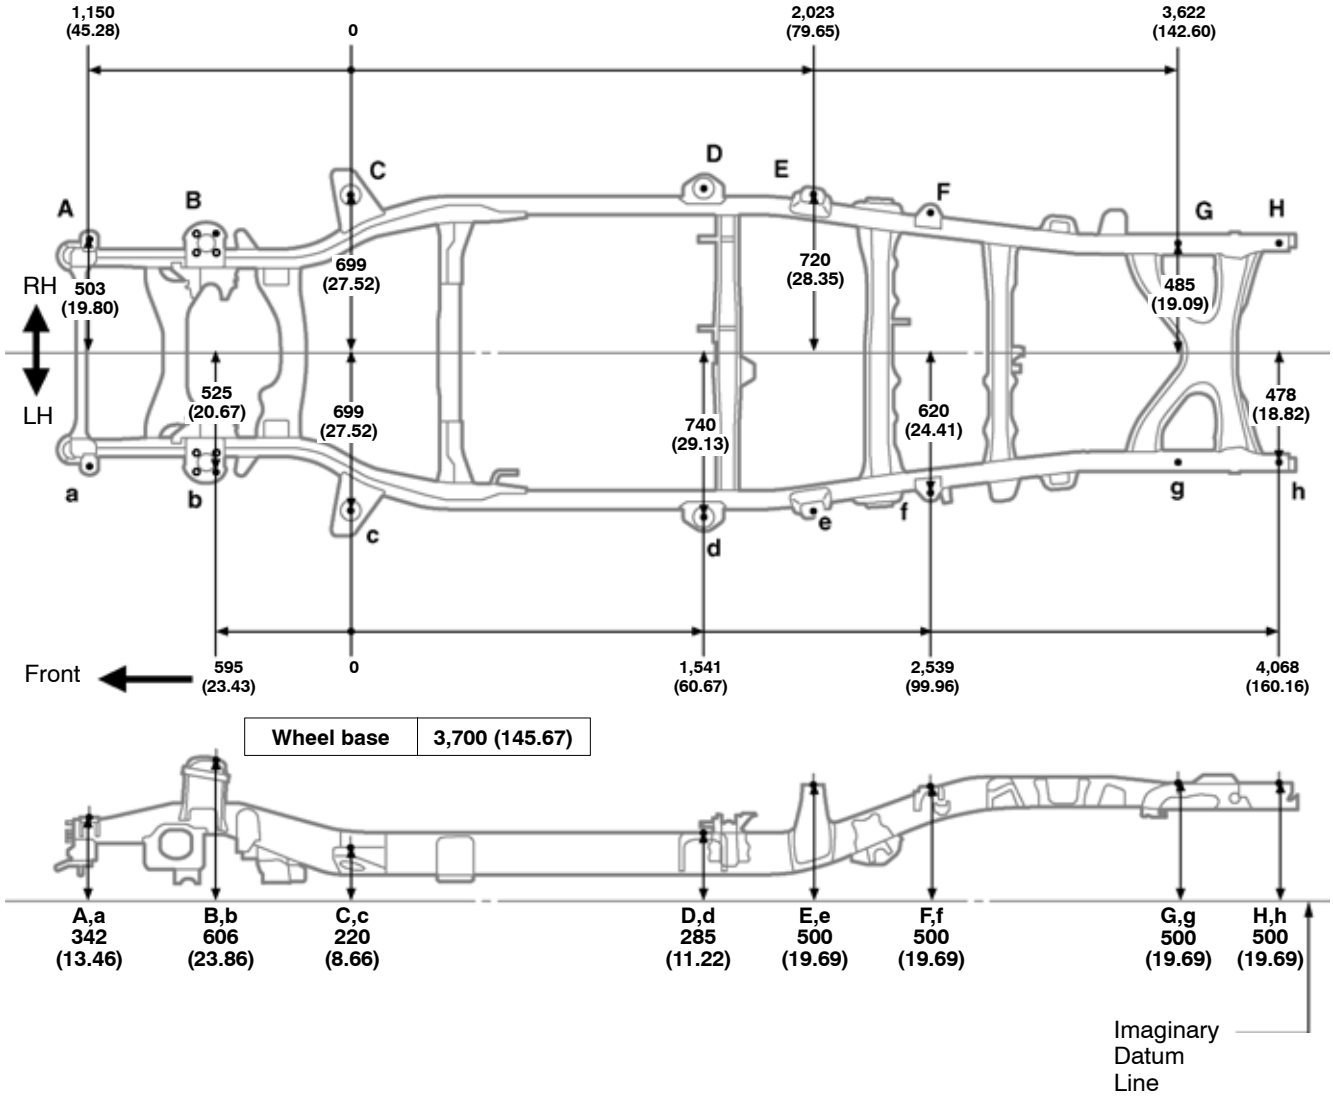


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)


Symbol	Name	Hole dia.			
A, a	Body mounting hole	ø26 (1.02)	E, e	Rear body installation nut	M12 (0.47)
B, b	Shock absorber installation hole	ø12.2 (0.480)	F, f	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	G, g	Rear body installation nut	M12 (0.47)
D, d	Body mounting hole	ø92.5 (3.641)	H, h	Rera body installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Upper Face
Double Cab Standard Deck

(Three - Dimensional Distance)

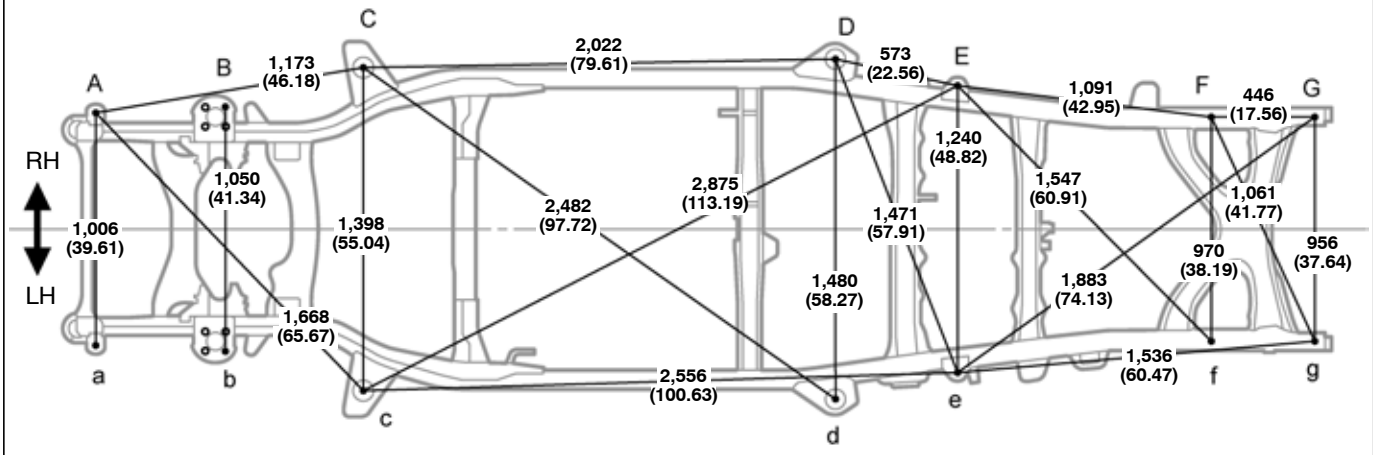

Front

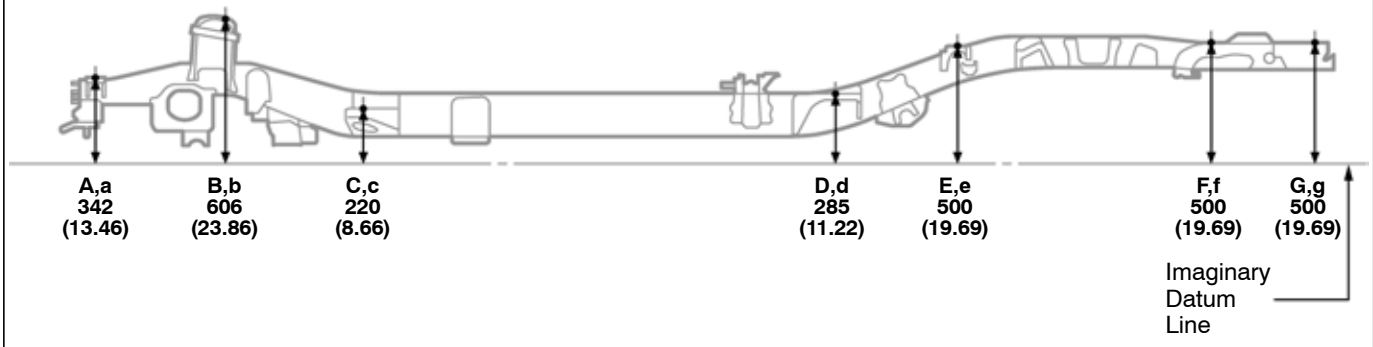


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	ø26 (1.02)	D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)	E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	F, f	Rear body installation nut	M12 (0.47)
			G, g	Rera body installation nut	M12 (0.47)

FRAME DIMENSION - Upper Face
Double Cab Standard Deck

(Two - Dimensional Distance)

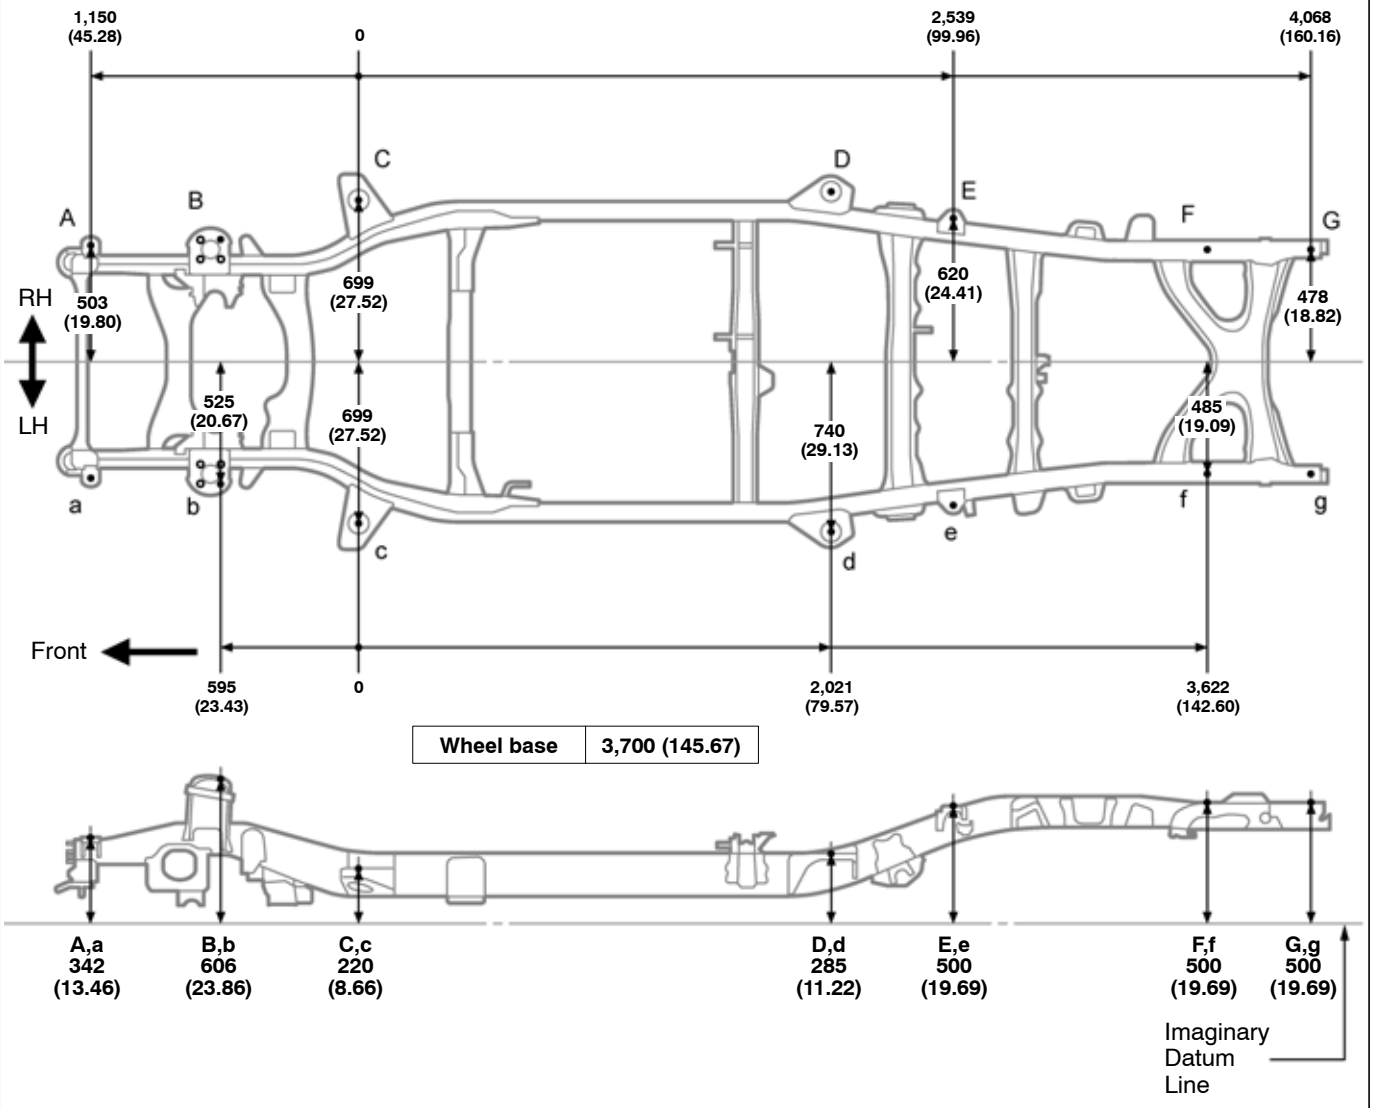


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Body mounting hole	ø26 (1.02)	D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)	E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	F, f	Rear body installation nut	M12 (0.47)
			G, g	Rear body installation nut	M12 (0.47)

FRAME DIMENSION - Upper Face
Double Cab Long Deck

(Three - Dimensional Distance)

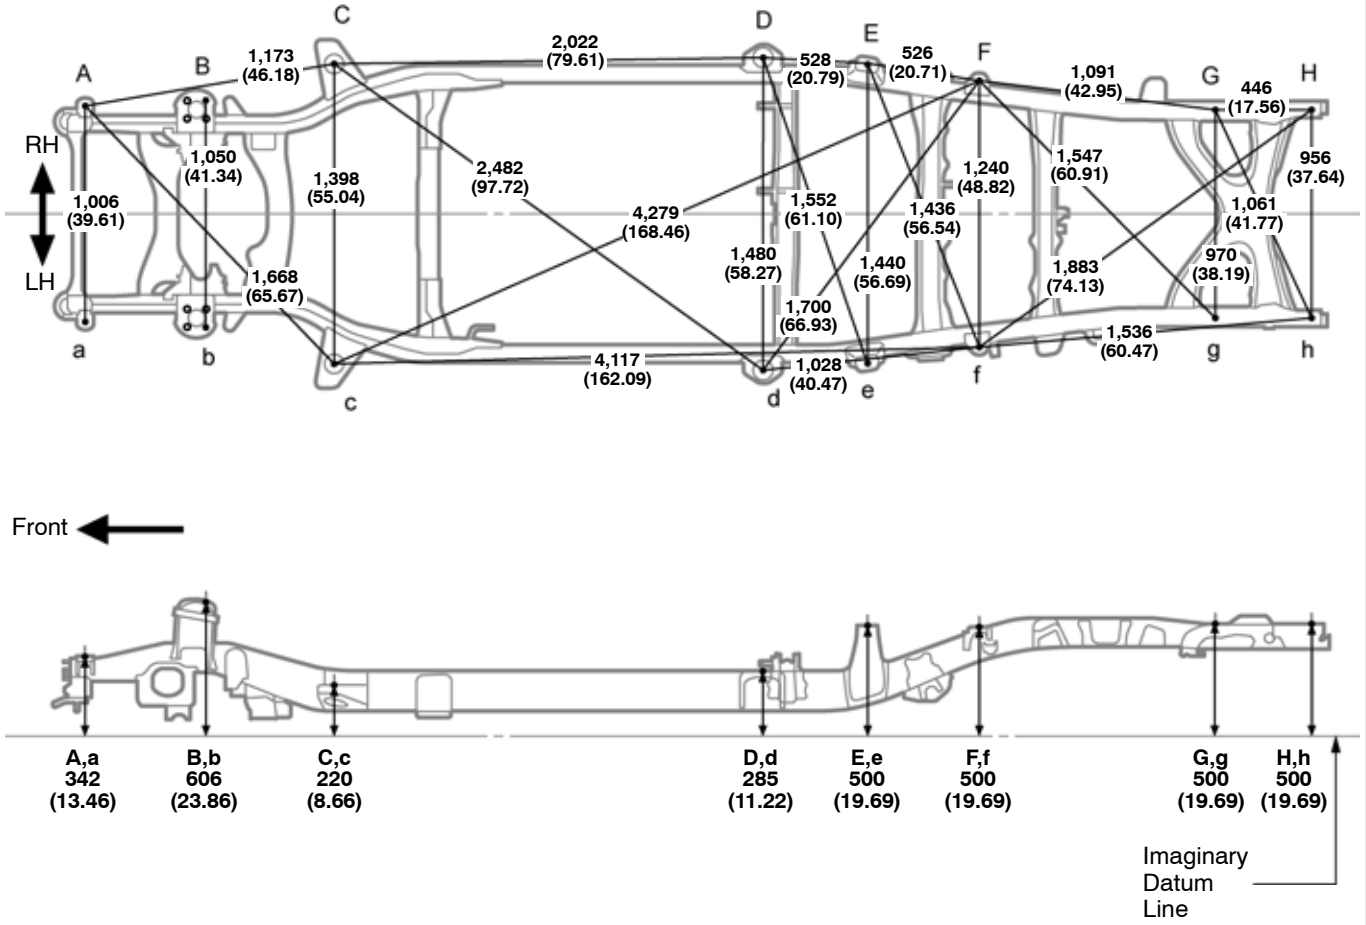


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Body mounting hole	ø26 (1.02)	E, e	Rear body installation nut	M12 (0.47)
B, b	Shock absorber installation hole	ø12.2 (0.480)	F, f	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	G, g	Rear body installation nut	M12 (0.47)
D, d	Body mounting hole	ø92.5 (3.641)	H, h	Rear body installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Upper Face
Double Cab Long Deck

(Two - Dimensional Distance)

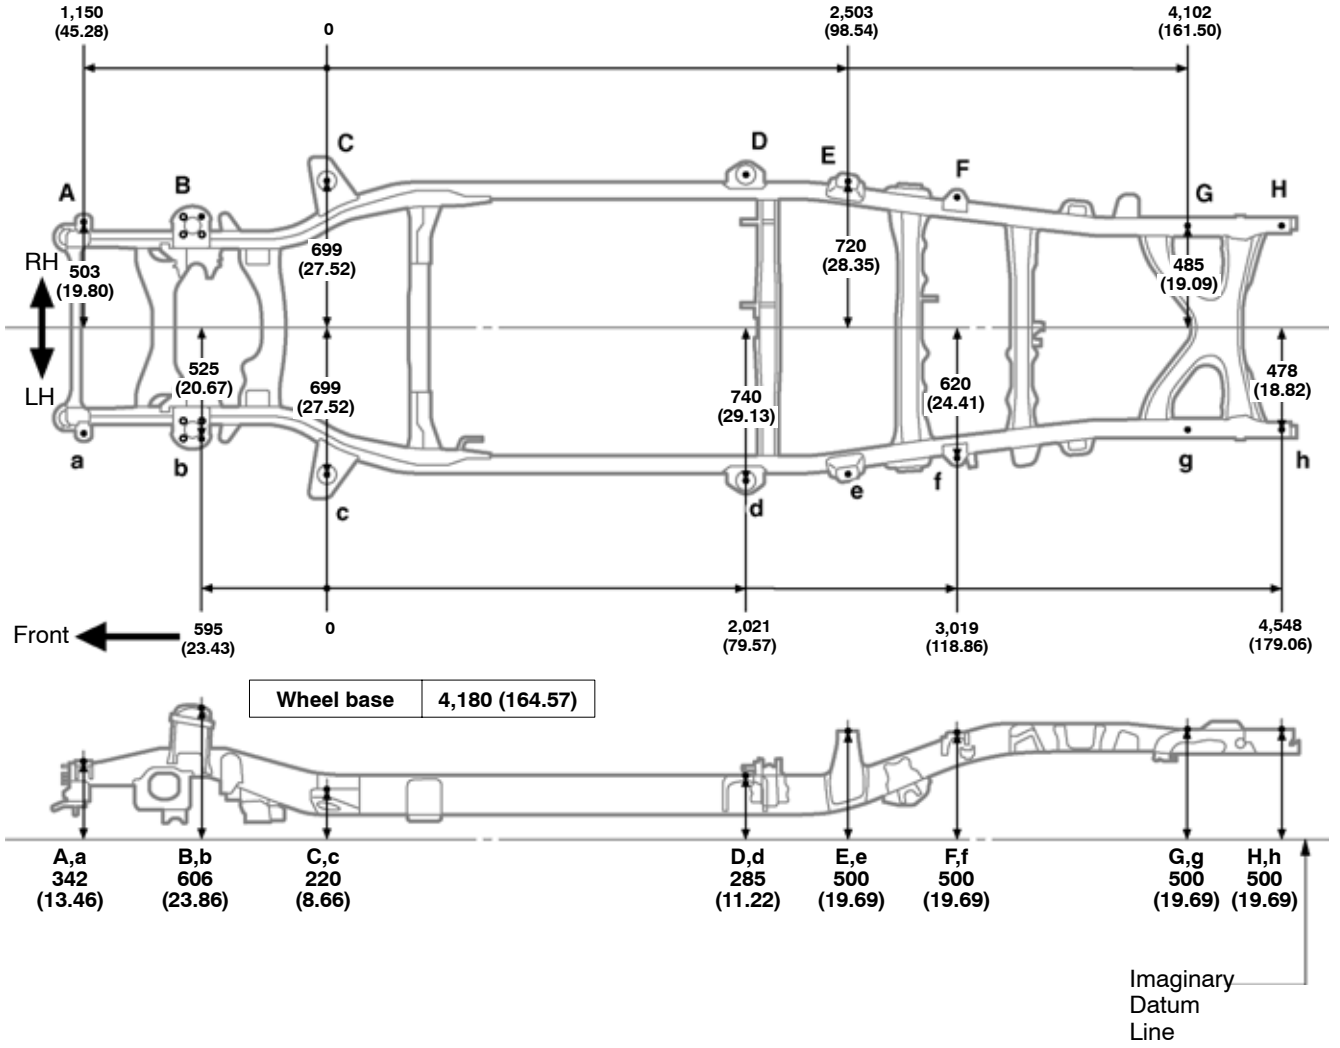


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Body mounting hole	ø26 (1.02)	E, e	Rear body installation nut	M12 (0.47)
B, b	Shock absorber installation hole	ø12.2 (0.480)	F, f	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	G, g	Rear body installation nut	M12 (0.47)
D, d	Body mounting hole	ø92.5 (3.641)	H, h	Rear body installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Upper Face
CrewMax

(Three - Dimensional Distance)

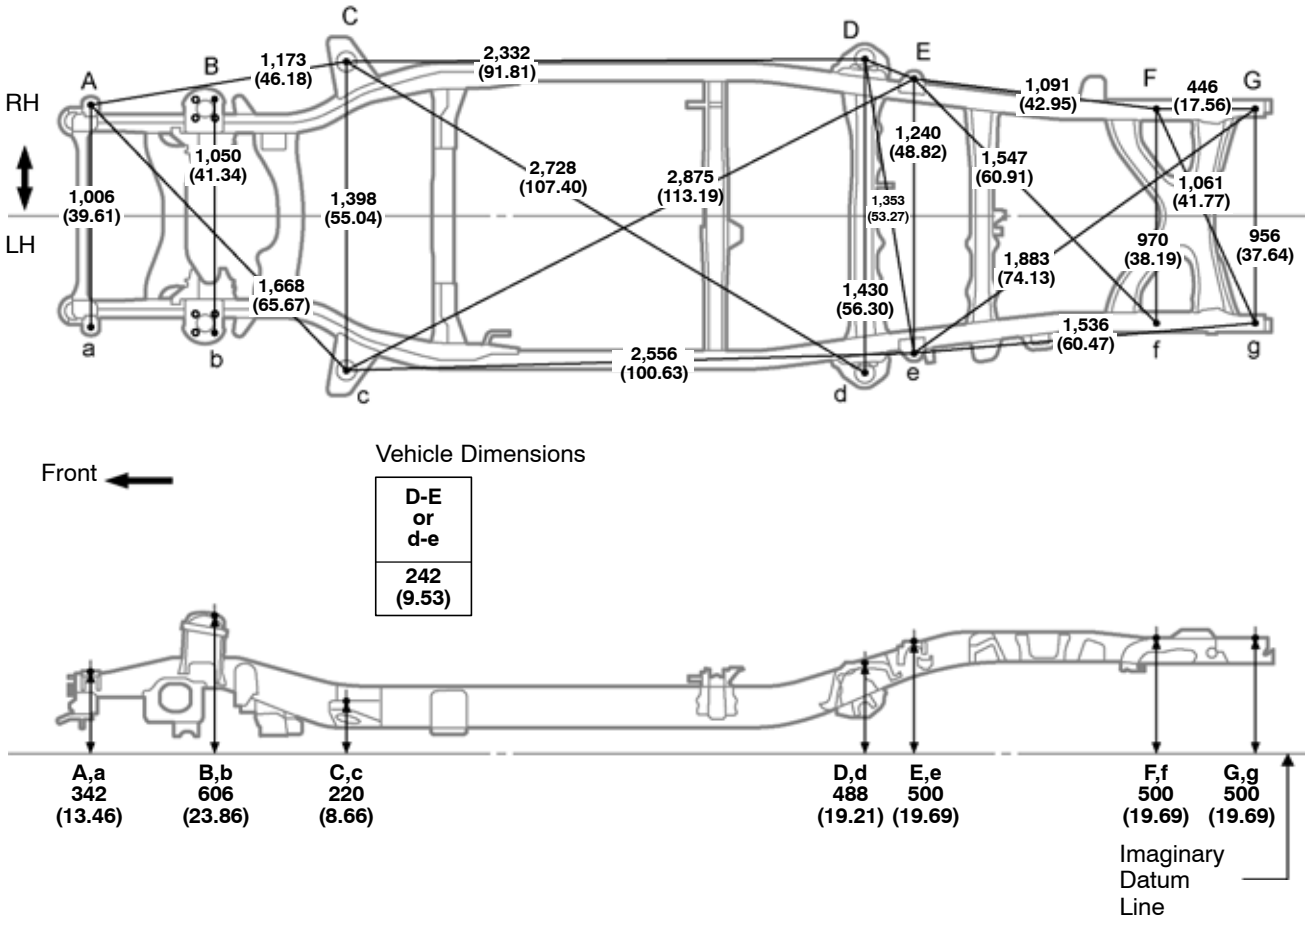


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Body mounting hole	ø26 (1.02)		D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)		E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)		F, f	Rear body installation nut	M12 (0.47)
				G g	Rear body installation nut	M12 (0.47)

FRAME DIMENSION - Upper Face
CrewMax

(Two - Dimensional Distance)

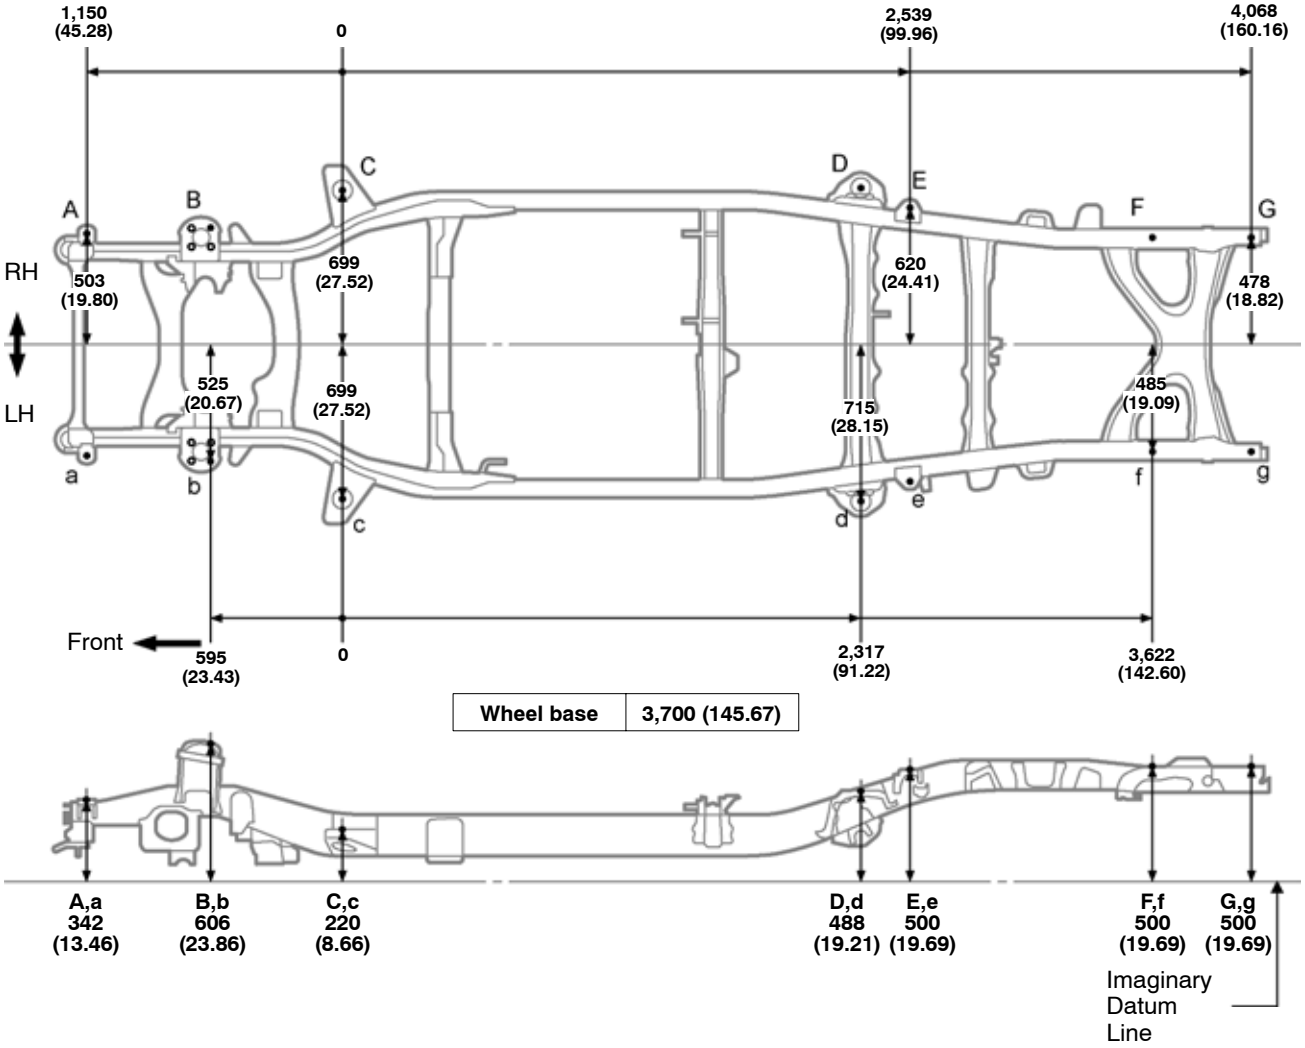


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Body mounting hole	ø26 (1.02)	D, d	Body mounting hole	ø92.5 (3.641)
B, b	Shock absorber installation hole	ø12.2 (0.480)	E, e	Rear body installation nut	M12 (0.47)
C, c	Body mounting hole	ø92.5 (3.641)	F, f	Rear body installation nut	M12 (0.47)
			G, g	Rear body installation nut	M12 (0.47)

FRAME DIMENSION - Lower Face
Regular Cab Standard Deck

(Three - Dimensional Distance)

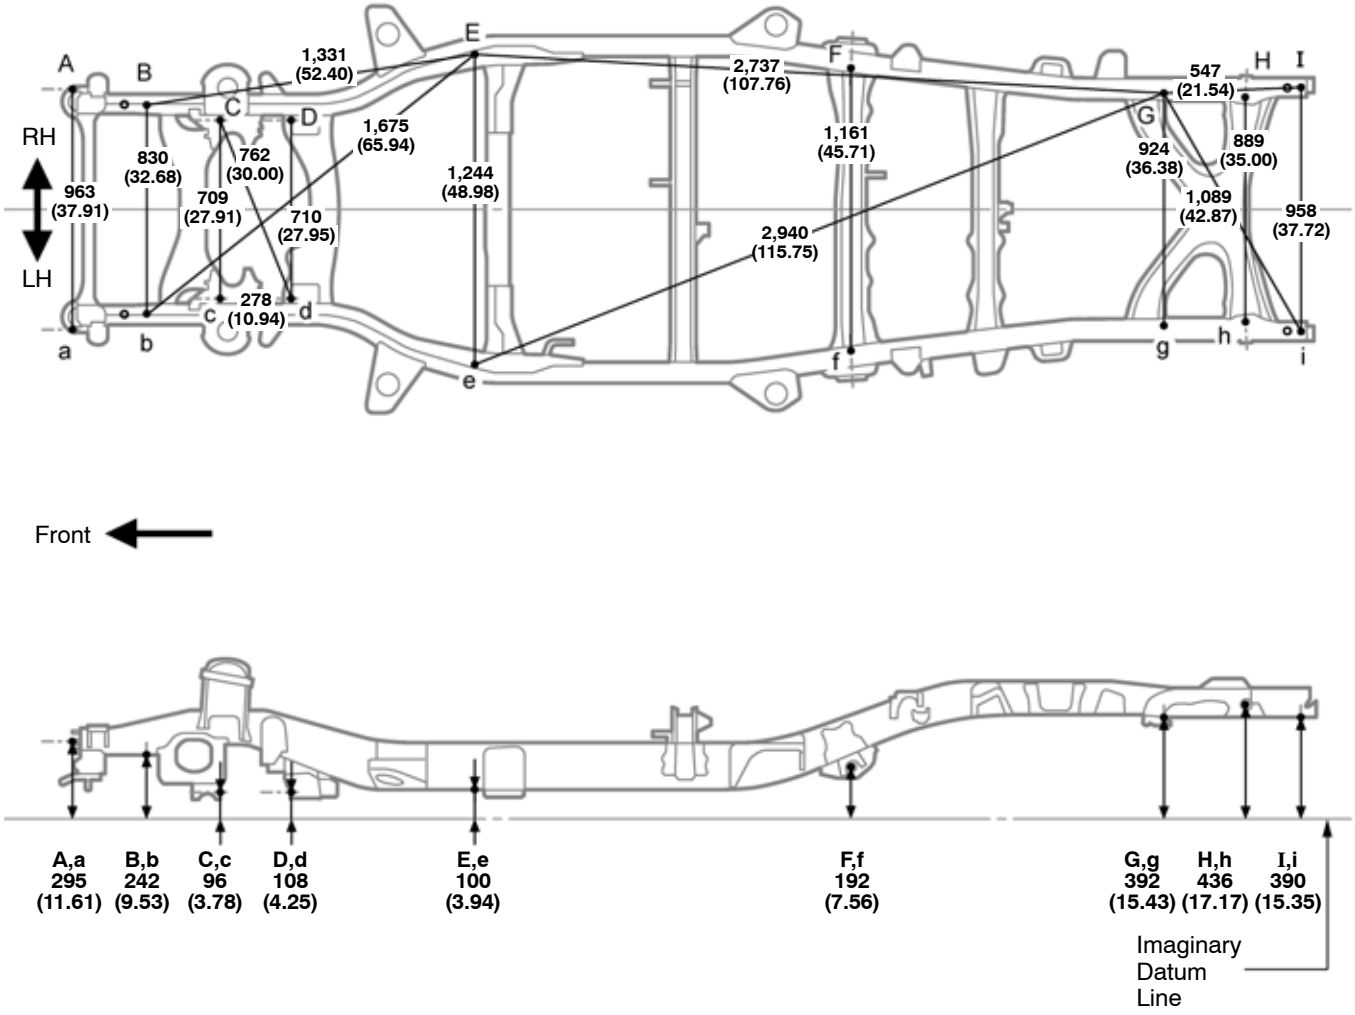


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 094)		G, g	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		H, h	Spring shackle installation hole-inner	ø40 (1.57)
				I, i	Rear frame rail No. 3 patch installation hole	ø13 (0.51)

FRAME DIMENSION - Lower Face
Regular Cab Standard Deck

(Two - Dimensional Distance)

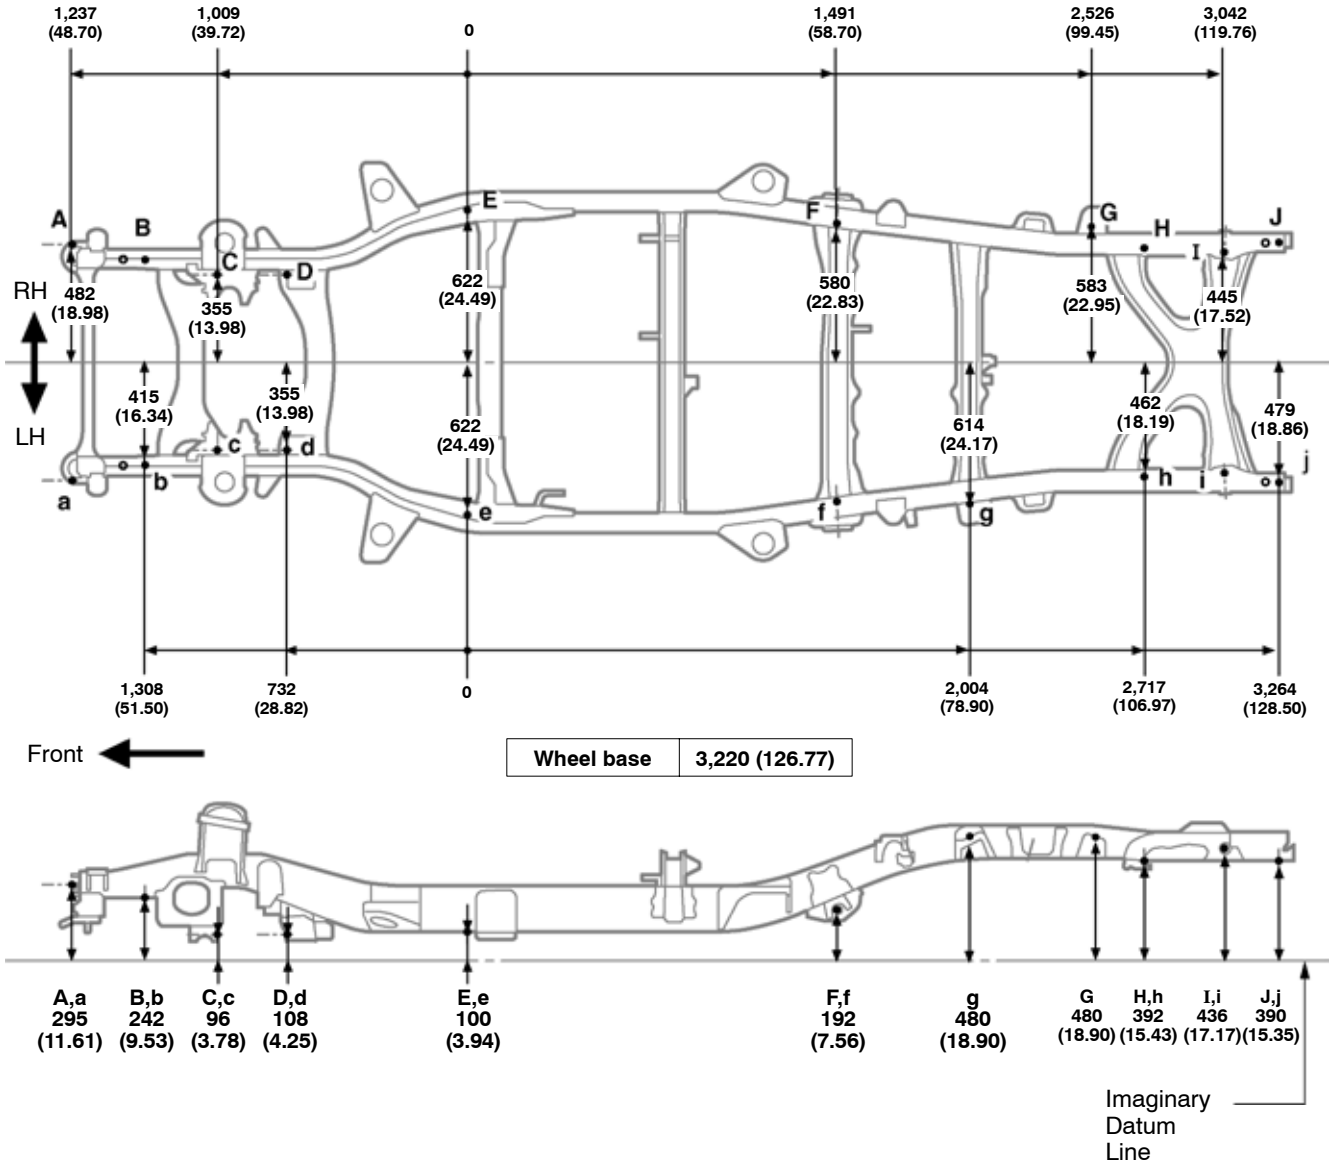


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		G, g	Rear shock absorber installation hole	ø28 (1.18)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)		H, h	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		I, i	Spring shackle installation hole-inner	ø40 (1.57)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)		J, j	Rear frme rail No. 3 patch installation hole	ø13 (0.51)
				—	—	—

FRAME DIMENSION - Lower Face
Regular Cab Long Deck

(Three - Dimensional Distance)

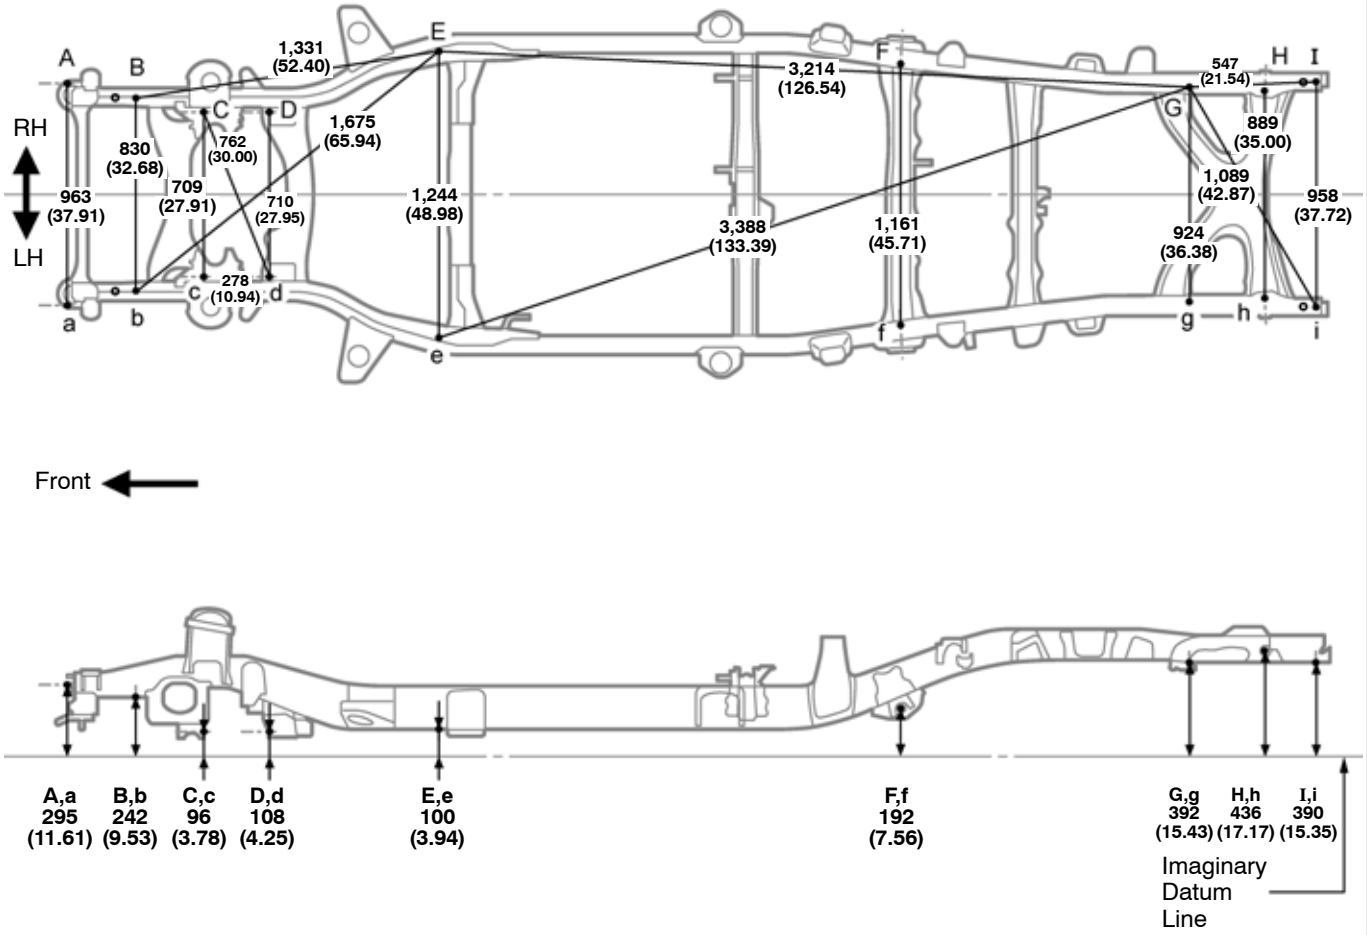


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)		G, g	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		H, h	Spring shackle installation hole-inner	ø40 (1.57)
				I, i	Rear frame rail No. 3 patch installation hole	ø13 (0.51)

FRAME DIMENSION - Lower Face
Regular Cab Long Deck

(Two - Dimensional Distance)

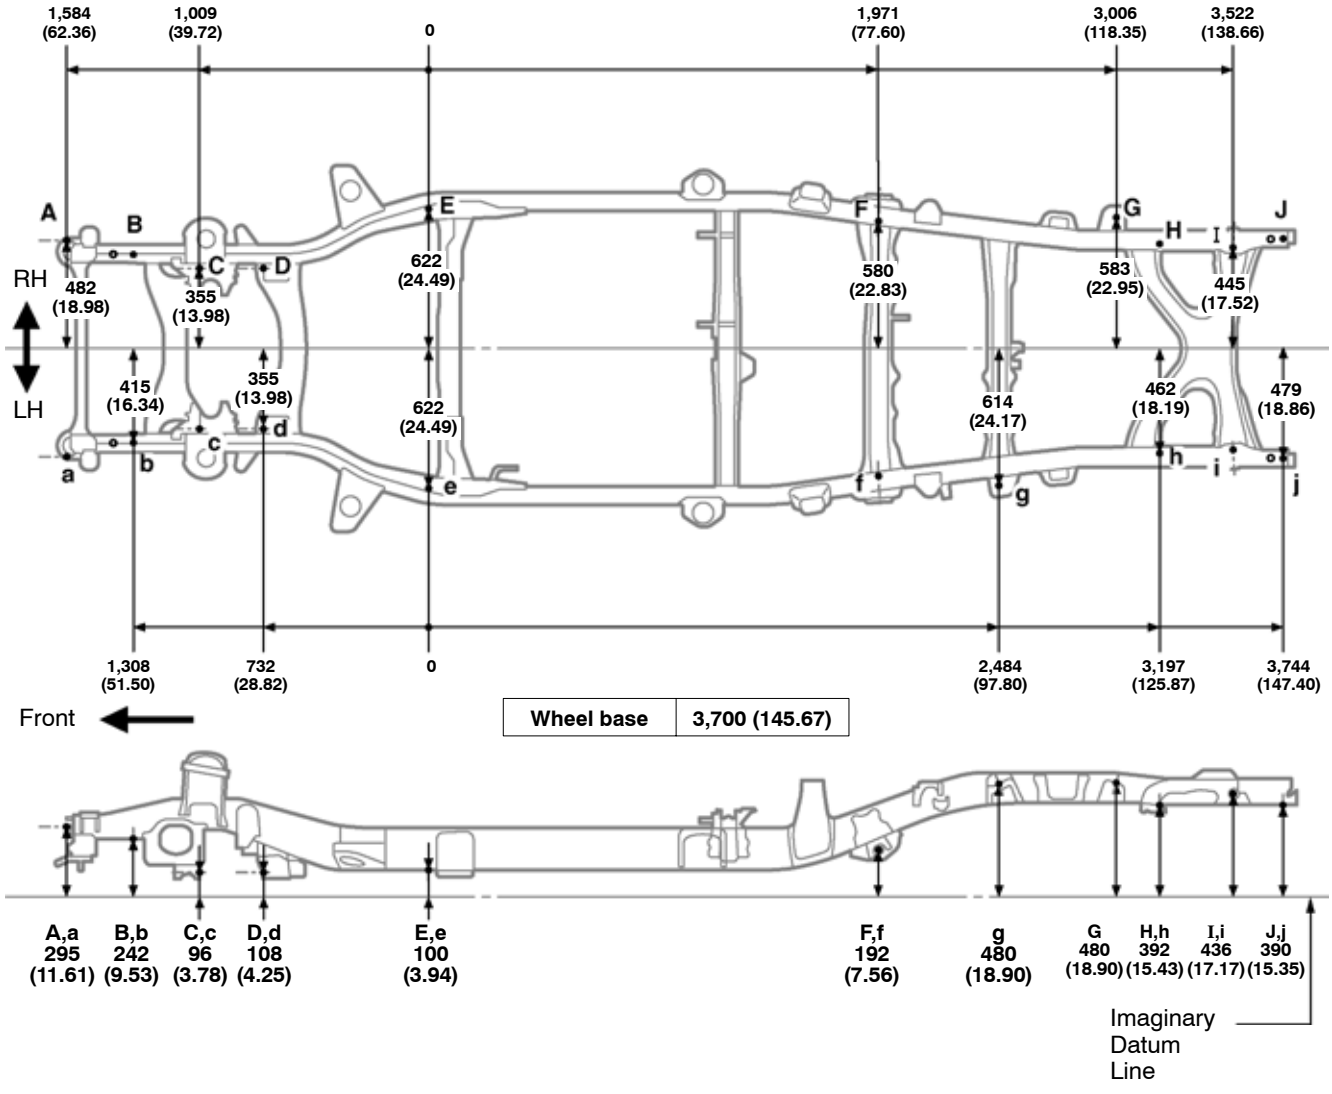


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	M10 (0.39)	F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Rear shock absorber installation hole	ø28 (1.18)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)	H, h	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)	I, i	Spring shackle installation hole-inner	ø40 (1.57)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x0.63)	J, j	Rear frame rail No. 3 patch installation hole	ø13 (0.51)
			—	—	—

FRAME DIMENSION - Lower Face
Double Cab Standard Deck

(Three - Dimensional Distance)

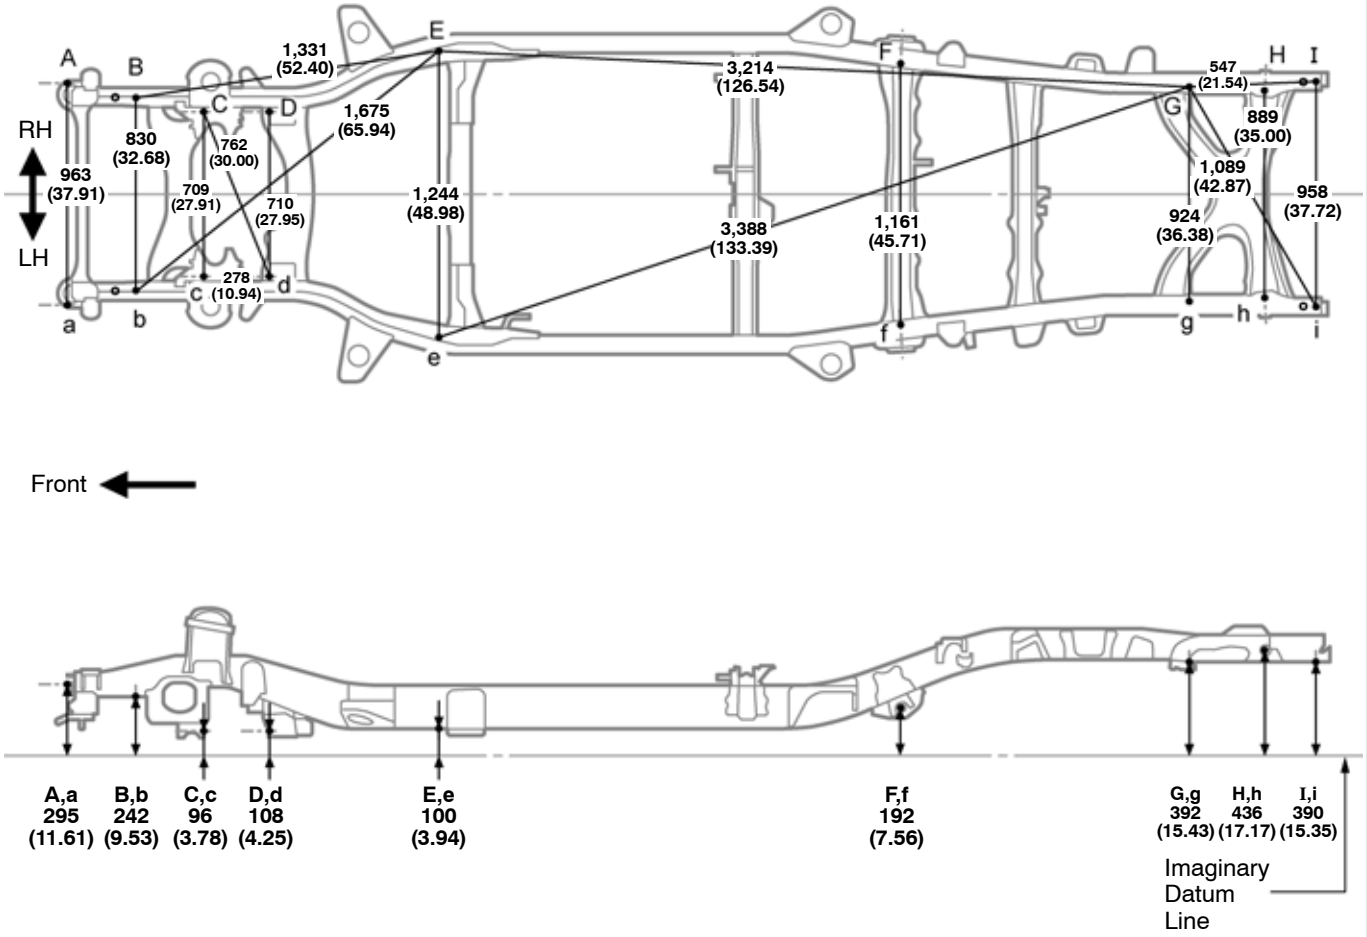


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)		G, g	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		H, h	Spring shackle installation hole-inner	ø40 (1.57)
				I, i	Rear frame rail No. 3 patch installation hole	ø13 (0.51)

FRAME DIMENSION - Lower Face
Double Cab Standard Deck

(Two - Dimensional Distance)

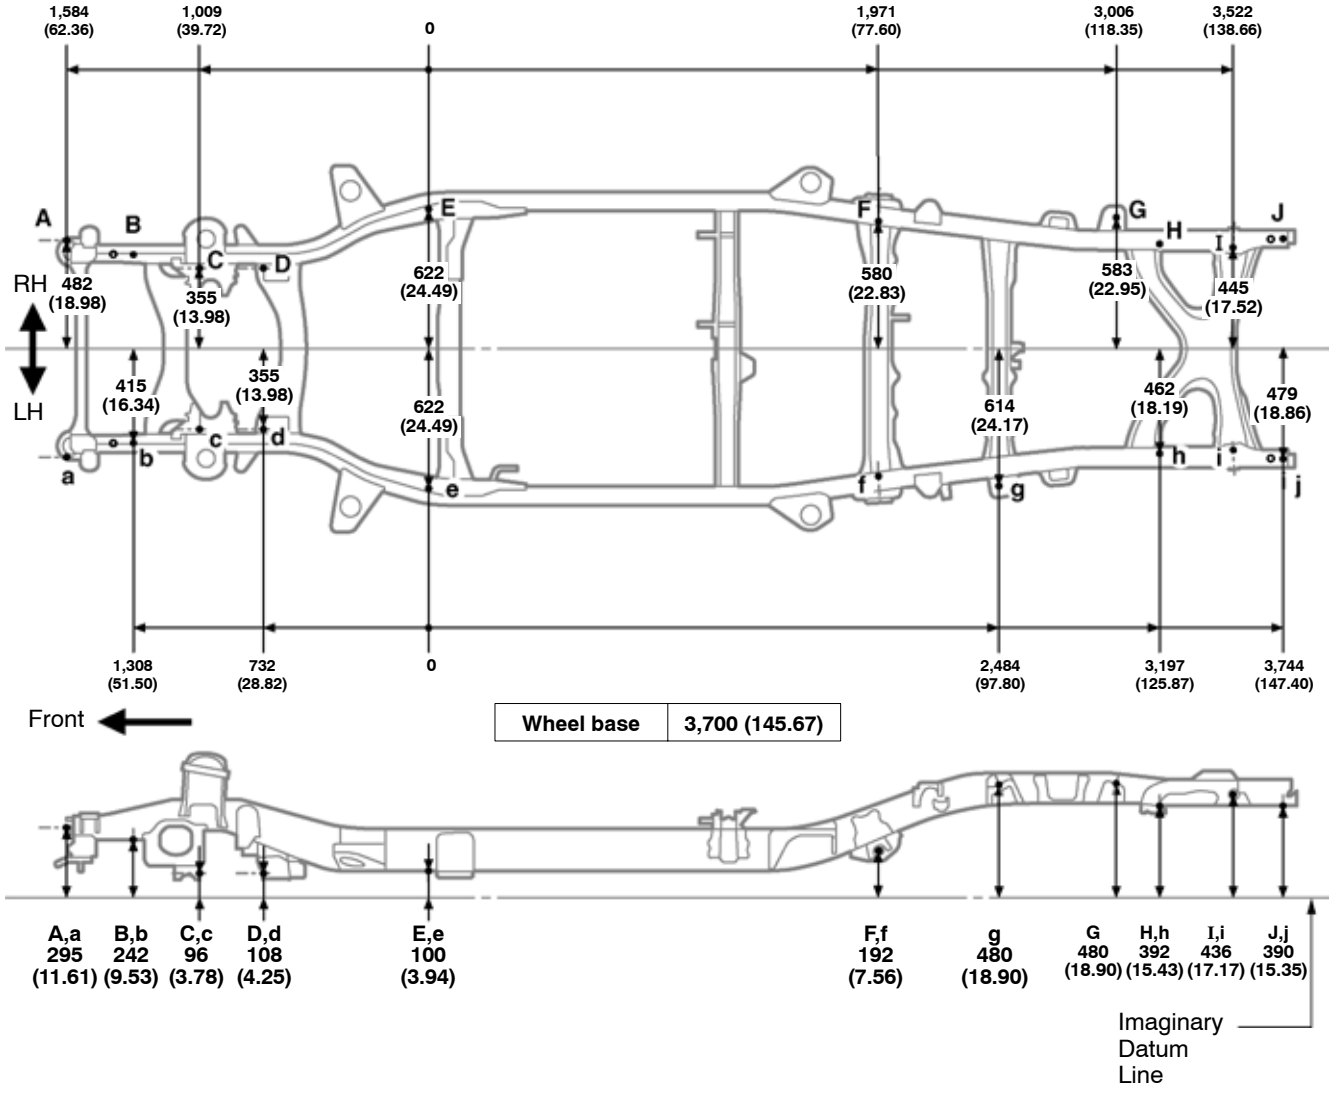


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)	F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Rear shock absorber installation hole	ø28 (1.18)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)	H, h	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)	I, i	Spring shackle installation hole-inner	ø40 (1.57)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Rear frame rail No. 3 patch installation hole	ø13 (0.51)
—	—	—	—	—	—

FRAME DIMENSION - Lower Face
Double Cab Long Deck

(Three - Dimensional Distance)

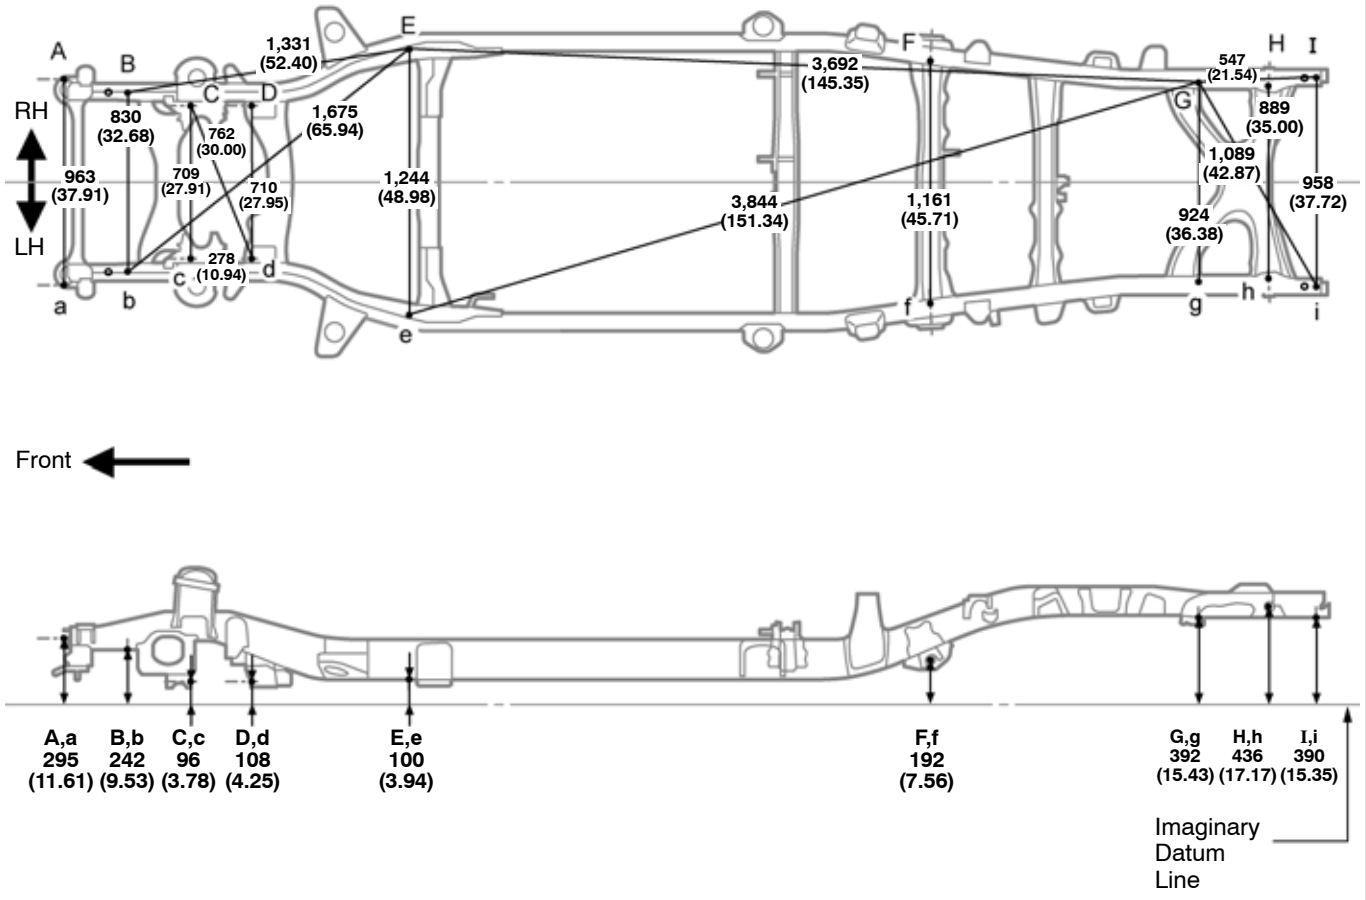


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)		G, g	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		H, h	Spring shackle installation hole-inner	ø40 (1.57)
				I, i	Rear frame rail No. 3 patch installation hole	ø13 (0.51)

FRAME DIMENSION - Lower Face
Double Cab Long Deck

(Two - Dimensional Distance)

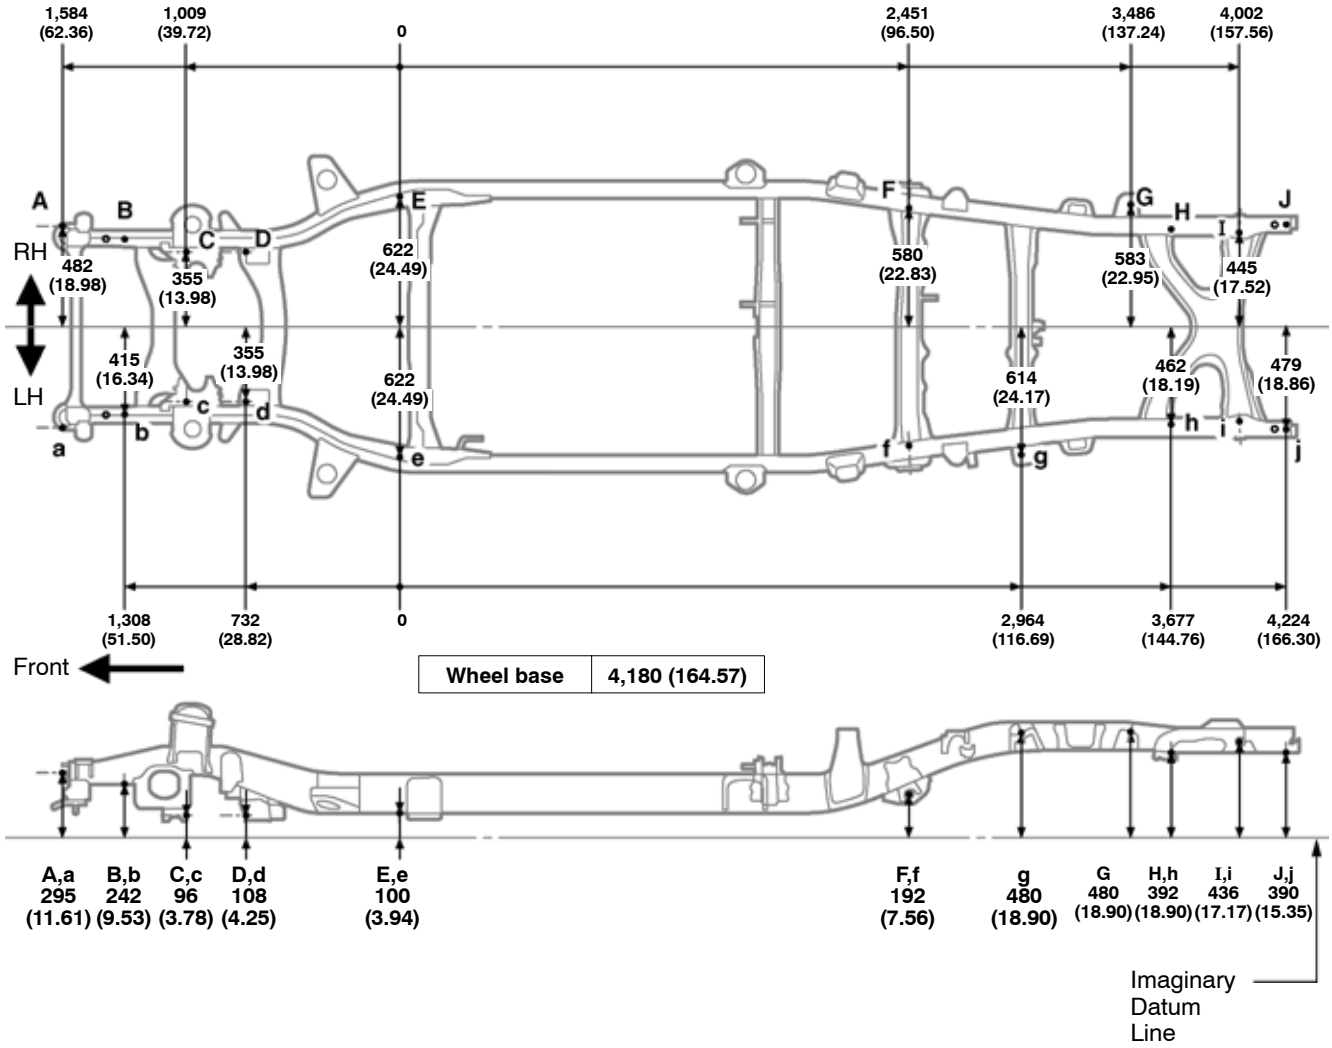


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Bumper reinforcement installation bolt	M10 (0.39)	F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Reaer shock absorber installation hole	ø28 (1.18)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)	H, h	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)	I, i	Spring shackle installation hole-inner	ø40 (1.57)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Rera frame rail No. 3 patch installation hole	ø13 (0.51)
—	—	—	—	—	—

FRAME DIMENSION - Lower Face
CrewMax

(Three - Dimensional Distance)

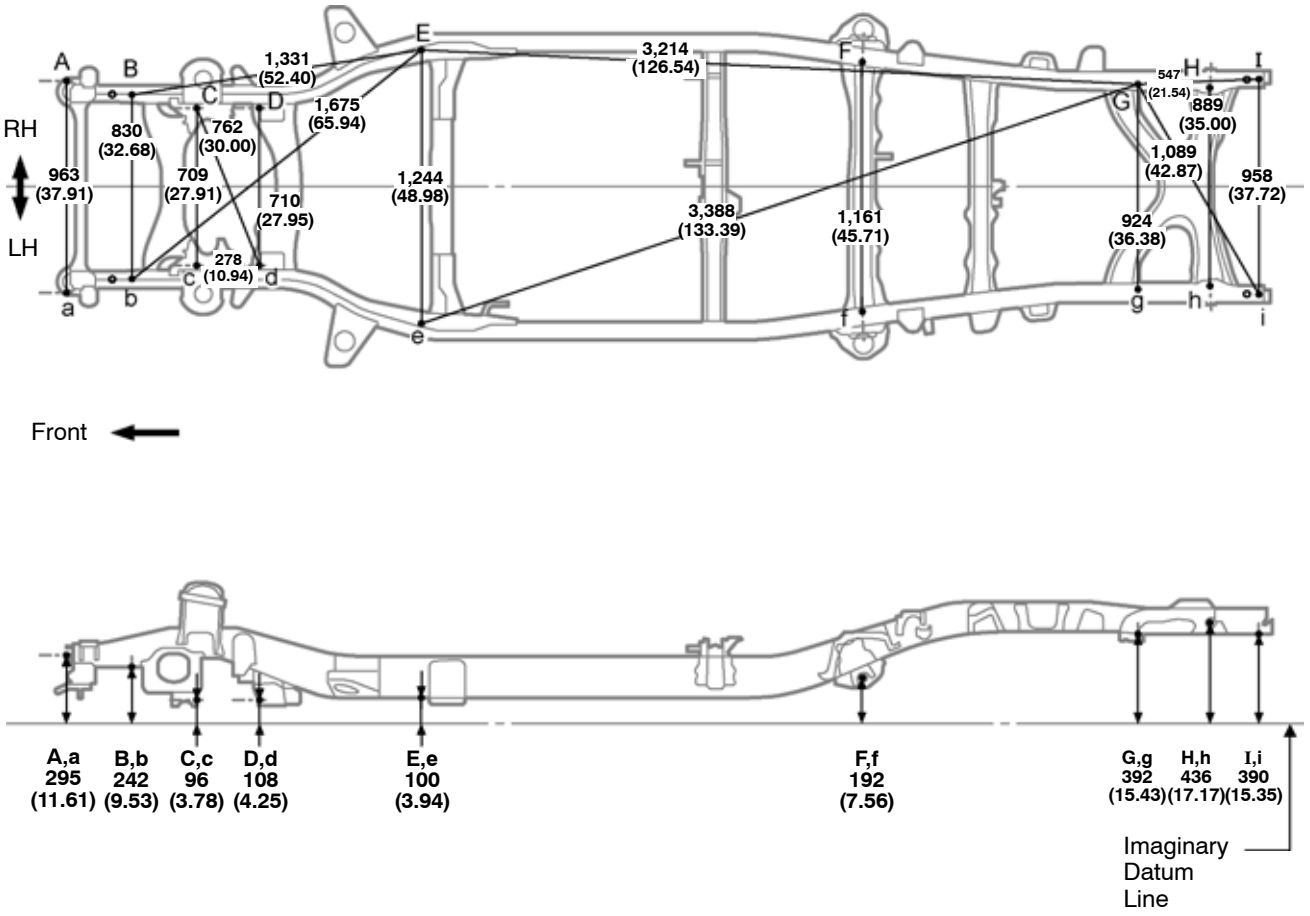


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)		E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)		F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)		G, g	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)		H, h	Spring shackle installation hole-inner	ø40 (1.57)
				I, i	Rear frame rail No. 3 patch installation hole	ø13 (0.51)

FRAME DIMENSION - Lower Face
CrewMax

(Two - Dimensional Distance)

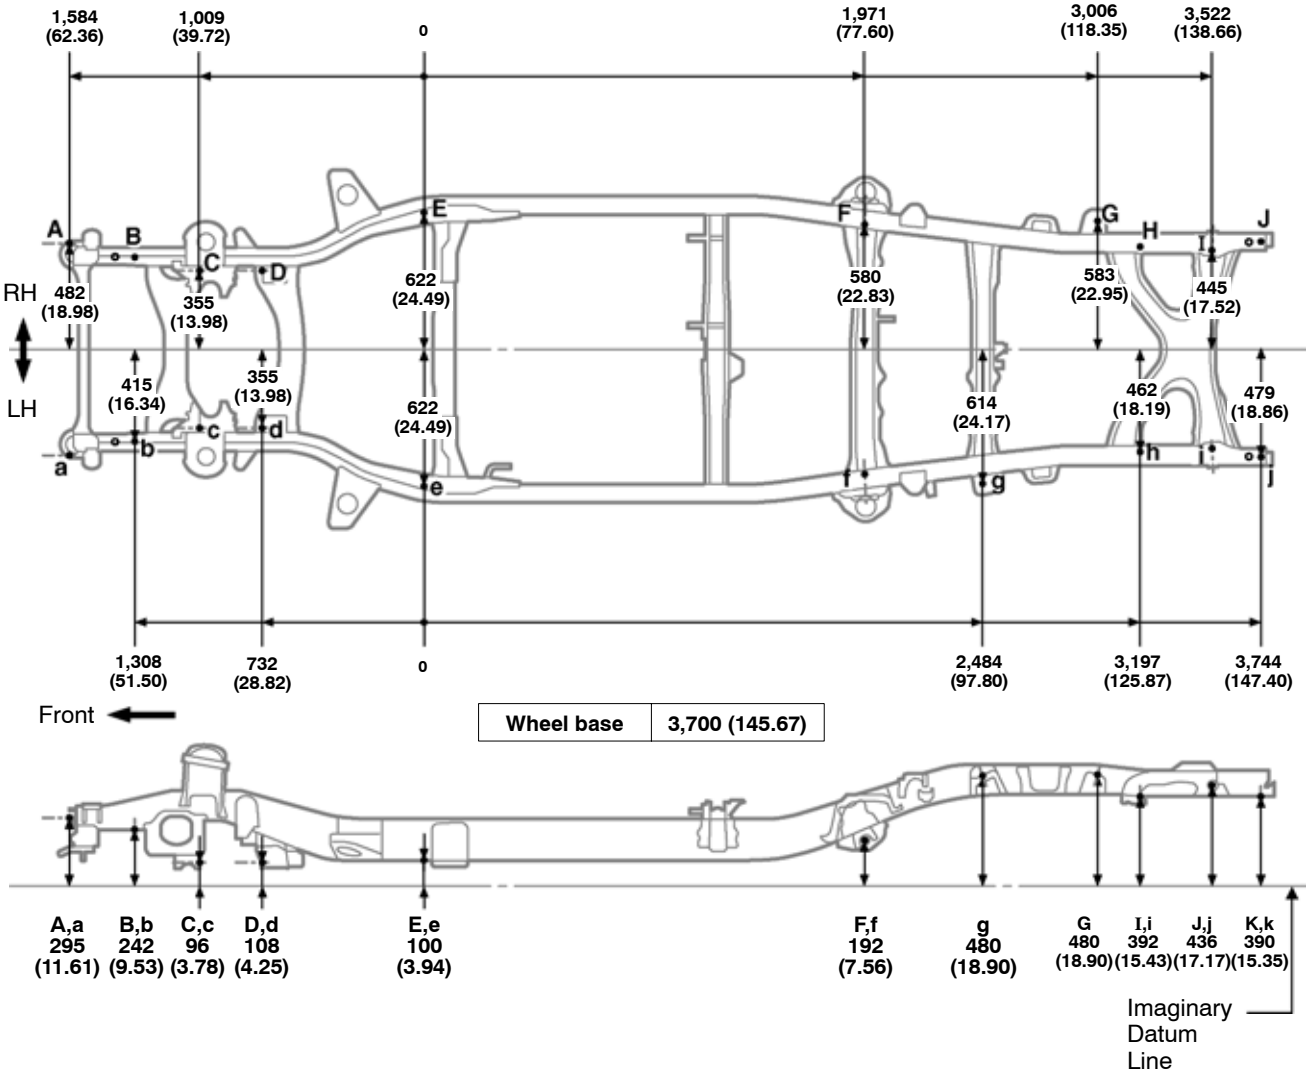

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.				
A, a	Bumper reinforcement installation bolt	M10 (0.39)	F, f	Rear spring front hanger hole-inner	ø14.3 (0.563)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Rear shock absorber installation hole	ø28 (1.18)
C, c	Suspension lower arm installation hole	42 x 24 (1.65 x 0.94)	H, h	Frame rear crossmember installation assembly hole	ø8 (0.31)
D, d	Suspension lower arm installation hole	36.5 x 18.5 (1.437 x 0.728)	I, i	Spring shackle installation hole-inner	ø40 (1.57)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Rear frame rail No. 3 patch installation hole	ø13 (0.51)
—	—	—	—	—	—