WHEEL ALIGNMENT STANDARD

1. FRONT WHEEL ALIGNMENT

(a) Standard vehicle height:


for Regular Cab of Standard Deck:

Vehicle model	Tire size	Front A - B	Rear C - D
GSK50L-TRADKA	P255/70R18 8J (STD)	112.5 mm (4.43 in.)	-50.3 mm (-1.98 in.)
	P275/65R18 8J (OPT)		-50.2 mm (-1.98 in.)
UCK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	111.9 mm (4.41 in.)	-59.5 mm (-2.34 in.)
	P275/65R18 8J (OFFROAD)	113.0 mm (4.45 in.)	-54.7 mm (-2.15 in.)
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	113.4 mm (4.46 in.)	-59.1 mm (-2.33 in.)
	P275/65R18 8J (OFFROAD)	114.4 mm (4.50 in.)	-54.3 mm (-2.17 in.)
UCK55L-TRADKA	P255/70R18 8J (STD)	98.5 mm (3.88 in.)	-66.9 mm (-2.63 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	98.6 mm (3.88 in.)	66.8 mm (-2.63 in.)
	P275/65R18 8J (OFFROAD)	99.3 mm (3.91 in.)	65.1 mm (-2.56 in.)
USK55L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	99.7 mm (3.88 in.)	-65.7 mm (-2.59 in.)
	P275/65R18 8J (OFFROAD)	100.2 mm (3.94 in.)	-63.8 mm (-2.51 in.)


for Regular Cab of Long Deck:

Vehicle model	Tire size	Front A - B	Rear C - D
GSK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	107.3 mm (4.22 in.)	-52.0 mm (-2.05 in.)
	P255/70R18 8J (MEXICO)	88.6 mm (3.49 in.)	-73.9 mm (-2.91 in.)
UCK51L-THADKA	P255/70R18 8J (STD)	108.2 mm (4.26 in.)	-60.9 mm (-2.40 in.)
	P275/65R18 8J (OPT)	108.3 mm (4.26 in.)	
	P255/70R18 8J (MEXICO)	90.8 mm (3.57 in.)	-70.3 mm (-2.77 in.)
USK51L-THTDKA	P255/70R18 8J (STD)	109.6 mm (4.31 in.)	-60.8 mm (-2.39 in.)
	P275/65R18 8J (OPT)	109.7 mm (4.32 in.)	
UCK56L-THADKA	P255/70R18 8J (STD)	94.9 mm (3.74 in.)	69.2 mm (-2.72 in.)
	P275/65R18 8J (OPT)		-69.1 mm (-2.72 in.)
	P255/70R18 8J (MEXICO)	91.1 mm (3.59 in.)	-69.4 mm (-2.73 in.)
USK56L-THTDKA	P255/70R18 8J (STD)	96.0 mm (3.78 in.)	-68.5 mm (-2.70 in.)
	P275/65R18 8J (OPT)		-68.4 mm (-2.69 in.)

Front Side:

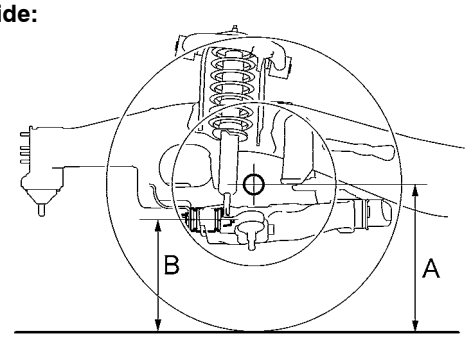

Rear Side:

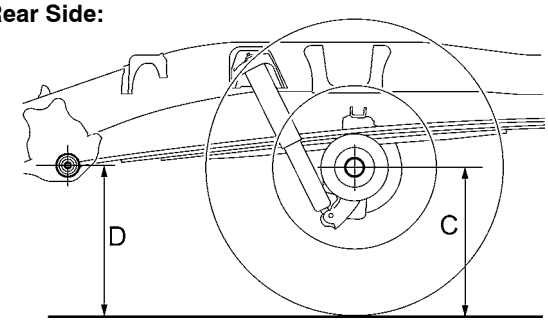

C155993

Measuring points:

A: Ground clearance of the front drive shaft center.

B: Ground clearance of the front adjusting cam bolt center.

C: Ground clearance of the rear axle shaft center.

D: Ground clearance of the leaf spring front side bushing center.

If the vehicle height is not as specified, adjust the height by pressing down on the vehicle.

for Double Cab of Standard Deck:

Vehicle model	Tire size	Front A - B	Rear C - D
GSK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	98.6 mm (3.88 in.)	-54.0 mm (-2.13 in.)
UCK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	99.8 mm (3.93 in.)	-50.9 mm (-2.00 in.)
	P275/65R18 8J (OFFROAD)	101.6 mm (4.00 in.)	-47.2 mm (-1.86 in.)
UCK51L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	99.2 mm (3.91 in.)	-49.5 mm (-1.95 in.)
	P275/65R18 8J (OFFROAD)	101.1 mm (3.98 in.)	-45.7 mm (-1.80 in.)
USK51L-CRTSKA	P275/65R18 8J (OFFROAD)	103.2 mm (4.06 in.)	-47.3 mm (-1.86 in.)
USK51L-CRTLKA	P275/65R18 8J (STD)	100.8 mm (3.97 in.)	-51.6 mm (-2.03 in.)
	P275/55R20 8J (OPT)	102.9 mm (4.05 in.)	-51.1 mm (-2.01 in.)
	P275/65R18 8J (OFFROAD)	100.5 mm (3.96 in.)	-46.9 mm (-1.85 in.)

Vehicle model	Tire size	Front A - B	Rear C - D
UCK56L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	87.9 mm (3.46 in.)	-59.8 mm (-2.35 in.)
	P275/55R20 8J (SPORT)		-59.7 mm (-2.35 in.)
	P275/65R18 8J (OFFROAD)	89.5 mm (3.52 in.)	-58.4 mm (-2.30 in.)
UCK56L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	87.3 mm (3.44 in.)	-54.1 mm (-2.13 in.)
	P275/65R18 8J (OFFROAD)	89.1 mm (3.51 in.)	-56.7 mm (-2.23 in.)
USK56L-CRTSKA	P255/70R18 8J (STD)	88.5 mm (3.48 in.)	-54.1 mm (-2.13 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	88.6 mm (3.49 in.)	-54.0 mm (-2.13 in.)
	P275/65R18 8J (OFFROAD)	90.3 mm (3.56 in.)	56.7 mm (-2.23 in.)
USK56L-CRTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	88.0 mm (3.46 in.)	-53.2 mm (-2.09 in.)
	P275/65R18 8J (OFFROAD)	89.7 mm (3.53 in.)	-55.8 mm (-2.20 in.)

for Double Cab of Long Deck:

Vehicle model	Tire size	Front A - B	Rear C - D
UCK52L-CHASKA	P255/70R18 8J (STD)	99.5 mm (3.92 in.)	-51.3 mm (-2.02 in.)
	P275/65R18 8J (OPT)		-51.2 mm (-2.02 in.)
USK52L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	101.5 mm (4.00 in.)	-52.8 mm (-2.08 in.)
—	—	—	—

Vehicle model	Tire size	Front A - B	Rear C - D
UCK57L-CHASKA	P255/70R18 8J (STD)	86.9 mm (3.42 in.)	-60.3 mm (-2.37 in.)
	P275/65R18 8J (OPT)		-60.2 mm (-2.37 in.)
USK57L-CHTSKA	P255/70R18 8J (STD)	87.6 mm (3.45 in.)	-54.9 mm (-2.16 in.)
	P275/65R18 8J (OPT)		-54.8 mm (-2.16 in.)

for Crew max of standard deck:


Vehicle model	Tire size	Front A - B	Rear C - D
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	102.5 mm (4.04 in.)	-46.1 mm (-1.81 in.)
	P275/65R18 8J (OFFROAD)	103.4 mm (4.07 in.)	-45.4 mm (-1.79 in.)
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	102.0 mm (4.02 in.)	-44.9 mm (-1.77 in.)
	P275/65R18 8J (OFFROAD)	102.9 mm (4.05 in.)	-44.2 mm (-1.74 in.)
USK51L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	104.3 mm (4.11 in.)	-49.6 mm (-1.95 in.)
	P275/65R18 8J (OFFROAD)	104.8 mm (4.13 in.)	-45.0 mm (-1.77 in.)
USK51L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	103.6 mm (4.08 in.)	-48.9 mm (-1.93 in.)
	P275/65R18 8J (OFFROAD)	104.2 mm (4.10 in.)	-44.3 mm (-1.74 in.)
—	—	—	—

Vehicle model	Tire size	Front A - B	Rear C - D
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	90.0 mm (3.54 in.)	-49.8 mm (-1.96 in.)
	P275/65R18 8J (OFFROAD)	91.8 mm (3.61 in.)	-56.5 mm (-2.22 in.)
UCK56L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	89.5 mm (3.52 in.)	-48.7 mm (-1.92 in.)
	P275/65R18 8J (OFFROAD)	91.3 mm (3.59 in.)	-55.3 mm (-2.18 in.)
USK56L-PSTSKA	P255/70R18 8J (STD)	91.5 mm (3.60 in.)	-55.1 mm (-2.17 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)		-55.0 mm (-2.17 in.)
	P275/65R18 8J (OFFROAD)	92.7 mm (3.65 in.)	-55.3 mm (-2.18 in.)
USK56L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	90.9 mm (3.58 in.)	-54.4 mm (-2.14 in.)
	P275/65R18 8J (OFFROAD)	92.2 mm (3.63 in.)	-54.6 mm (-2.15 in.)

(b) Standard toe-in:

for Regular Cab of Standard Deck:

Vehicle Model	Tire size	Front A + B Rear C - D
GSK50L-TRADKA	P255/70R18 8J (STD)	A + B: 0°08' +/-45' (0.13° +/-0.75°) C - D: 1.87 +/-2.0 mm (0.0736 +/-0.079 in.)
	P275/65R18 8J (OPT)	A + B: 0°08' +/-45' (0.13° +/-0.75°) C - D: 1.86 +/-2.0 mm (0.0732 +/-0.08 in.)
UCK50L-TRADKA	P255/70R18 8J (STD)	A + B: 0°10' +/-45' (0.16° +/-0.75°) C - D: 2.25 +/-2.0 mm (0.0885 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°10' +/-45' (0.16° +/-0.75°) C - D: 2.24 +/-2.0 mm (0.0881 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°08' +/-45' (0.13° +/-0.75°) C - D: 1.86 +/-2.0 mm (0.0732 +/-0.08 in.)
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°08' +/-45' (0.13° +/-0.75°) C - D: 1.87 +/-2.0 mm (0.0736 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°07' +/-45' (0.11° +/-0.75°) C - D: 1.51 +/-2.0 mm (0.059 +/-0.08 in.)
UCK55L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°08' +/-45' (0.13° +/-0.75°) C - D: 1.85 +/-2.0 mm (0.072 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°07' +/-45' (0.11° +/-0.75°) C - D: 1.61+/-2.0 mm (0.063 +/-0.08 in.)
USK55L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	A + B: 0°06' +/-45' (0.10° +/-0.75°) C - D: 1.49 +/-2.0 mm (0.058 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°05' +/-45' (0.09° +/-0.75°) C - D: 1.30 +/-2.0 mm (0.051 +/-0.08 in.)
	P275/55R20 8J (SPORT)	A + B: 0°07' +/-45' (0.11° +/-0.75°) C - D: 1.49 +/-2.0 mm (0.058 +/-0.08 in.)

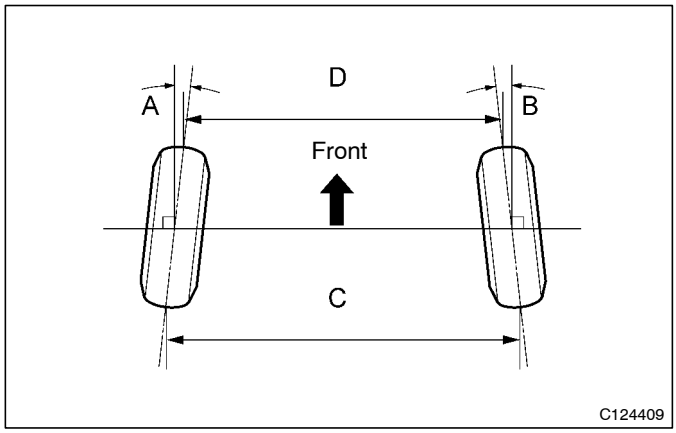

for Regular Cab of Long Deck:

Vehicle Model	Tire size	Front A + B Rear C - D
GSK51L-THADKA	P255/70R18 8J (STD)	A + B: 0°13' +/-45' (0.21° +/-0.75°) C - D: 3.01 +/-2.0 mm (0.1185 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°13' +/-45' (0.21° +/-0.75°) C - D: 3.00 +/-2.0 mm (0.1181 +/-0.08 in.)
	P255/70R18 8J (MEXICO)	A + B: 0°20' +/-45' (0.33° +/-0.75°) C - D: 4.62 +/-2.0 mm (0.181 +/-0.08 in.)
UCK51L-THADKA	P255/70R18 8J (STD)	A + B: 0°13' +/-45' (0.21° +/-0.75°) C - D: 2.95 +/-2.0 mm (0.116 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°13' +/-45' (0.21° +/-0.75°) C - D: 2.94 +/-2.0 mm (0.115 +/-0.08 in.)
	P255/70R18 8J (MEXICO)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C - D: 3.86 +/-2.0 mm (0.1519 +/-0.08 in.)
—	—	—

Vehicle Model	Tire size	Front A + B Rear C - D
USK51L-THTDKA	P255/70R18 8J (STD)	A + B: 0°11' +/-45' (0.18° +/-0.75°) C - D: 2.59 +/-2.0 mm (0.1019 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°11' +/-45' (0.18° +/-0.75°) C - D: 2.58 +/-2.0 mm (0.1015 +/-0.08 in.)
UCK56L-THADKA	P255/70R18 8J (STD)	A + B: 0°11' +/-45' (0.19° +/-0.75°) C - D: 2.69 +/-2.0 mm (0.1059 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°11' +/-45' (0.19° +/-0.75°) C - D: 2.68 +/-2.0 mm (0.1055 +/-0.08 in.)
	P255/70R18 8J (MEXICO)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C - D: 3.81 +/-2.0 mm (0.1513 +/-0.08 in.)
USK56L-THTDKA	P255/70R18 8J (STD)	A + B: 0°10' +/-45' (0.16° +/-0.75°) C - D: 2.34 +/-2.0 mm (0.092 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°10' +/-45' (0.16° +/-0.75°) C - D: 2.33 +/-2.0 mm (0.091 +/-0.08 in.)

for Double Cab of Standard Deck:

Vehicle Model	Tire size	Front A + B Rear C – D
GSK51L-CRASKA	P255/70R18 8J (STD)	A + B: 0°23' +/-45' (0.38° +/-0.75°) C – D: 5.39 +/-2.0 mm (0.212 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°23' +/-45' (0.38° +/-0.75°) C – D: 5.37 +/-2.0 mm (0.211 +/-0.08 in.)
UCK51L-CRASKA	P255/70R18 8J (STD)	A + B: 0°21' +/-45' (0.35° +/-0.75°) C – D: 5.02 +/-2.0 mm (0.197 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°21' +/-45' (0.35° +/-0.75°) C – D: 5.00 +/-2.0 mm (0.196 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.41 +/-2.0 mm (0.173 +/-0.08 in.)
UCK51L-CRALKA	P275/70R18 8J (STD) P275/55R20 8J (OPT)	A + B: 0°22' +/-45' (0.36° +/-0.75°) C – D: 5.11 +/-2.0 mm (0.201 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.52 +/-2.0 mm (0.177 +/-0.08 in.)
USK51L-CRTSKA	P255/70R18 8J (STD)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.56 +/-2.0 mm (0.1795 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.54 +/-2.0 mm (0.178 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°17' +/-45' (0.28° +/-0.75°) C – D: 4.01 +/-2.0 mm (0.157 +/-0.08 in.)
USK51L-CRTLKA	P275/65R18 8J (STD) P275/65R18 8J (OFFROAD)	A + B: 0°20' +/-45' (0.33° +/-0.75°) C – D: 4.71 +/-2.0 mm (0.185 +/-0.08 in.)
	P275/55R20 8J (OPT)	A + B: 0°17' +/-45' (0.29° +/-0.75°) C – D: 4.16 +/-2.0 mm (0.163 +/-0.08 in.)
UCK56L-CRASKA	P255/70R18 8J (STD)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.55 +/-2.0 mm (0.1791 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.54 +/-2.0 mm (0.178 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°17' +/-45' (0.28° +/-0.75°) C – D: 4.05 +/-2.0 mm (0.159 +/-0.08 in.)
UCK56L-CRALKA	P275/65R18 8J (STD)	A + B: 0°19' +/-45' (0.32° +/-0.75°) C – D: 4.60 +/-2.0 mm (0.181 +/-0.08 in.)
	P275/55R20 8J (OPT)	A + B: 0°20' +/-45' (0.33° +/-0.75°) C – D: 4.60 +/-2.0 mm (0.181 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°17' +/-45' (0.29° +/-0.75°) C – D: 4.10 +/-2.0 mm (0.161 +/-0.08 in.)
USK56L-CRTSKA	P255/70R18 8J (STD)	A + B: 0°18' +/-45' (0.30° +/-0.75°) C – D: 4.23 +/-2.0 mm (0.1665 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°18' +/-45' (0.30° +/-0.75°) C – D: 4.22 +/-2.0 mm (0.1661 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C – D: 3.77 +/-2.0 mm (0.148 +/-0.08 in.)
USK56L-CRTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.36 +/-2.0 mm (0.171 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C – D: 3.89 +/-2.0 mm (0.153 +/-0.08 in.)
—	—	—

for Double Cab of Long Deck:

Vehicle Model	Tire size	Front A + B Rear C – D
UCK52L-CHASKA	P255/70R18 8J (STD)	A + B: 0°21' +/-45' (0.35° +/-0.75°) C – D: 4.96 +/-2.0 mm (0.195 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°21' +/-45' (0.35° +/-0.75°) C – D: 4.94 +/-2.0 mm (0.194 +/-0.08 in.)
USK52L-CHTSKA	P255/70R18 8J (STD)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.45 +/-2.0 mm (0.175 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.43 +/-2.0 mm (0.1744 +/-0.08 in.)
UCK57L-CHASKA	P255/70R18 8J (STD)	A + B: 0°20' +/-45' (0.33° +/-0.75°) C – D: 4.73 +/-2.0 mm (0.186 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°20' +/-45' (0.33° +/-0.75°) C – D: 4.72 +/-2.0 mm (0.185 +/-0.08 in.)
USK57L-CHTSKA	P255/70R18 8J (STD)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.42 +/-2.0 mm (0.1740 +/-0.08 in.)
	P275/65R18 8J (OPT)	A + B: 0°19' +/-45' (0.31° +/-0.75°) C – D: 4.40 +/-2.0 mm (0.173 +/-0.08 in.)

for Crew max of standard deck:

Vehicle Model	Tire size	Front A + B Rear C – D
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO)	A + B: 0°17' +/-45' (0.29° +/-0.75°) C – D: 4.17 +/-2.0 mm (0.164 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°17' +/-45' (0.29° +/-0.75°) C – D: 4.15 +/-2.0 mm (0.163 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C – D: 3.89 +/-2.0 mm (0.1531 +/-0.08 in.)
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	A + B: 0°18' +/-45' (0.30° +/-0.75°) C – D: 4.26 +/-2.0 mm (0.167 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°17' +/-45' (0.28° +/-0.75°) C – D: 3.99 +/-2.0 mm (0.157 +/-0.08 in.)
USK51L-PSTSKA	P255/70R18 8J (STD)	A + B: 0°16' +/-45' (0.26° +/-0.75°) C – D: 3.75 +/-2.0 mm (0.1476 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°16' +/-45' (0.26° +/-0.75°) C – D: 3.74 +/-2.0 mm (0.1472 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°15' +/-45' (0.25° +/-0.75°) C – D: 3.52 +/-2.0 mm (0.138 +/-0.08 in.)
USK51L-PSTLKA	P275/65R18 8J (STD)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C – D: 3.90 +/-2.0 mm (0.1535 +/-0.08 in.)
	P275/55R20 8J (OPT)	A + B: 0°17' +/-45' (0.28° +/-0.75°) C – D: 3.90 +/-2.0 mm (0.1535 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°16' +/-45' (0.26° +/-0.75°) C – D: 3.67 +/-2.0 mm (0.144 +/-0.08 in.)

Vehicle Model	Tire size	Front A + B Rear C – D
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO)	A + B: 0°16' +/-45' (0.26° +/-0.75°) C – D: 3.71 +/-2.0 mm (0.146 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°16' +/-45' (0.26° +/-0.75°) C – D: 3.70 +/-2.0 mm (0.145 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°14' +/-45' (0.23° +/-0.75°) C – D: 3.31 +/-2.0 mm (0.130 +/-0.08 in.)
UCK56L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	A + B: 0°16' +/-45' (0.27° +/-0.75°) C – D: 3.81 +/-2.0 mm (0.149 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°14' +/-45' (0.24° +/-0.75°) C – D: 3.41 +/-2.0 mm (0.134 +/-0.08 in.)
USK56L-PSTSKA	P255/70R18 8J (STD)	A + B: 0°14' +/-45' (0.24° +/-0.75°) C – D: 3.37 +/-2.0 mm (0.1326 +/-0.08 in.)
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	A + B: 0°14' +/-45' (0.24° +/-0.75°) C – D: 3.36 +/-2.0 mm (0.1322 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°13' +/-45' (0.21° +/-0.75°) C – D: 3.00 +/-2.0 mm (0.118 +/-0.08 in.)
USK56L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	A + B: 0°15' +/-45' (0.25° +/-0.75°) C – D: 3.50 +/-2.0 mm (0.137 +/-0.08 in.)
	P275/65R18 8J (OFFROAD)	A + B: 0°13' +/-45' (0.22° +/-0.75°) C – D: 3.13 +/-2.0 mm (0.123 +/-0.08 in.)
—	—	—

(a) Standard wheel angle:

for Regular Cab of Standard Deck:

Vehicle Model	Tire size	Inside wheel angle	Outside wheel angle (reference)
GSK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-38°59' to -41°59' (-38.98° to -41.98°)	36°20' (36.33°)
UCK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°00' to -42°00' (-39.00° to -42.00°)	36°23' (36.38°)
	P275/65R18 8J (OFFROAD)	-38°59' to -41°59' (-38.98° to -41.98°)	36°20' (36.33°)
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-38°59' to -41°59' (-38.98° to -41.98°)	36°20' (36.33°)
	P275/65R18 8J (OFFROAD)	-38°58' to -41°58' (-38.96° to -41.96°)	36°17' (36.29°)
UCK55L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°23' to -42°23' (-39.38° to -42.38°)	36°37' (36.62°)
	P275/65R18 8J (OFFROAD)	-39°22' to -42°22' (-39.37° to -42.37°)	36°36' (36.60°)
USK55L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°22' to -42°22' (-39.36° to -42.36°)	36°35' (36.58°)
	P275/65R18 8J (OFFROAD)	-39°21' to -42°21' (-39.35° to -42.35°)	36°34' (36.57°)

for Regular Cab of Long Deck:

Vehicle Model	Tire size	Inside wheel angle	Outside wheel angle (reference)
GSK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°02' to -42°02' (-39.04° to -42.04°)	36°23' (36.46°)
	P255/70R18 8J (MEXICO)	-39°29' to -42°29' (-39.48° to -42.48°)	36°53' (36.89°)
UCK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°02' to -42°02' (-39.04° to -42.04°)	36°27' (36.45°)
	P255/70R18 8J (MEXICO)	-39°23' to -42°23' (-39.46° to -42.46°)	36°49' (36.82°)
USK51L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°01' to -42°01' (-39.02° to -42.02°)	36°25' (36.41°)
UCK56L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°25' to -42°25' (-39.41° to -42.41°)	36°42' (36.70°)
	P255/70R18 8J (MEXICO)	-39°28' to -42°28' (-39.46° to -42.46°)	36°49' (36.82°)
USK56L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°24' to -42°24' (-39.40° to -42.40°)	36°40' (36.67°)

7for Double Cab of Standard Deck:

Vehicle Model	Tire size	Inside wheel angle	Outside wheel angle (reference)
GSK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°10' to -42°10' (-39.16° to -42.16°)	36°43' (36.71°)
UCK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°08' to -42°08' (-39.14° to -42.14°)	36°40' (36.67°)
	P275/65R18 8J (OFFROAD)	-39°07' to -42°07' (-39.11° to -42.11°)	36°37' (36.61°)
UCK51L-CRALKA	P265/70R18 8J (STD) P275/55R20 8J (OPT)	-39°08' to -42°08' (-39.14° to -42.14°)	36°41' (36.68°)
	P275/65R18 8J (OFFROAD)	-39°07' to -42°07' (-39.12° to -42.12°)	36°37' (36.62°)
USK51L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°07' to -42°07' (-39.12° to -42.12°)	36°37' (36.62°)
	P275/65R18 8J (OFFROAD)	-39°05' to -42°05' (-39.09° to -42.09°)	36°34' (36.57°)
USK51L-CRTLKA	P275/65R18 8J (STD) P275/65R18 8J (OFFROAD)	-39°08' to -42°08' (-39.13° to -42.13°)	36°38' (36.64°)
	P275/55R20 8J (OPT)	-39°06' to -42°06' (-39.10° to -42.10°)	36°35' (36.58°)
UCK56L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°29' to -42°29' (-39.48° to -42.48°)	36°53' (36.89°)
	P275/65R18 8J (OFFROAD)	-39°28' to -42°28' (-39.46° to -42.46°)	36°50' (36.84°)
UCK56L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-39°29' to -42°29' (-39.48° to -42.48°)	36°53' (36.89°)
	P275/65R18 8J (OFFROAD)	-39°28' to -42°28' (-39.47°to -42.47°)	36°50' (36.84°)
USK56L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°28' to -42°28' (-39.47° to -42.47°)	36°52' (36.86°)
	P275/65R18 8J (OFFROAD)	-39°27' to -42°27' (-39.45° to -42.45°)	36°49' (36.81°)
USK56L-CRTLKA	P275/ 65R18 8J (STD) P275/55R20 8J (OPT)	-39°29' to -42°29' (-39.48° to -42.48°)	36°52' (36.87°)
	P275/65R18 8J (OFFROAD)	-39°28' to -42°28' (-39.46° to -42.46°)	36°49' (36.82°)

for Double Cab of Long Deck:

Vehicle Model	Tire size	Inside wheel angle	Outside wheel angle (reference)
UCK52L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°08' to -42°08' (-39.14° to -42.14°)	36°40' (36.67°)
USK52L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°07' to -42°07' (-39.11° to -42.11°)	36°37' (36.61°)
UCK57L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°29' to -42°29' (-39.49° to -42.49°)	36°54' (36.90°)
USK57L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-39°29' to -42°29' (-39.48° to -42.48°)	36°52' (36.87°)


for Crew max of standard deck:

Vehicle Model	Tire size	Inside wheel angle	Outside wheel angle (reference)
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°06' to -42°06' (-39.10° to -42.10°)	36°35' (36.58°)
	P275/65R18 8J (OFFROAD)	-39°05' to -42°05' (-39.09° to -42.09°)	36°33' (36.55°)
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-39°07' to -42°07' (-39.11° to -42.11°)	36°35' (36.59°)
	P275/65R18 8J (OFFROAD)	-39°05' to -42°05' (-39.09° to -42.09°)	36°34' (36.57°)
USK51L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°05' to -42°05' (-39.08° to -42.08°)	36°32' (36.54°)
	P275/65R18 8J (OFFROAD)	-39°04' to -42°04' (-39.07° to -42.07°)	36°31' (36.51°)
USK51L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-39°05' to -42°05' (-39.09° to -42.09°)	36°34' (36.56°)
	P275/65R18 8J (OFFROAD)	-39°05' to -42°05' (-39.08° to -42.08°)	36°32' (36.53°)
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°27' to -42°27' (-39.45° to -42.45°)	36°49' (36.81°)
	P275/65R18 8J (OFFROAD)	-39°26' to -42°26' (-39.44° to -42.44°)	36°46' (36.77°)
UCK56L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-39°28' to -42°28' (-39.46° to -42.46°)	36°49' (36.82°)
	P275/65R18 8J (OFFROAD)	-39°26' to -42°26' (-39.44° to -42.44°)	36°47' (36.78°)
USK56L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-39°26' to -42°26' (-39.44° to -42.44°)	36°46' (36.77°)
	P275/65R18 8J (OFFROAD)	-39°25' to -42°25' (-39.42° to -42.42°)	36°44' (36.74°)
USK56L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-39°26' to -42°26' (-39.44° to -42.44°)	36°47' (36.79°)
	P275/65R18 8J (OFFROAD)	-39°26' to -42°26' (-39.43° to -42.43°)	36°45' (36.75°)

(c) Standard camber inclination:

for Regular Cab of Standard Deck:

Vehicle Model	Tire Size	Camber Inclination
GSK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-0°11' +/-45' (-0.19° +/-0.75°) 30' (0.50°) or less
UCK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-0°10' +/-45' (-0.16° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°11' +/-45' (-0.19° +/-0.75°) 30' (0.50°) or less
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-0°11' +/-45' (-0.19° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°13' +/-45' (-0.22° +/-0.75°) 30' (0.50°) or less
UCK55L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°08' +/-45' (0.13° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°07' +/-45' (0.11° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°02' +/-45' (-0.03° +/-0.75°) 30' (0.50°) or less
USK55L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°06' +/-45' (0.10° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°05' +/-45' (0.09° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°01' +/-45' (-0.02° +/-0.75°) 30' (0.50°) or less

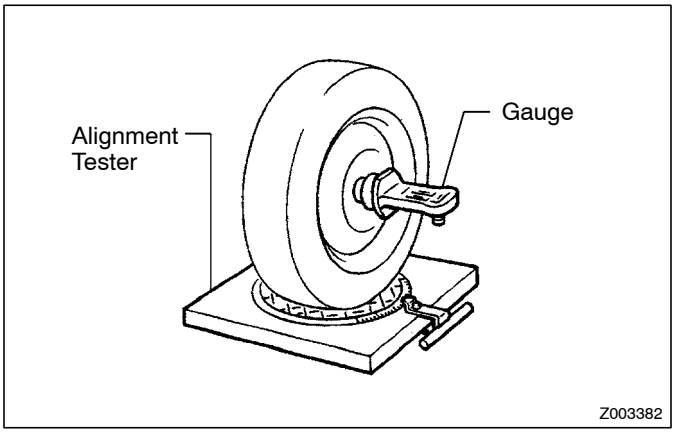

for Regular Cab of Long Deck:

Vehicle Model	Tire Size	Camber Inclination
GSK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-0°06' +/-45' (-0.10° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	0°18' +/-45' (0.30° +/-0.75°) 30' (0.50°) or less
UCK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-0°06' +/-45' (-0.10° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	0°15' +/-45' (0.25° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Camber Inclination
USK51L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	-0°08' +/-45' (-0.13° +/-0.75°) 30' (0.50°) or less
UCK56L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°11' +/-45' (0.18° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	0°15' +/-45' (0.25° +/-0.75°) 30' (0.50°) or less
USK56L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°10' +/-45' (0.16° +/-0.75°) 30' (0.50°) or less

for Double Cab of Standard Deck:

Vehicle Model	Tire Size	Camber Inclination
GSK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°04' +/-45' (0.07° +/-0.75°) 30' (0.50°) or less
UCK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	0°03' +/-45' (0.05° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°01' +/-45' (0.01° +/-0.75°) 30' (0.50°) or less
UCK51L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	0°04' +/-45' (0.06° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°01' +/-45' (0.01° +/-0.75°) 30' (0.50°) or less
USK51L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	0°01' +/-45' (0.02° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°01' +/-45' (-0.02° +/-0.75°) 30' (0.50°) or less
USK51L-CRTLKA	P275/65R18 8J (STD) P275/65R18 8J (OFFROAD)	0°02' +/-45' (0.03° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	-0°01' +/-45' (-0.01° +/-0.75°) 30' (0.50°) or less
UCK56L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°17' +/-45' (0.29° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°16' +/-45' (0.27° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°13' +/-45' (-0.21°+/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Camber Inclination
UCK56L-CRALKA	P275/65R18 8J (STD)	0°18' +/-45' (0.30° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	-0°13' +/-45' (-0.21° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°16' +/-45' (0.27° +/-0.75°) 30' (0.50°) or less
USK56L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°17' +/-45' (0.28° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°15' +/-45' (0.25° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°11' +/-45' (-0.18° +/-0.75°) 30' (0.50°) or less
USK56L-CRTLKA	P275/65R18 8J (STD)	0°17' +/-45' (0.28° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	-0°11' +/-45' (-0.19° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°17' +/-45' (0.26° +/-0.75°) 30' (0.50°) or less
—	—	—

for Double Cab of Long Deck:

Vehicle Model	Tire Size	Camber Inclination
UCK52L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°02' +/-45' (0.04° +/-0.75°) 30' (0.50°) or less
USK52L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°01' +/-45' (0.01° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Camber Inclination
UCK57L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°18' +/-45' (0.30° +/-0.75°) 30' (0.50°) or less
USK57L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°17' +/-45' (0.29° +/-0.75°) 30' (0.50°) or less

for Crew max of standard deck:

Vehicle Model	Tire Size	Camber Inclination
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-0°01' +/-45' (-0.01° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°02' +/-45' (-0.03° +/-0.75°) 30' (0.50°) or less
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	0°00' +/-45' (0.00° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°01' +/-45' (-0.02° +/-0.75°) 30' (0.50°) or less
USK51L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	-0°02' +/-45' (-0.04° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°04' +/-45' (-0.06° +/-0.75°) 30' (0.50°) or less
USK51L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	-0°02' +/-45' (-0.03° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	-0°03' +/-45' (-0.05° +/-0.75°) 30' (0.50°) or less
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT)	0°14' +/-45' (0.24° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°13' +/-45' (0.22° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°08' +/-45' (-0.14° +/-0.75°) 30' (0.50°) or less

Vehicle Mode	Tire Size	Camber Inclination
UCK56L-PSALKA	P275/65R18 8J (STD)	0°15' +/-45' (0.25° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	-0°09' +/-45' (-0.15° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°14' +/-45' (0.23° +/-0.75°) 30' (0.50°) or less
USK56L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	0°13' +/-45' (0.22° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°12' +/-45' (0.20° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (SPORT)	-0°07' +/-45' (-0.12° +/-0.75°) 30' (0.50°) or less
USK56L-PSTLKA	P275/65R18 8J (STD)	0°14' +/-45' (0.23° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	-0°08' +/-45' (-0.13° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	0°13' +/-45' (0.21° +/-0.75°) 30' (0.50°) or less
—	—	—

(d) Standard caster inclination:

for Regular Cab of Standard Deck:

Vehicle Model	Tire Size	Caster Inclination
GSK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°46' +/-45' (2.77° +/-0.75°) 30' (0.50°) or less
UCK50L-TRADKA	P255/70R18 8J (STD)	2°32' +/-45' (2.53° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°31' +/-45' (2.52° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°38' +/-45' (2.64° +/-0.75°) 30' (0.50°) or less
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°32' +/-45' (2.54° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°40' +/-45' (2.66° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Caster Inclination
UCK55L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°16' +/-45' (2.27° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°19' +/-45' (2.31° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (STD)	2°19' +/-45' (2.31° +/-0.75°) 30' (0.50°) or less
USK55L-TRTDKA	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°18' +/-45' (2.30° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°21' +/-45' (2.35° +/-0.75°) 30' (0.50°) or less
—	—	—

for Regular cab of long deck:

Vehicle Model	Tire Size	Camber Inclination
GSK51L-THADKA	P255/70R18 8J (STD)	2°56' +/-45' (2.94° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT)	2°56' +/-45' (2.93° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	2°22' +/-45' (2.37° +/-0.75°) 30' (0.50°) or less
UCK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°45' +/-45' (2.75° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	2°26' +/-45' (2.44° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Camber Inclination
USK51L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°46' +/-45' (2.76° +/-0.75°) 30' (0.50°) or less
UCK56L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°27' +/-45' (2.45° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	2°25' +/-45' (2.42° +/-0.75°) 30' (0.50°) or less
USK56L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°29' +/-45' (2.48° +/-0.75°) 30' (0.50°) or less12
—	—	—

for Double Cab of Standard Deck:

Vehicle Model	Tire Size	Caster Inclination
GSK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°51' +/-45' (2.85° +/-0.75°) 30' (0.50°) or less
UCK51L-CRASKA	P255/70R18 8J (STD)	2°55' +/-45' (2.91° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°54' +/-45' (2.90° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°59' +/-45' (2.99° +/-0.75°) 30' (0.50°) or less
UCK51L-CRALKA	P275/70R18 8J (STD) P275/55R20 8J (OPT)	2°56' +/-45' (2.94° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°02' +/-45' (3.03° +/-0.75°) 30' (0.50°) or less
USK51L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°53' +/-45' (2.89° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°00' +/-45' (3.00° +/-0.75°) 30' (0.50°) or less
USK51L-CRTLKA	P275/65R18 8J (STD)	2°54' +/-45' (2.90° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	2°55' +/-45' (2.92° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°00' +/-45' (3.00° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Caster Inclination
UCK56L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°36' +/-45' (2.60° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°38' +/-45' (2.64° +/-0.75°) 30' (0.50°) or less
UCK56L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	2°43' +/-45' (2.71° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°40' +/-45' (2.67° +/-0.75°) 30' (0.50°) or less
USK56L-CRTSKA	P255/70R18 8J (STD) P275/55R20 8J (SPORT)	2°44' +/-45' (2.73° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT)	2°43' +/-45' (2.72° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°41' +/-45' (2.68° +/-0.75°) 30' (0.50°) or less
USK56L-CRTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	2°44' +/-45' (2.74° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°42' +/-45' (2.70° +/-0.75°) 30' (0.50°) or less
—	—	—

for Double Cab of Long Deck:

Vehicle Model	Tire Size	Caster Inclination
UCK52L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	3°02' +/-45' (3.03° +/-0.75°) 30' (0.50°) or less
USK52L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	3°01' +/-45' (3.02° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire Size	Caster Inclination
UCK57L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°43' +/-45' (2.71° +/-0.75°) 30' (0.50°) or less
USK57L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	2°49' +/-45' (2.82° +/-0.75°) 30' (0.50°) or less

for Crew max of standard deck:

Vehicle Model	Tire Size	Caster Inclination
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	3°02' +/-45' (3.03° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°03' +/-45' (3.05° +/-0.75°) 30' (0.50°) or less
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	3°03' +/-45' (3.05° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°04' +/-45' (3.07° +/-0.75°) 30' (0.50°) or less
USK51L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°58' +/-45' (2.97° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	3°04' +/-45' (3.06° +/-0.75°) 30' (0.50°) or less
USK51L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	2°59' +/-45' (2.98° +/-0.75°) 30' (0.50°) or les
	P275/65R18 8J (OFFROAD)	3°05' +/-45' (3.08° +/-0.75°) 30' (0.50°) or less
—	—	—

Vehicle Model	Tire Size	Caster Inclination
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO)	2°50' +/-45' (2.83° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°49' +/-45' (2.82° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°42' +/-45' (2.70° +/-0.75°) 30' (0.50°) or less
UCK56L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	2°51' +/-45' (2.85° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	2°44' +/-45' (2.73° +/-0.75°) 30' (0.50°) or less
USK56L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OFFROAD)	2°44' +/-45' (2.74° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	2°44' +/-45' (2.73° +/-0.75°) 30' (0.50°) or less
USK56L-PSTLKA	P275/65R18 8J (STD)	2°44' +/-45' (2.74° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT) P275/65R18 8J (OFFROAD)	2°45' +/-45' (2.75° +/-0.75°) 30' (0.50°) or less

(d) Standard steering axis:

for Regular Cab of Standard Deck:

Vehicle Model	Tire size	Steering Axis Inclination
GSK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	13°13' +/-45' (13.21° +/-0.75°) 30' (0.50°) or less
UCK50L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	13°11' +/-45' (13.18° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°13' +/-45' (13.21° +/-0.75°) 30' (0.50°) or less
USK50L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	13°13' +/-45' (13.21° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°14' +/-45' (13.24° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire size	Steering Axis Inclination
UCK55L-TRADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°54' +/-45' (12.90° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°55' +/-45' (12.91° +/-0.75°) 30' (0.50°) or less
USK55L-TRTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°55' +/-45' (12.92° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°56' +/-45' (12.93° +/-0.75°) 30' (0.50°) or less
—	—	—

for Regular Cab of Long Deck:

Vehicle Model	Tire size	Steering Axis Inclination
GSK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	13°07' +/-45' (13.11° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	12°43' +/-45' (12.72° +/-0.75°) 30' (0.50°) or less
UCK51L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	13°07' +/-45' (13.12° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	12°46' +/-45' (12.76° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire size	Steering Axis Inclination
USK51L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	13°09' +/-45' (13.15° +/-0.75°) 30' (0.50°) or less
UCK56L-THADKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°50' +/-45' (12.84° +/-0.75°) 30' (0.50°) or less
	P255/70R18 8J (MEXICO)	12°46' +/-45' (12.77° +/-0.75°) 30' (0.50°) or less
USK56L-THTDKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°52' +/-45' (12.86° +/-0.75°) 30' (0.50°) or less

for Double Cab of Standard Deck:

Vehicle Model	Tire size	Steering Axis Inclination
GSK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°56' +/-45' (12.94° +/-0.75°) 30' (0.50°) or less
UCK51L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°58' +/-45' (12.96° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°01' +/-45' (13.01° +/-0.75°) 30' (0.50°) or less
UCK51L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	12°57' +/-45' (12.95° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°00' +/-45' (13.00° +/-0.75°) 30' (0.50°) or less
USK51L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	13°00' +/-45' (13.00° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°02' +/-45' (13.04° +/-0.75°) 30' (0.50°) or less
USK51L-CRTLKA	P275/65R18 8J (STD) P275/65R18 8J (OFFROAD)	12°59' +/-45' (12.98° +/-0.75°) 30' (0.50°) or less
	P275/55R20 8J (OPT)	13°01' +/-45' (13.02° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire size	Steering Axis Inclination
UCK56L-CRASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°43' +/-45' (12.72° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°45' +/-45' (12.75° +/-0.75°) 30' (0.50°) or less
UCK56L-CRALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	12°43' +/-45' (12.72° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°45' +/-45' (12.75° +/-0.75°) 30' (0.50°) or less
USK56L-CRTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°44' +/-45' (12.74° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°46' +/-45' (12.77° +/-0.75°) 30' (0.50°) or less
USK56L-CRTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	12°44' +/-45' (12.73° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°46' +/-45' (12.76° +/-0.75°) 30' (0.50°) or less
—	—	—

for Double Cab of Long Deck:

Vehicle Model	Tire size	Steering Axis Inclination
UCK52L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°58' +/-45' (12.97° +/-0.75°) 30' (0.50°) or less
USK52L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	13°00' +/-45' (13.00° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire size	Steering Axis Inclination
UCK57L-CHASKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°43' +/-45' (12.71° +/-0.75°) 30' (0.50°) or less
USK57L-CHTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT)	12°44' +/-45' (12.73° +/-0.75°) 30' (0.50°) or less

for Crew max of standard deck:

Vehicle Model	Tire size	Steering Axis Inclination
UCK51L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	13°02' +/-45' (13.03° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°03' +/-45' (13.05° +/-0.75°) 30' (0.50°) or less
UCK51L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	13°01' +/-45' (13.02° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°02' +/-45' (13.04° +/-0.75°) 30' (0.50°) or less
USK51L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	13°04' +/-45' (13.06° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°04' +/-45' (13.07° +/-0.75°) 30' (0.50°) or less
USK51L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	13°02' +/-45' (13.04° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	13°04' +/-45' (13.06° +/-0.75°) 30' (0.50°) or less

Vehicle Model	Tire size	Steering Axis Inclination
UCK56L-PSASKA	P255/70R18 8J (STD and MEXICO) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°46' +/-45' (12.77° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°48' +/-45' (12.80° +/-0.75°) 30' (0.50°) or less
UCK56L-PSALKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	12°46' +/-45' (12.76° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°47' +/-45' (12.79° +/-0.75°) 30' (0.50°) or less
USK56L-PSTSKA	P255/70R18 8J (STD) P275/65R18 8J (OPT) P275/55R20 8J (SPORT)	12°47' +/-45' (12.79° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°49' +/-45' (12.82° +/-0.75°) 30' (0.50°) or less
USK56L-PSTLKA	P275/65R18 8J (STD) P275/55R20 8J (OPT)	12°47' +/-45' (12.78° +/-0.75°) 30' (0.50°) or less
	P275/65R18 8J (OFFROAD)	12°49' +/-45' (12.81° +/-0.75°) 30' (0.50°) or less