
COMPONENTS

1. FRONT BUMPER


for Resin Type Bumper:

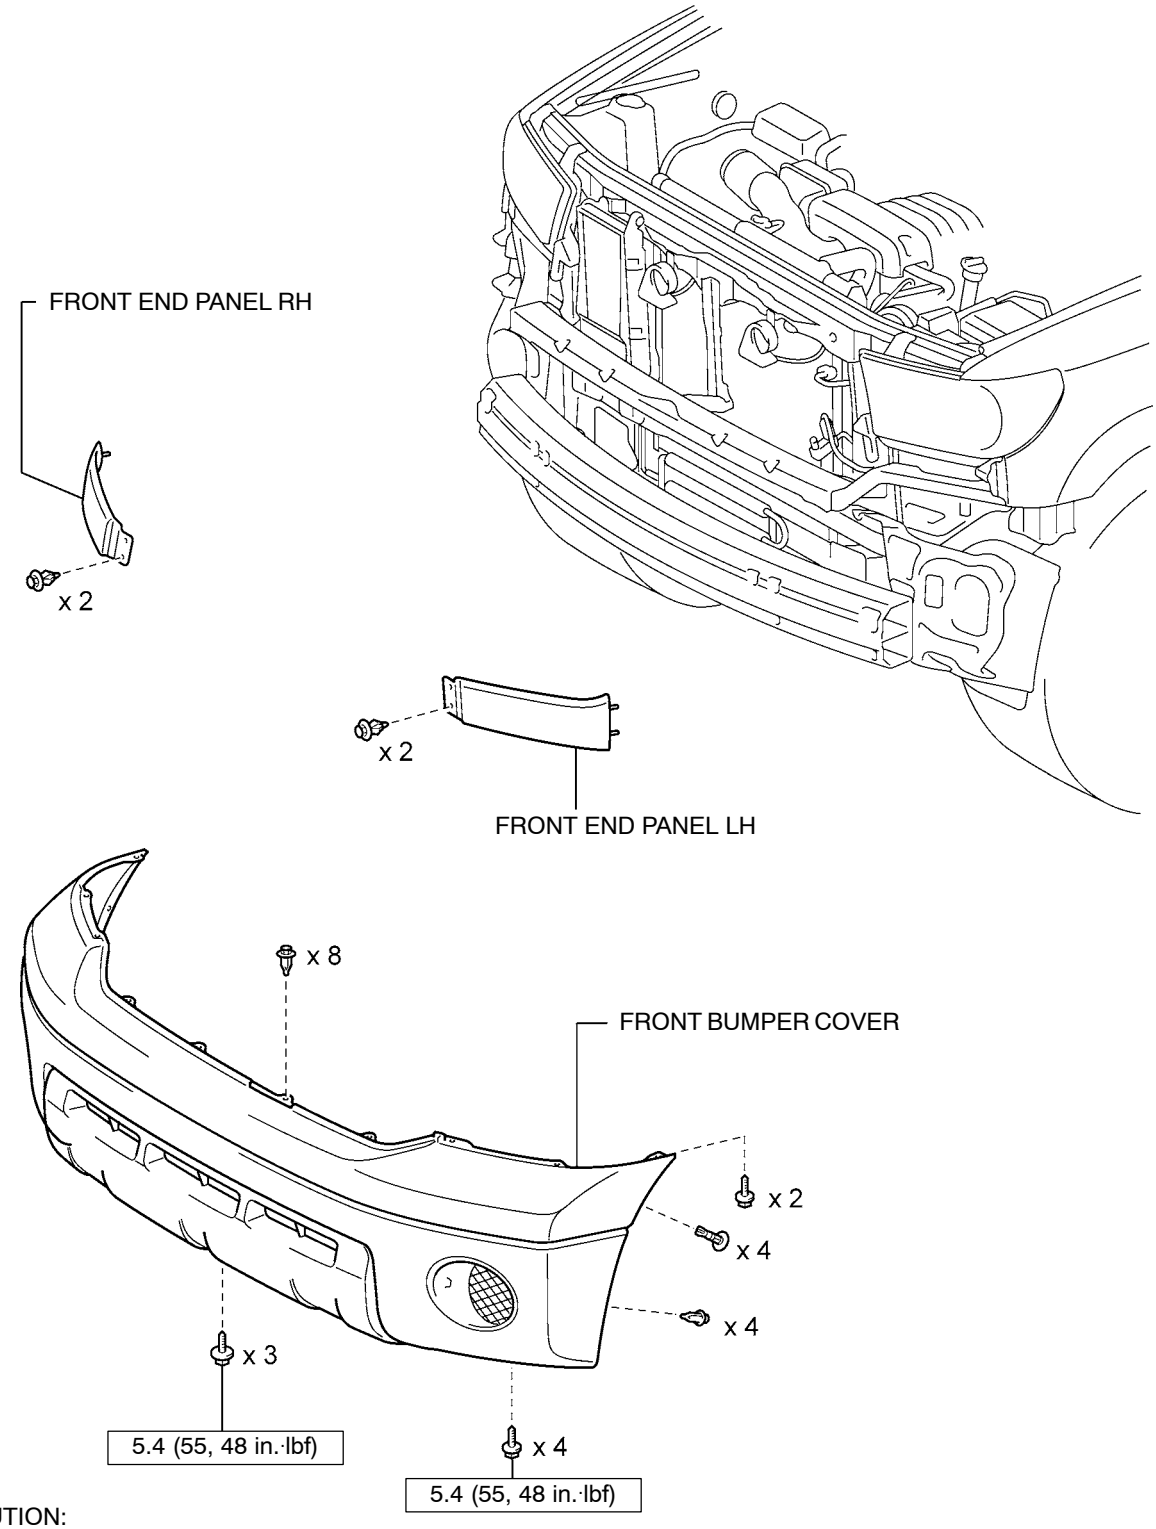

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B165625

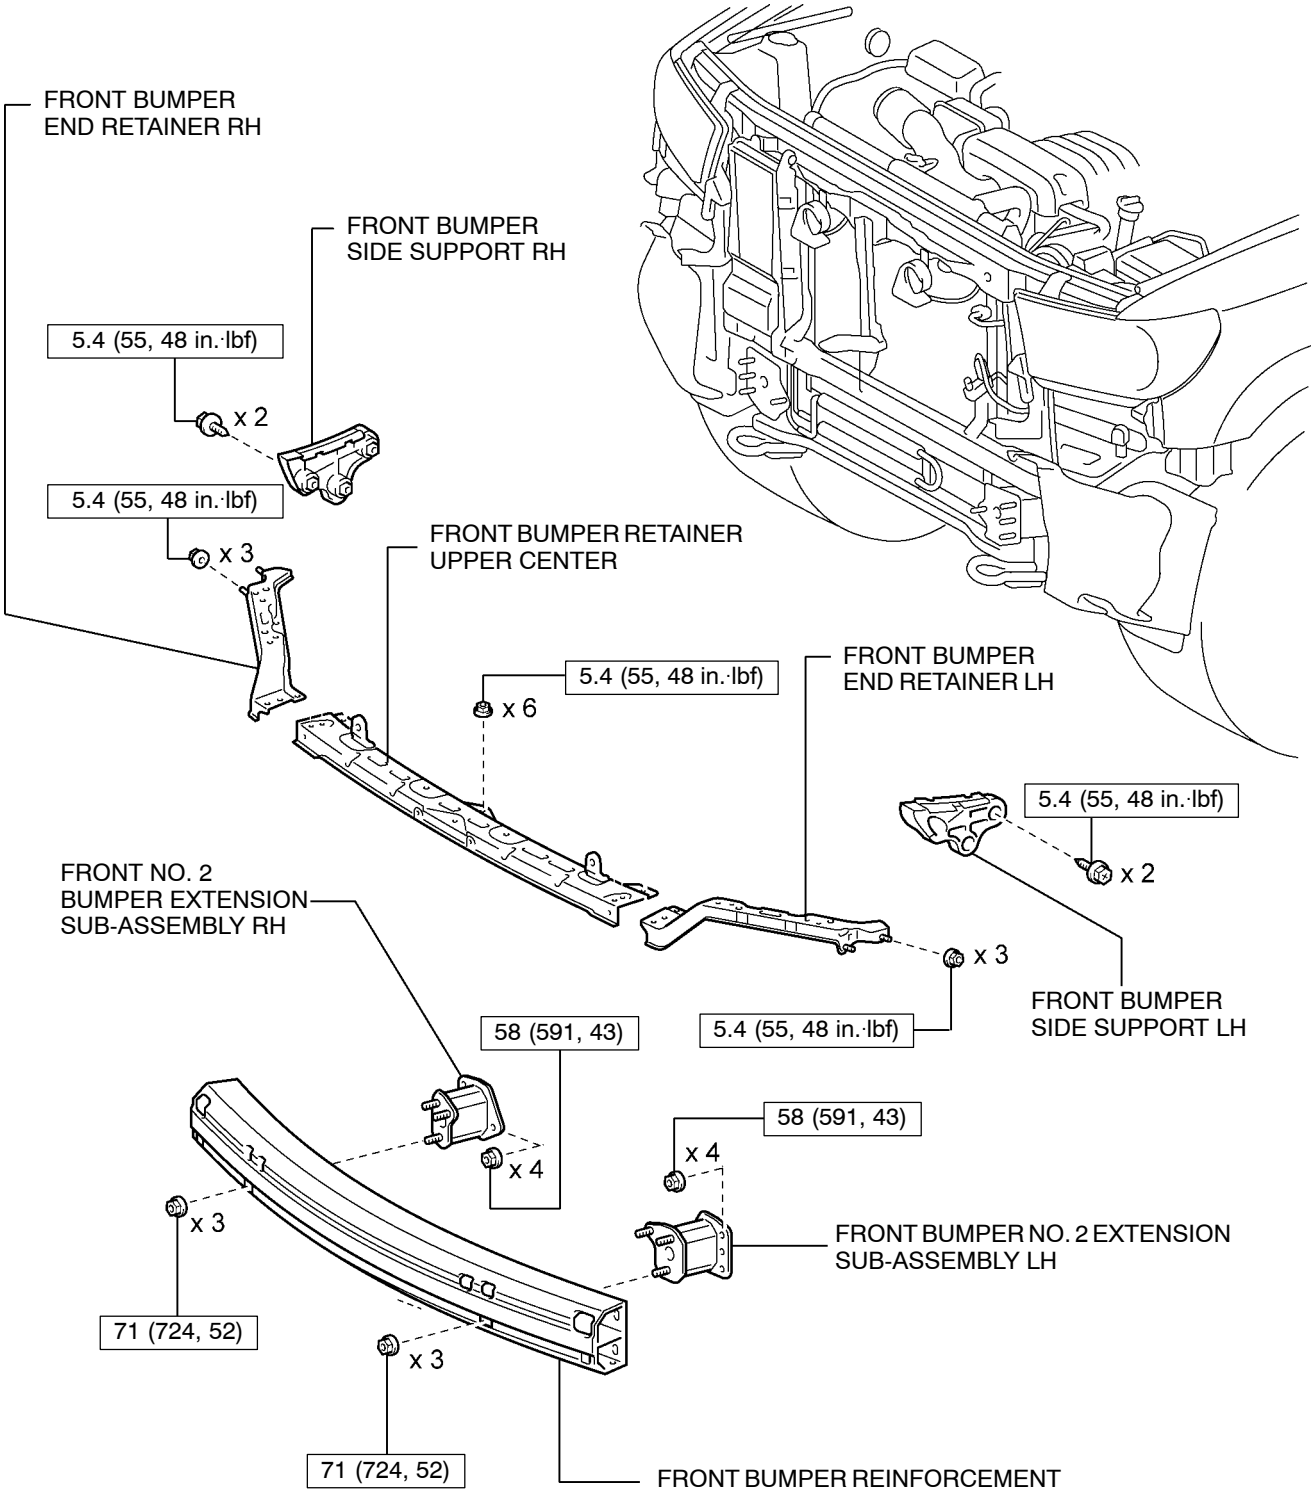


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B165626


for Steel Type Bumper:

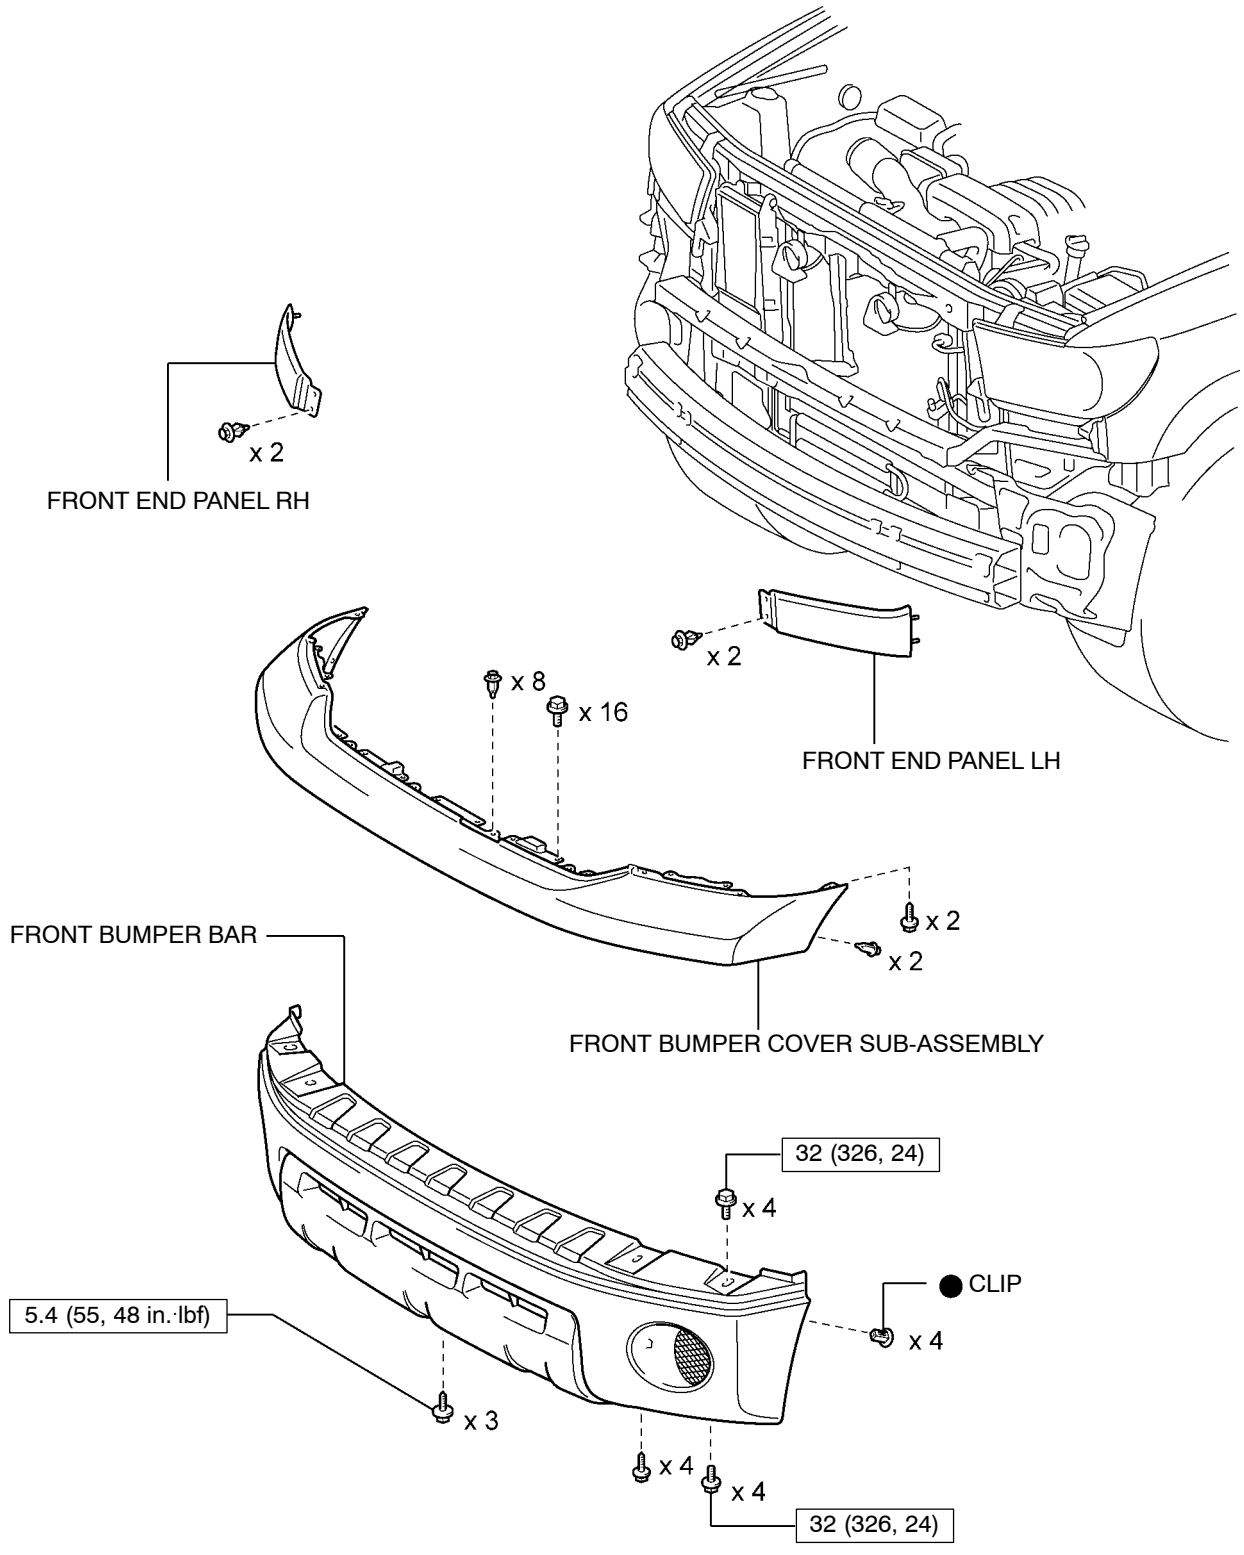

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque ● Non-reusable part

B165491

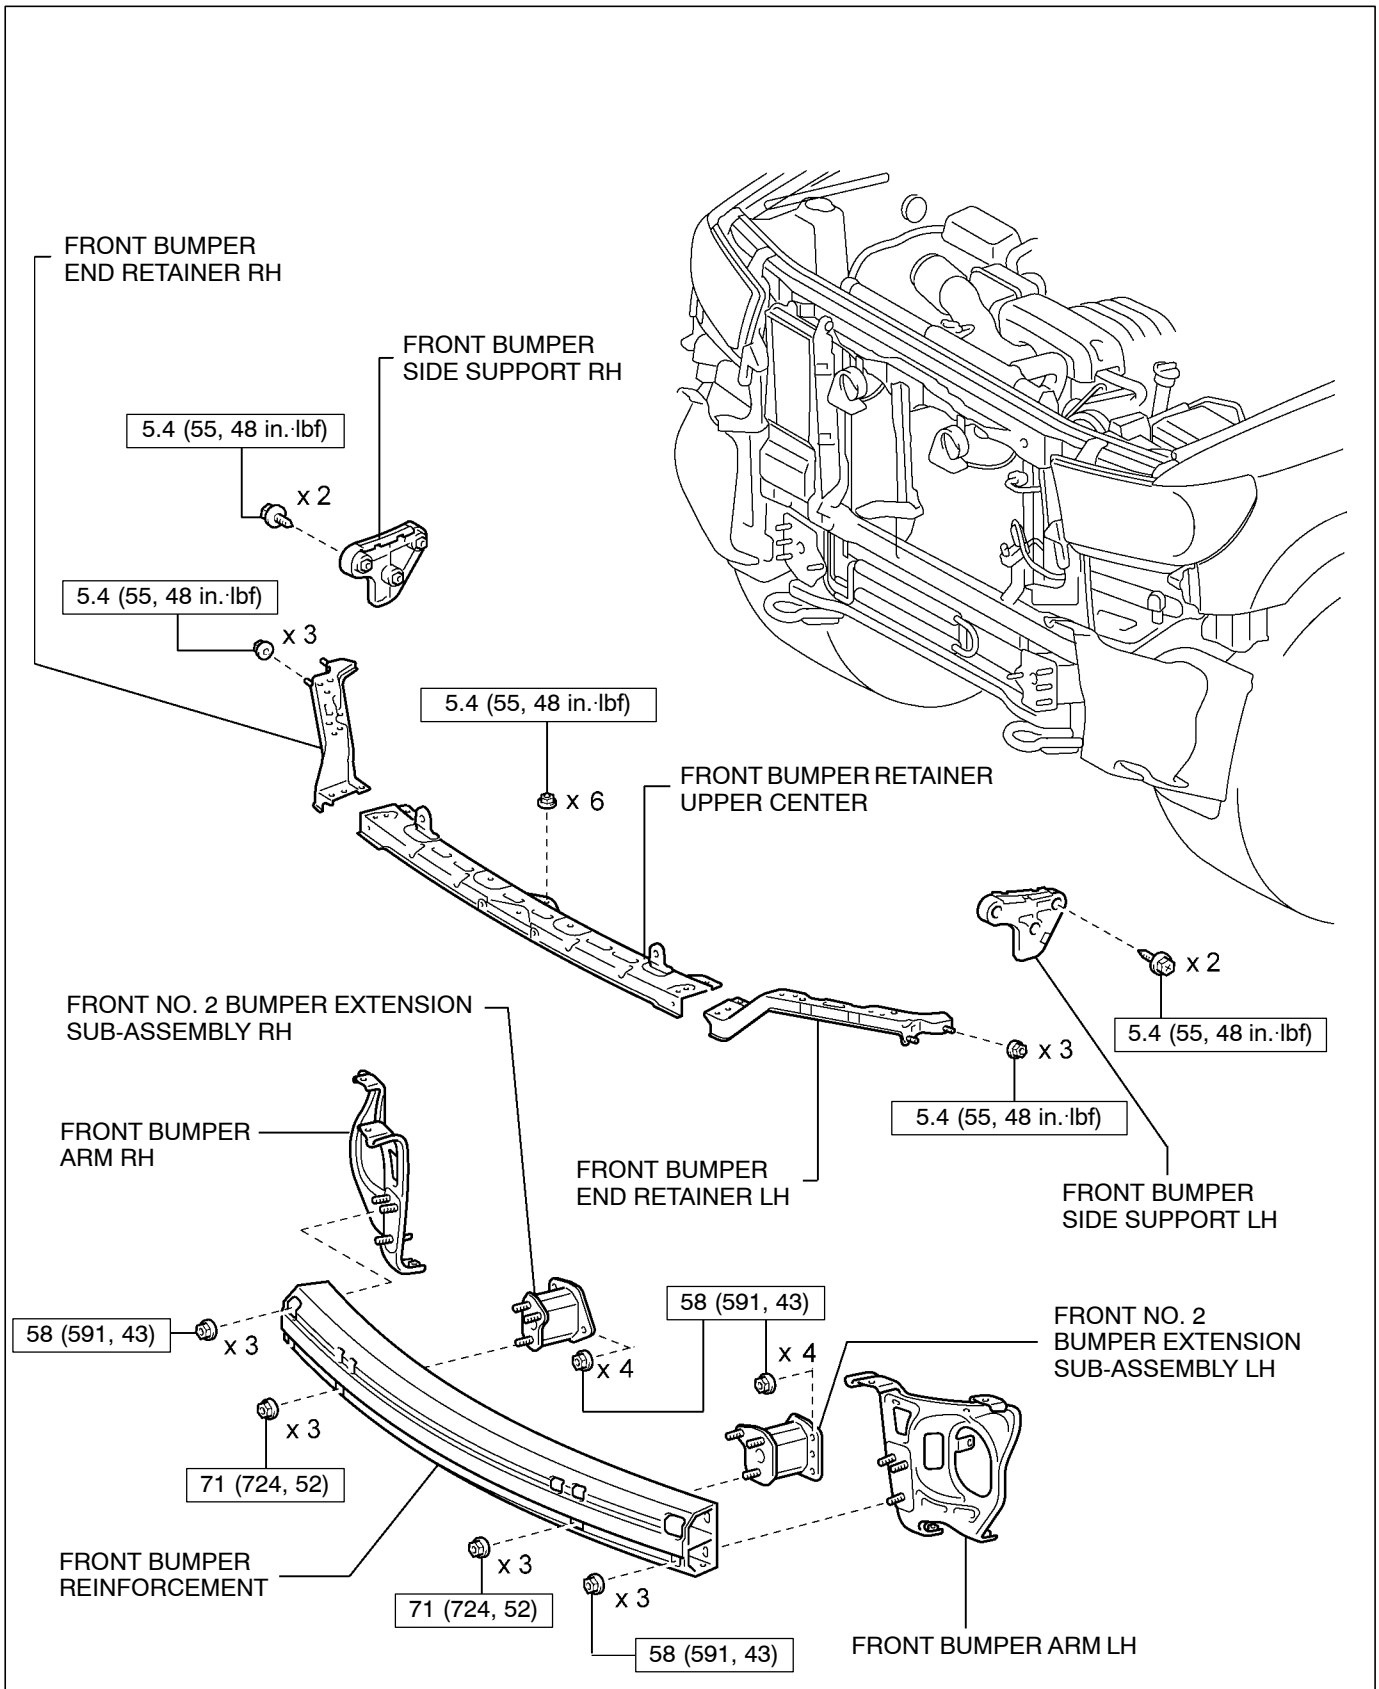


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft.·lbf) : Specified torque

B165493

2. REAR BUMPER

for Resin Type Bumper:

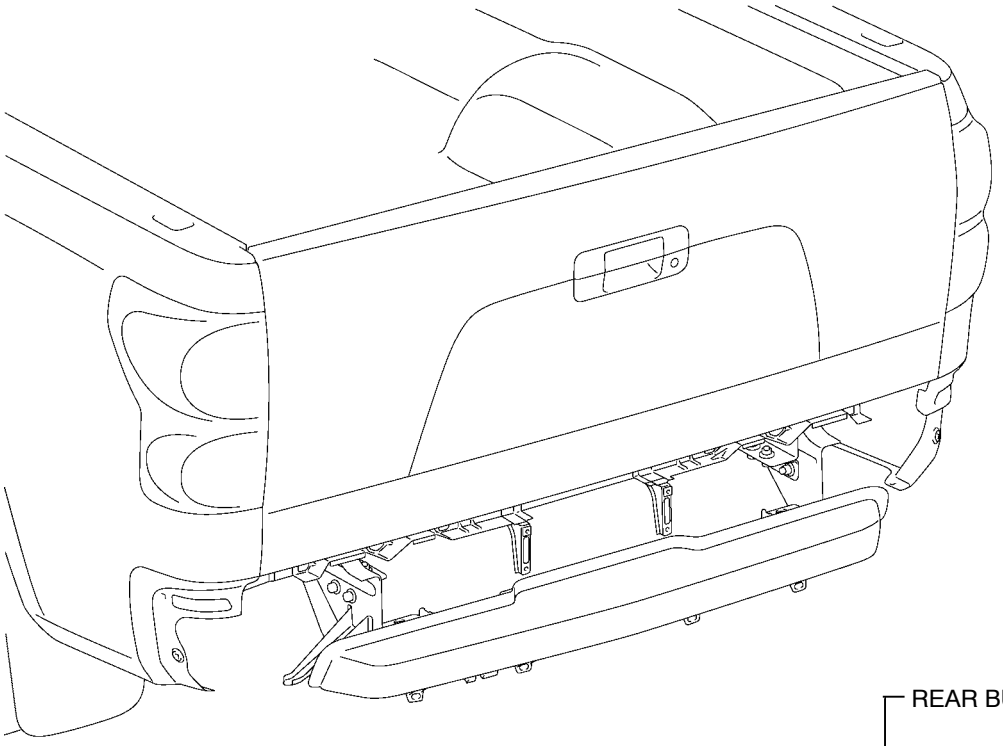


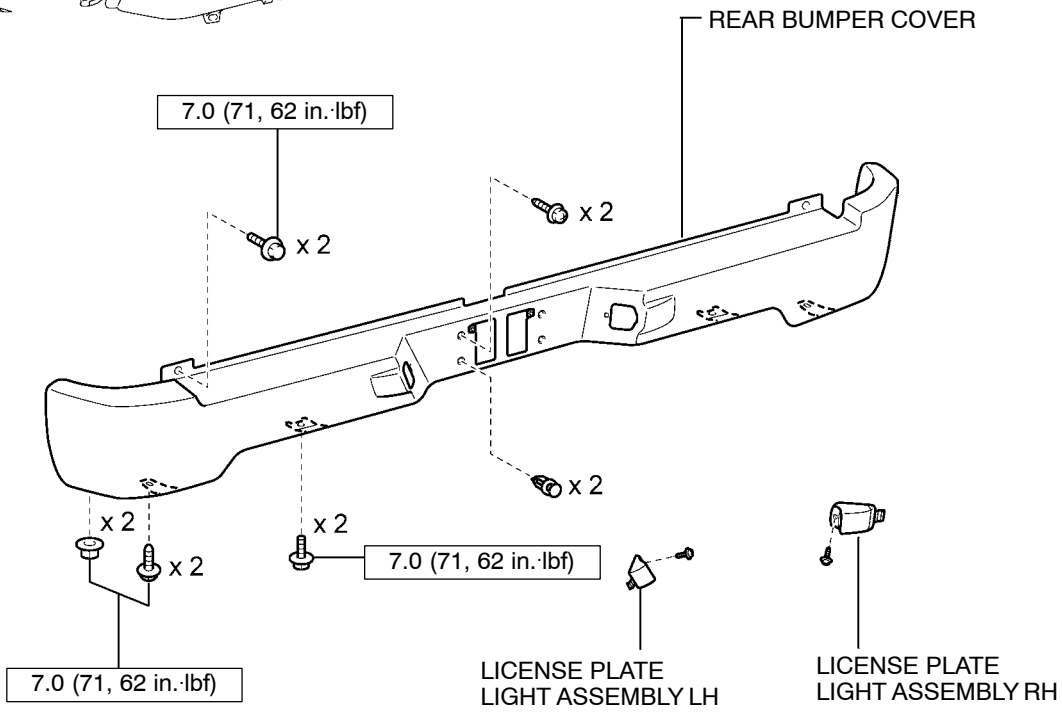

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166098

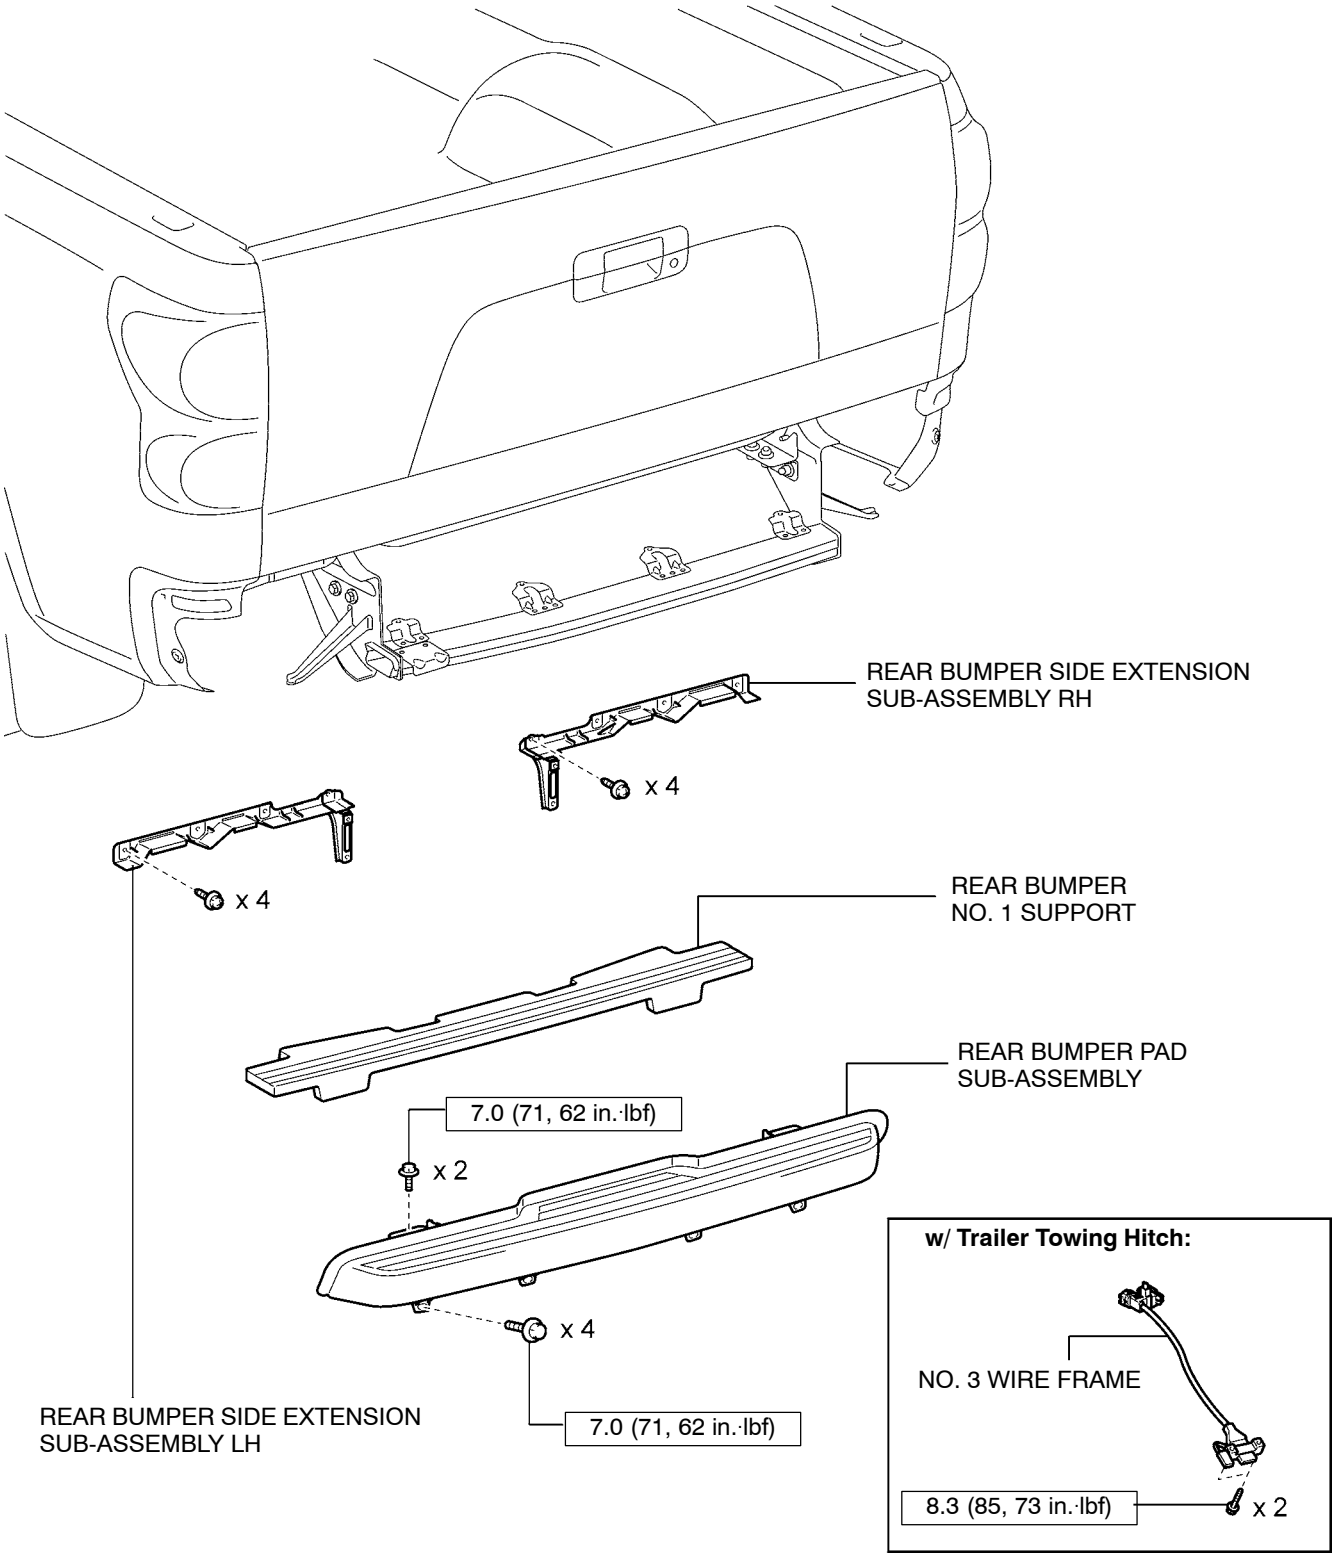


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166099

for Steel Type Bumper:

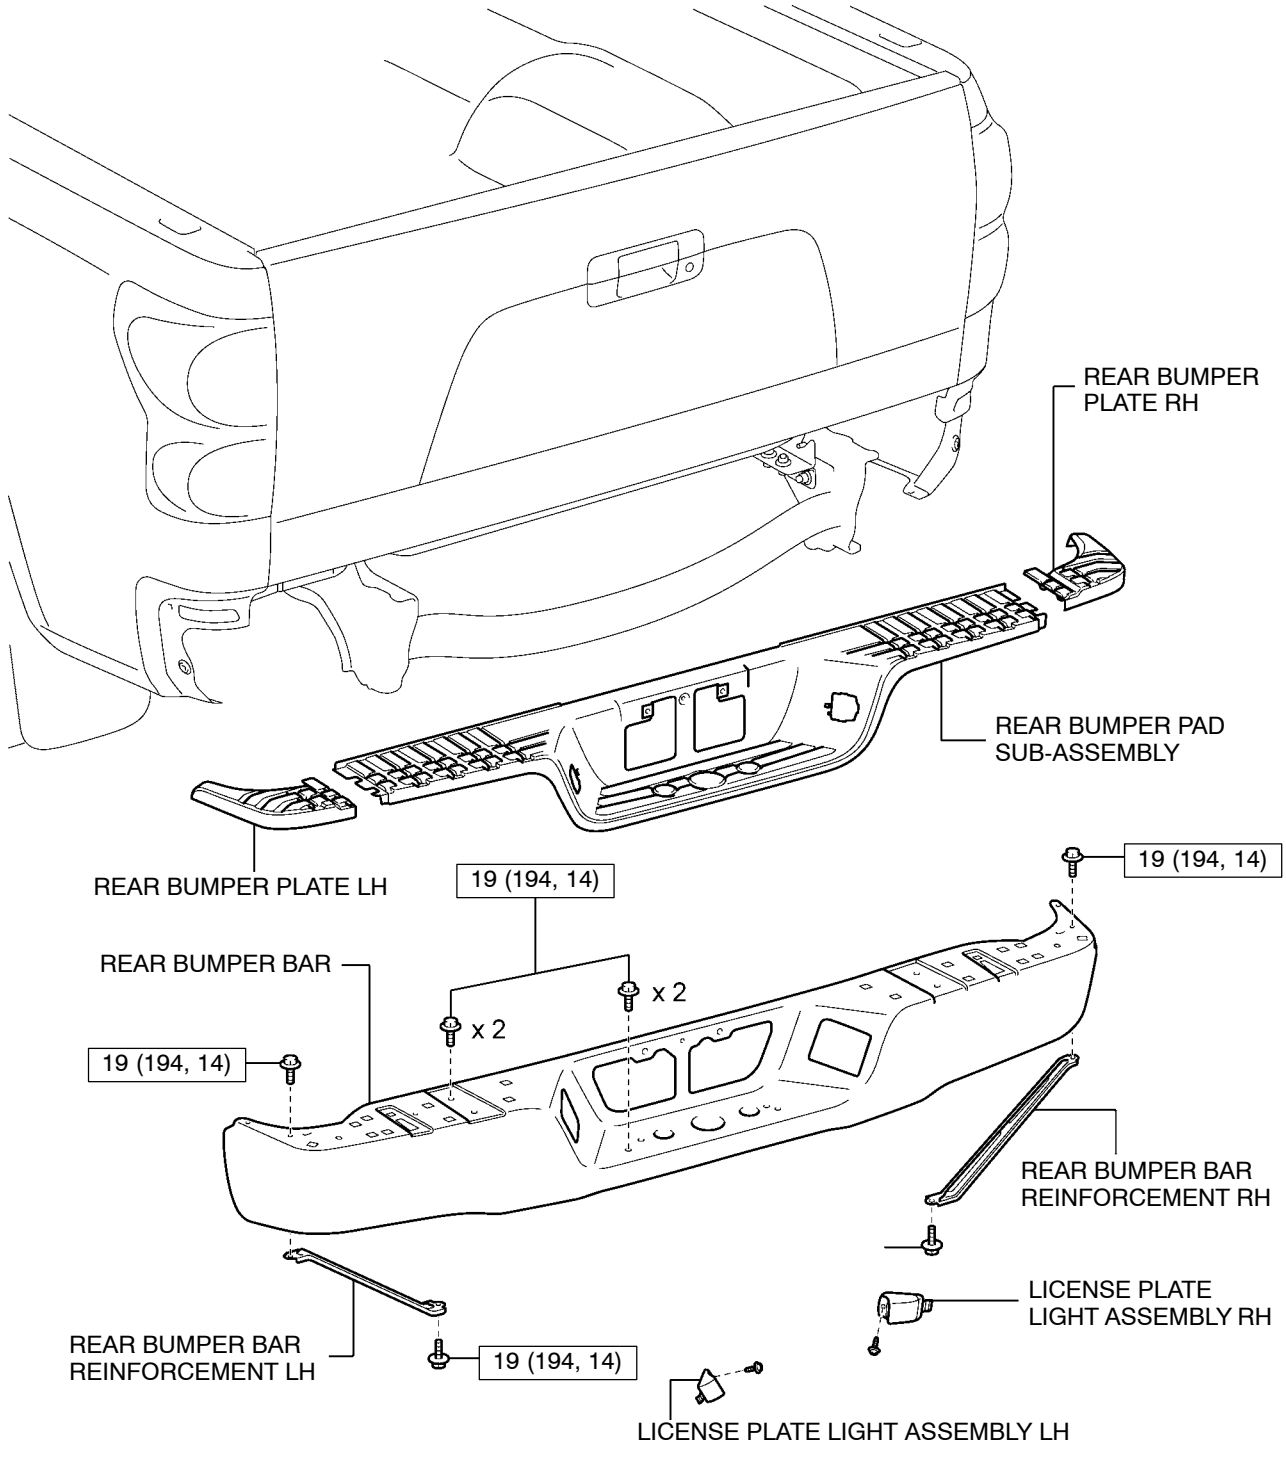



CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166108

3. INSTRUMENT PANEL

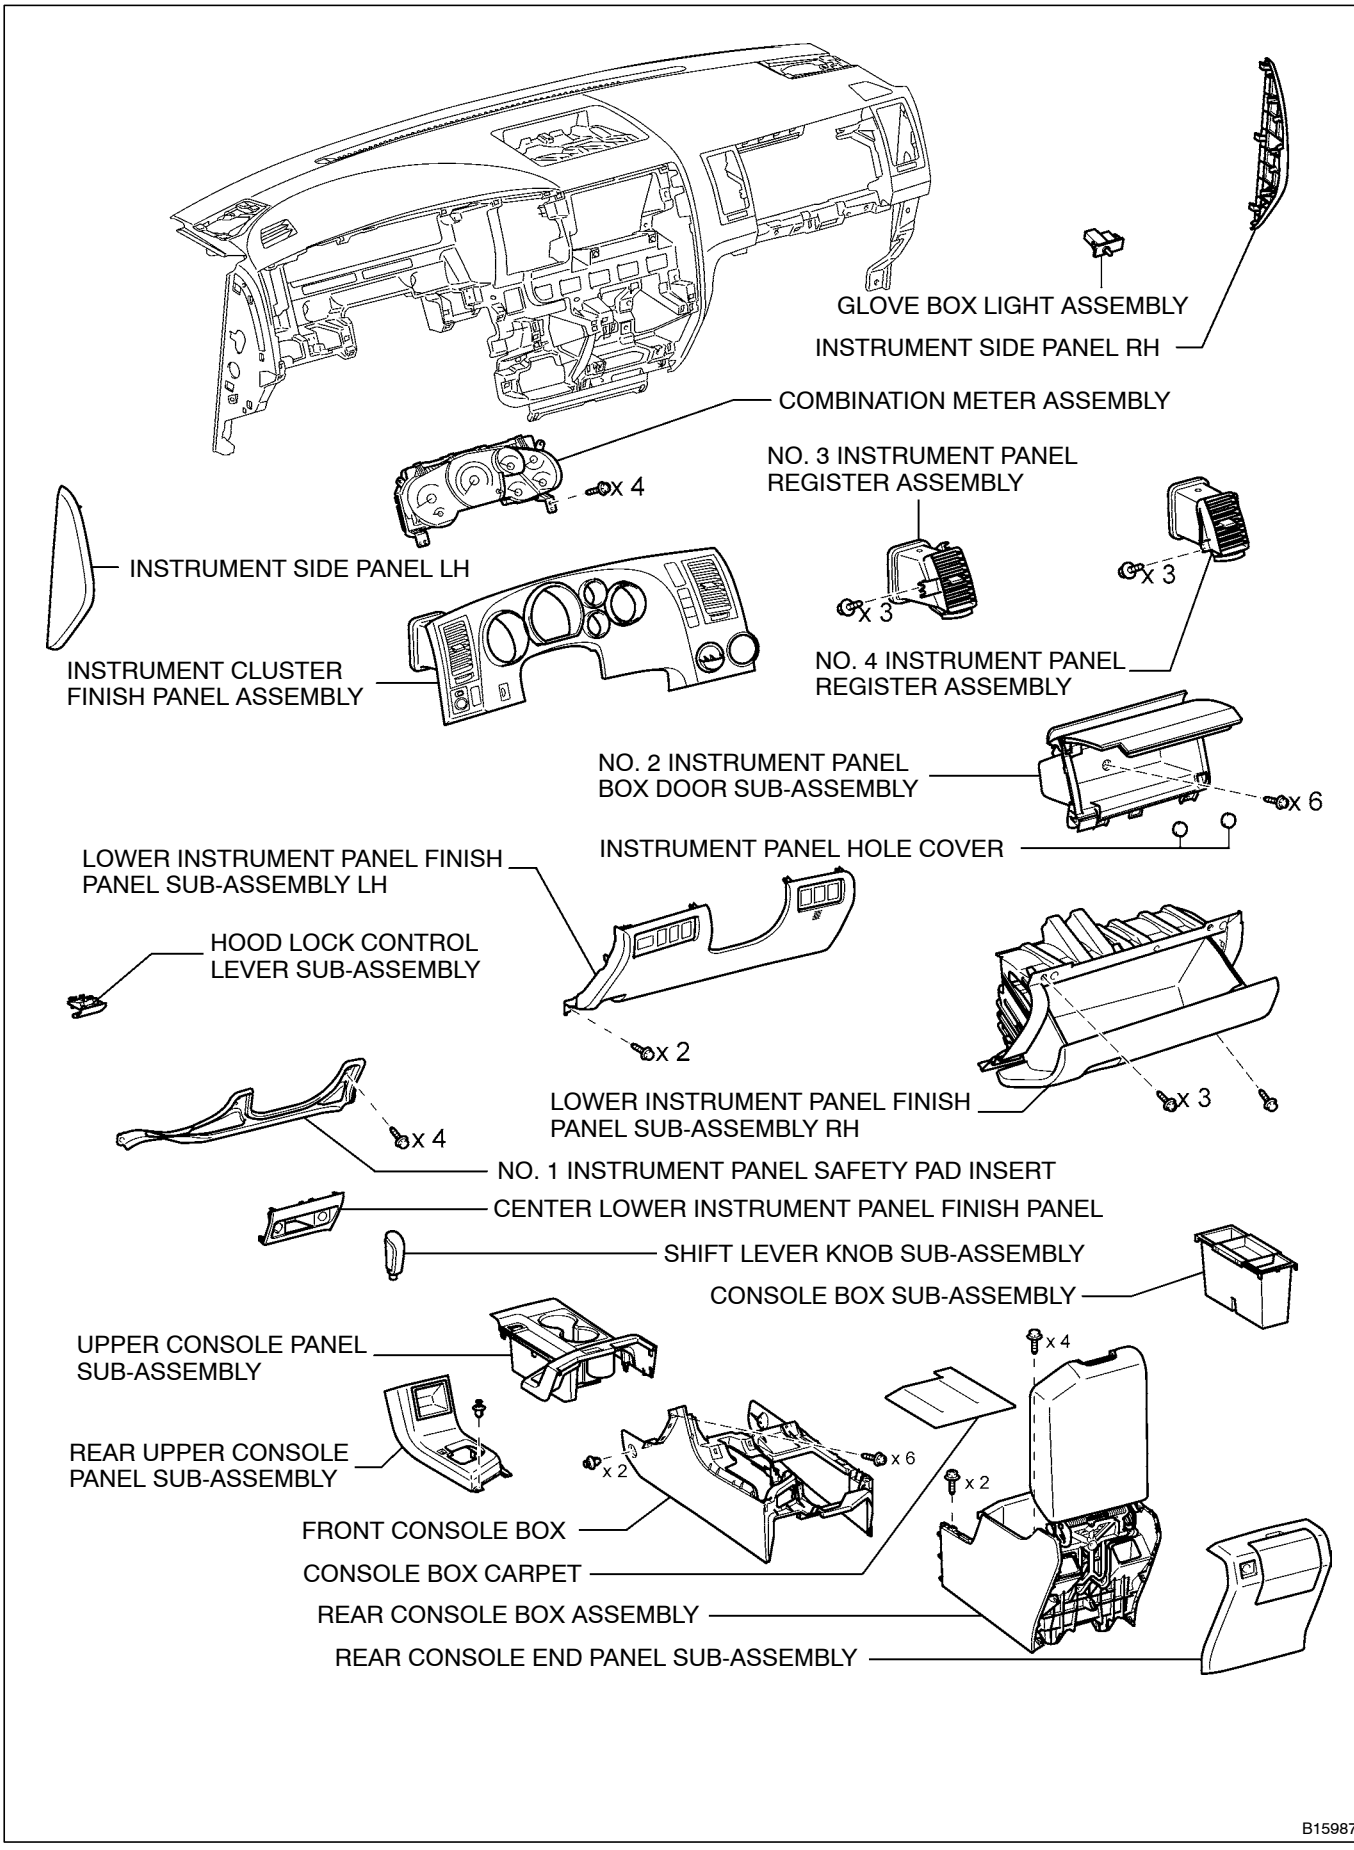


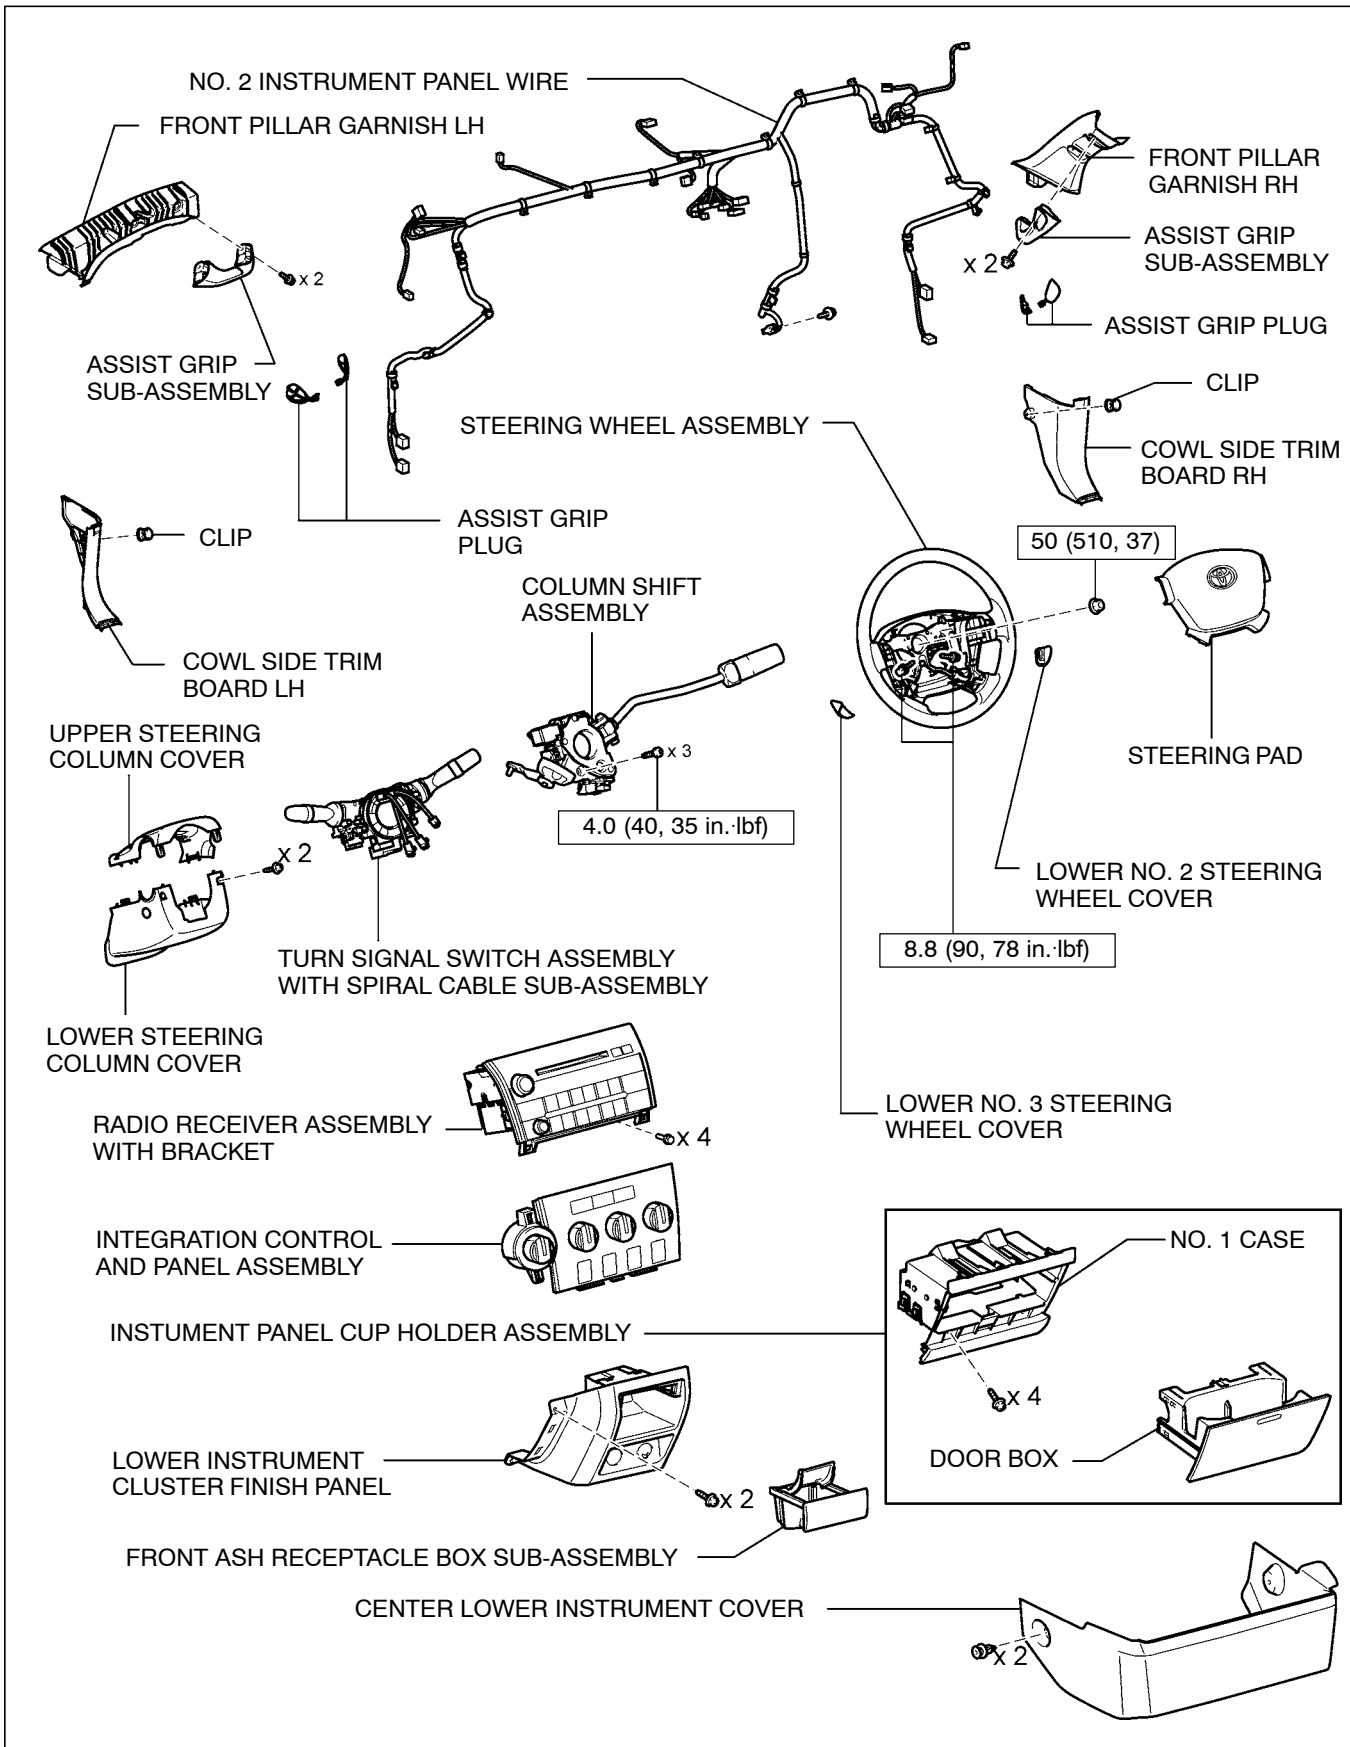

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B163352

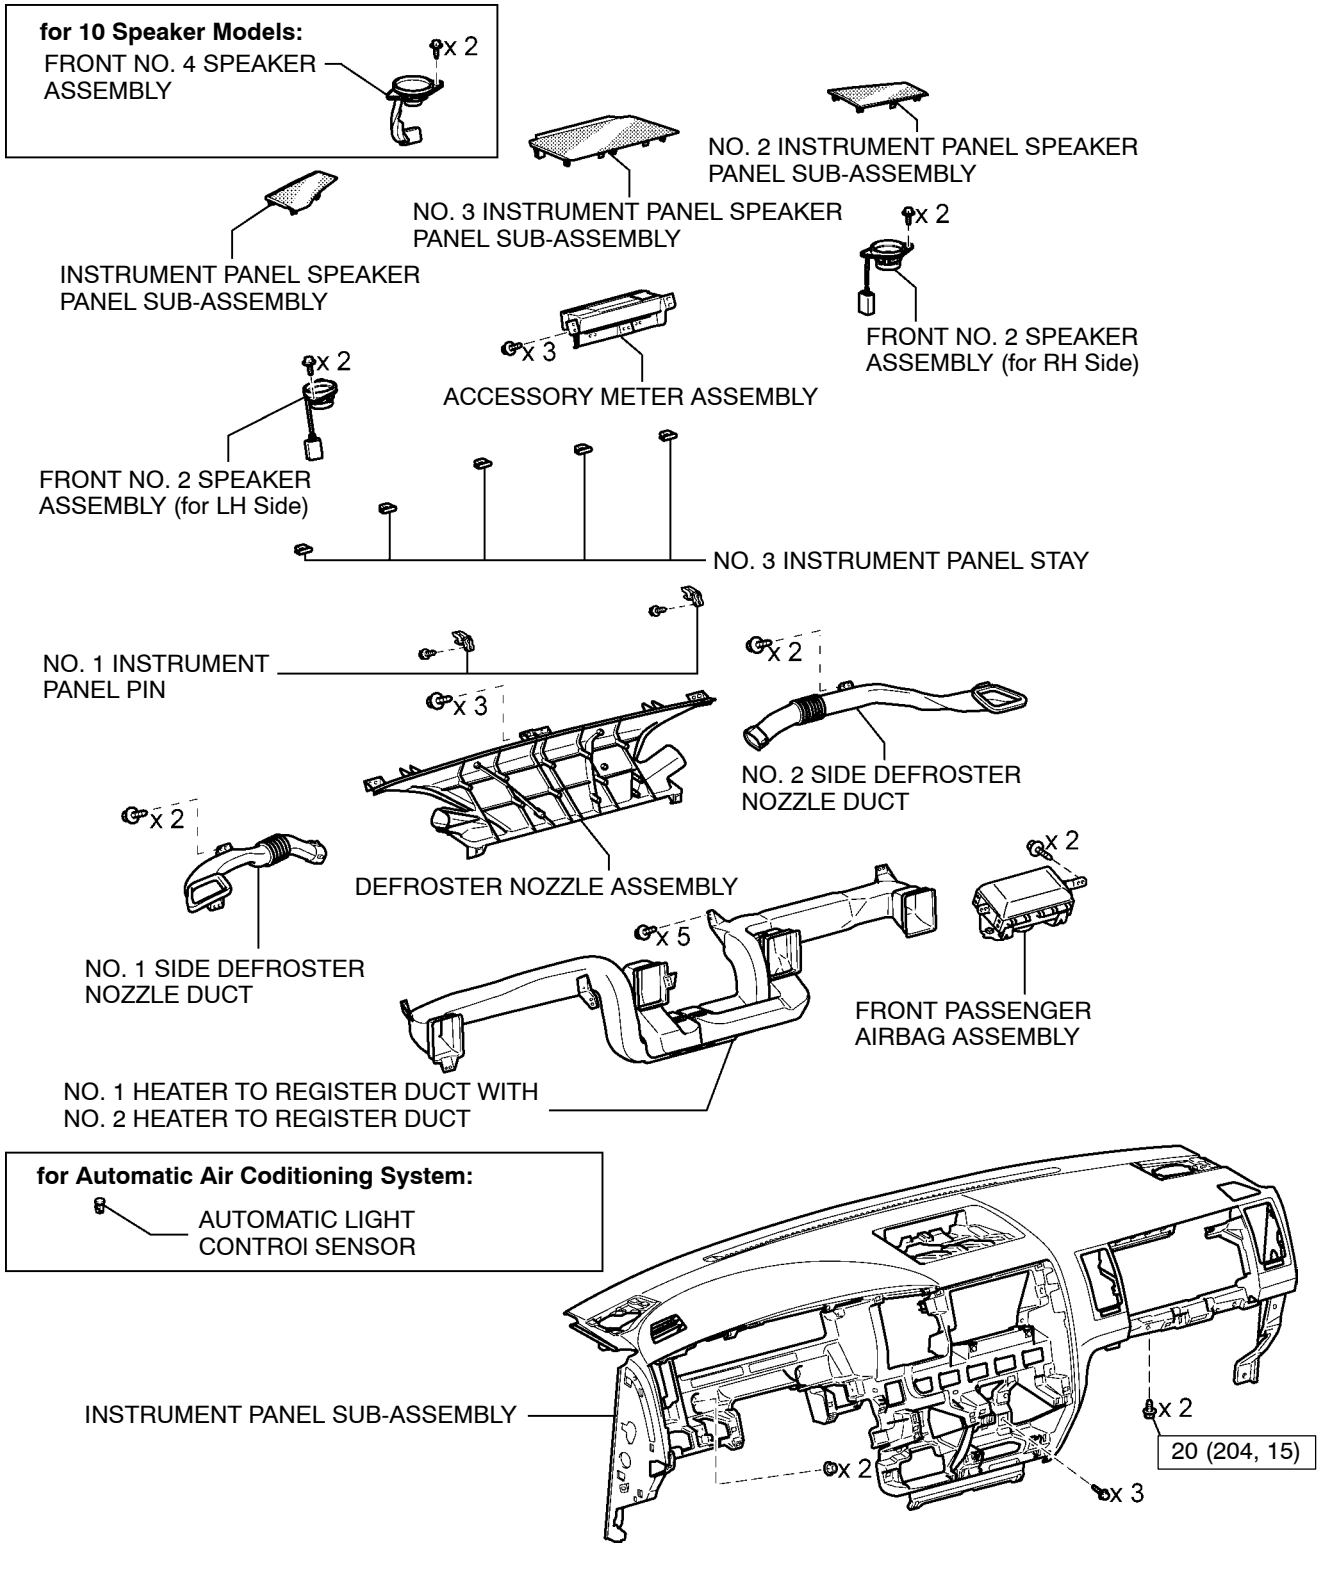


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B159874

4. INTERIOR TRIM

for Regular Cab:

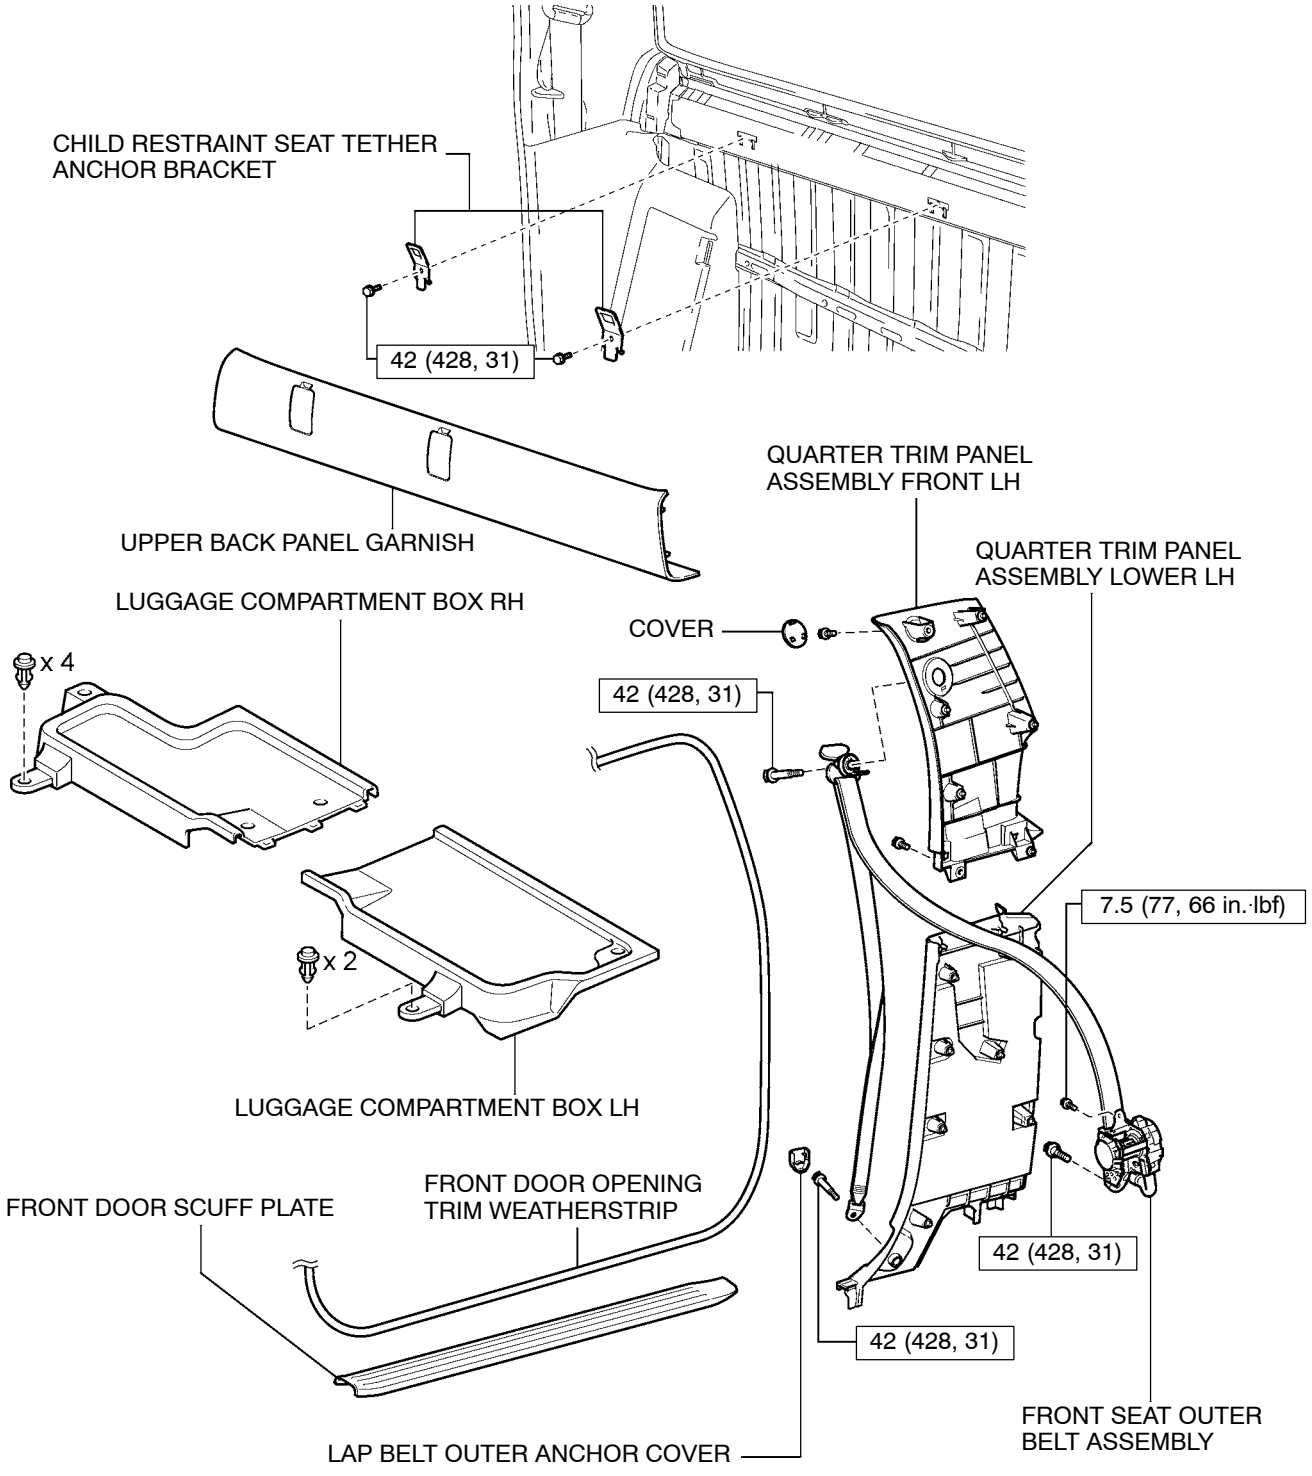


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166601


for Regular Cab:

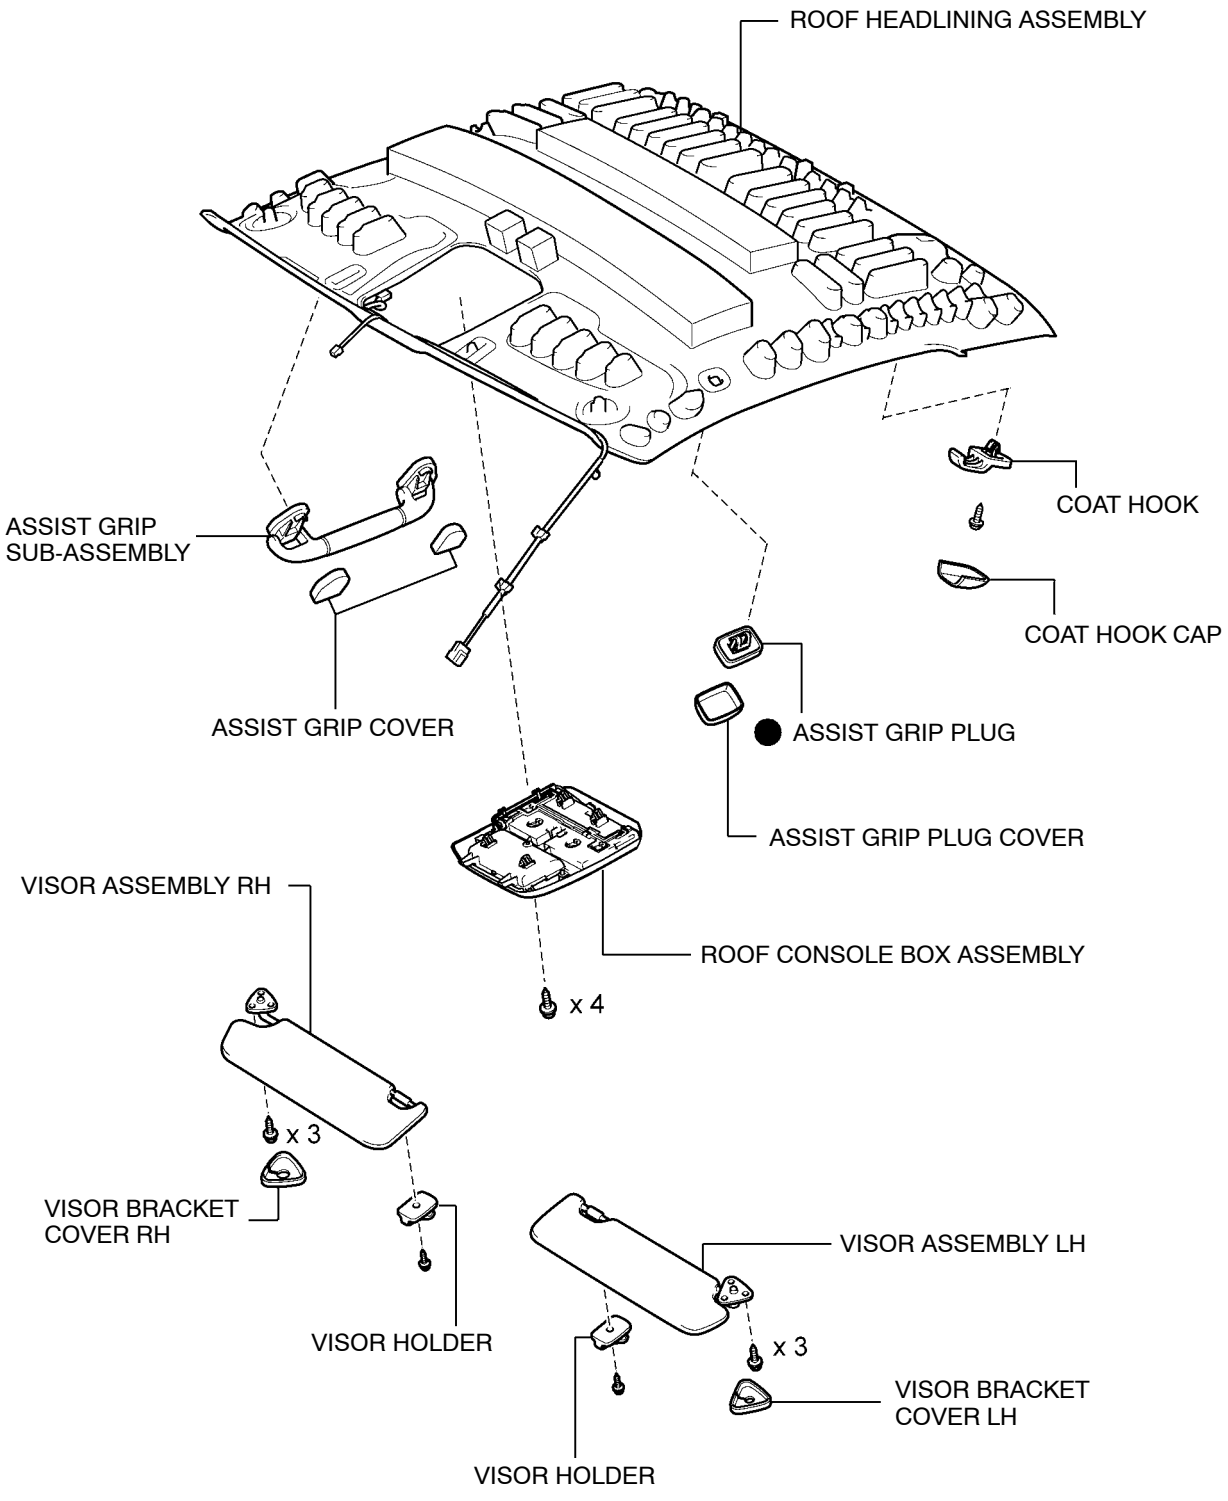

● Non-reusable part

B165703

for Double Cab:

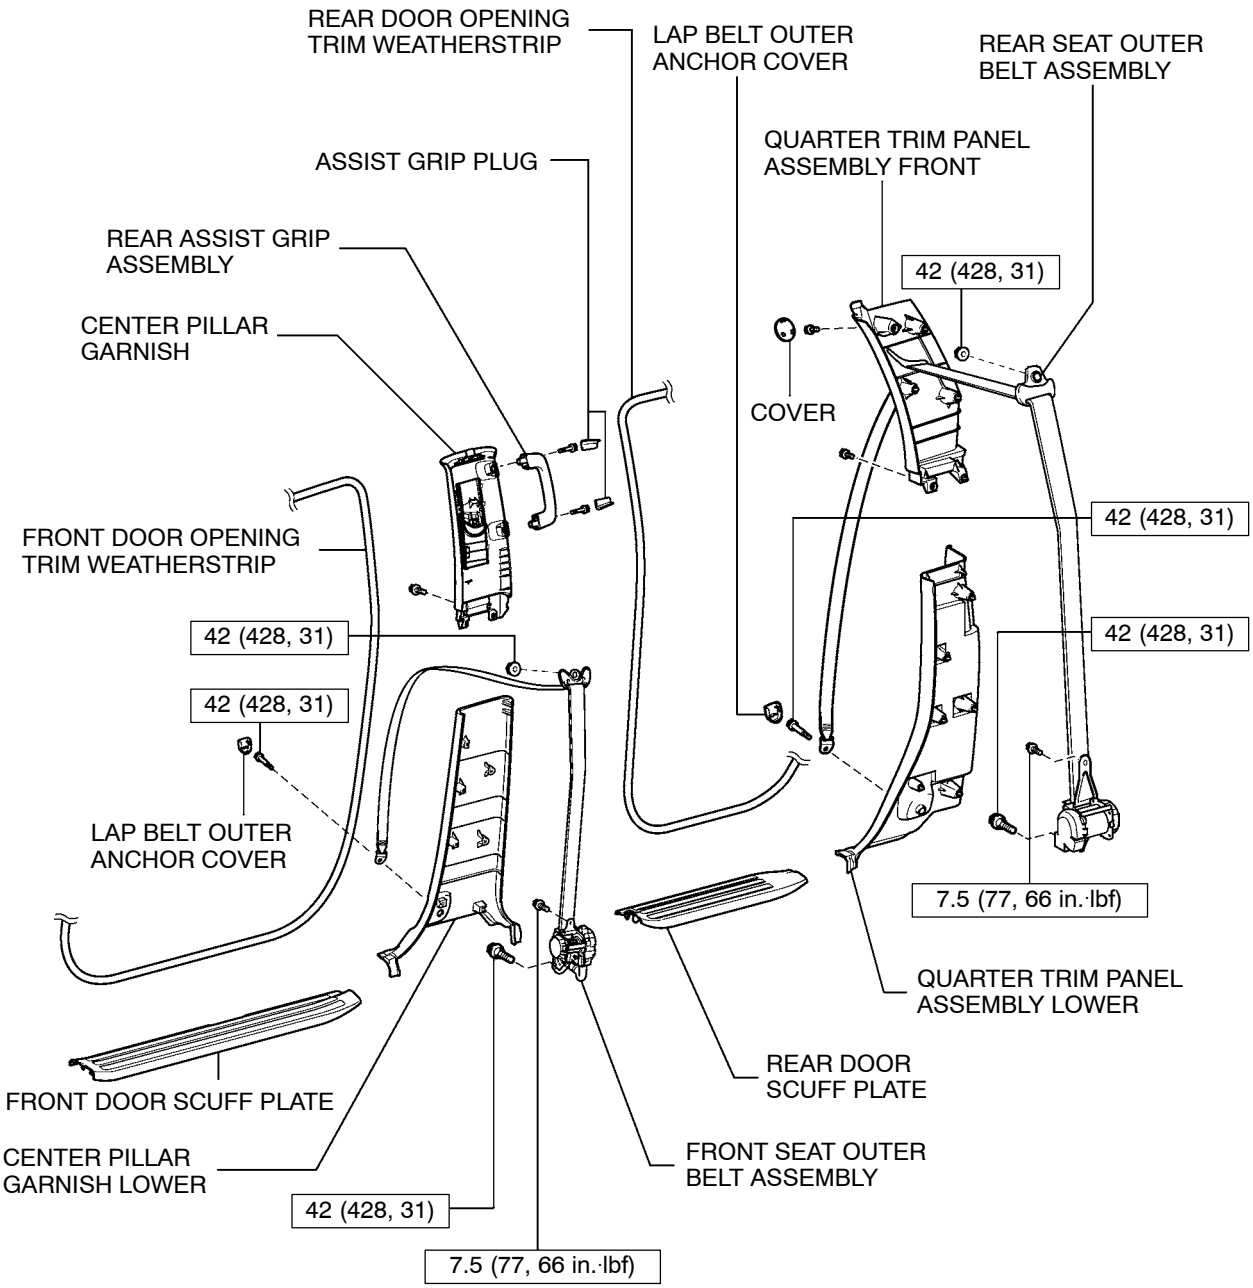


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166602

for Double Cab:

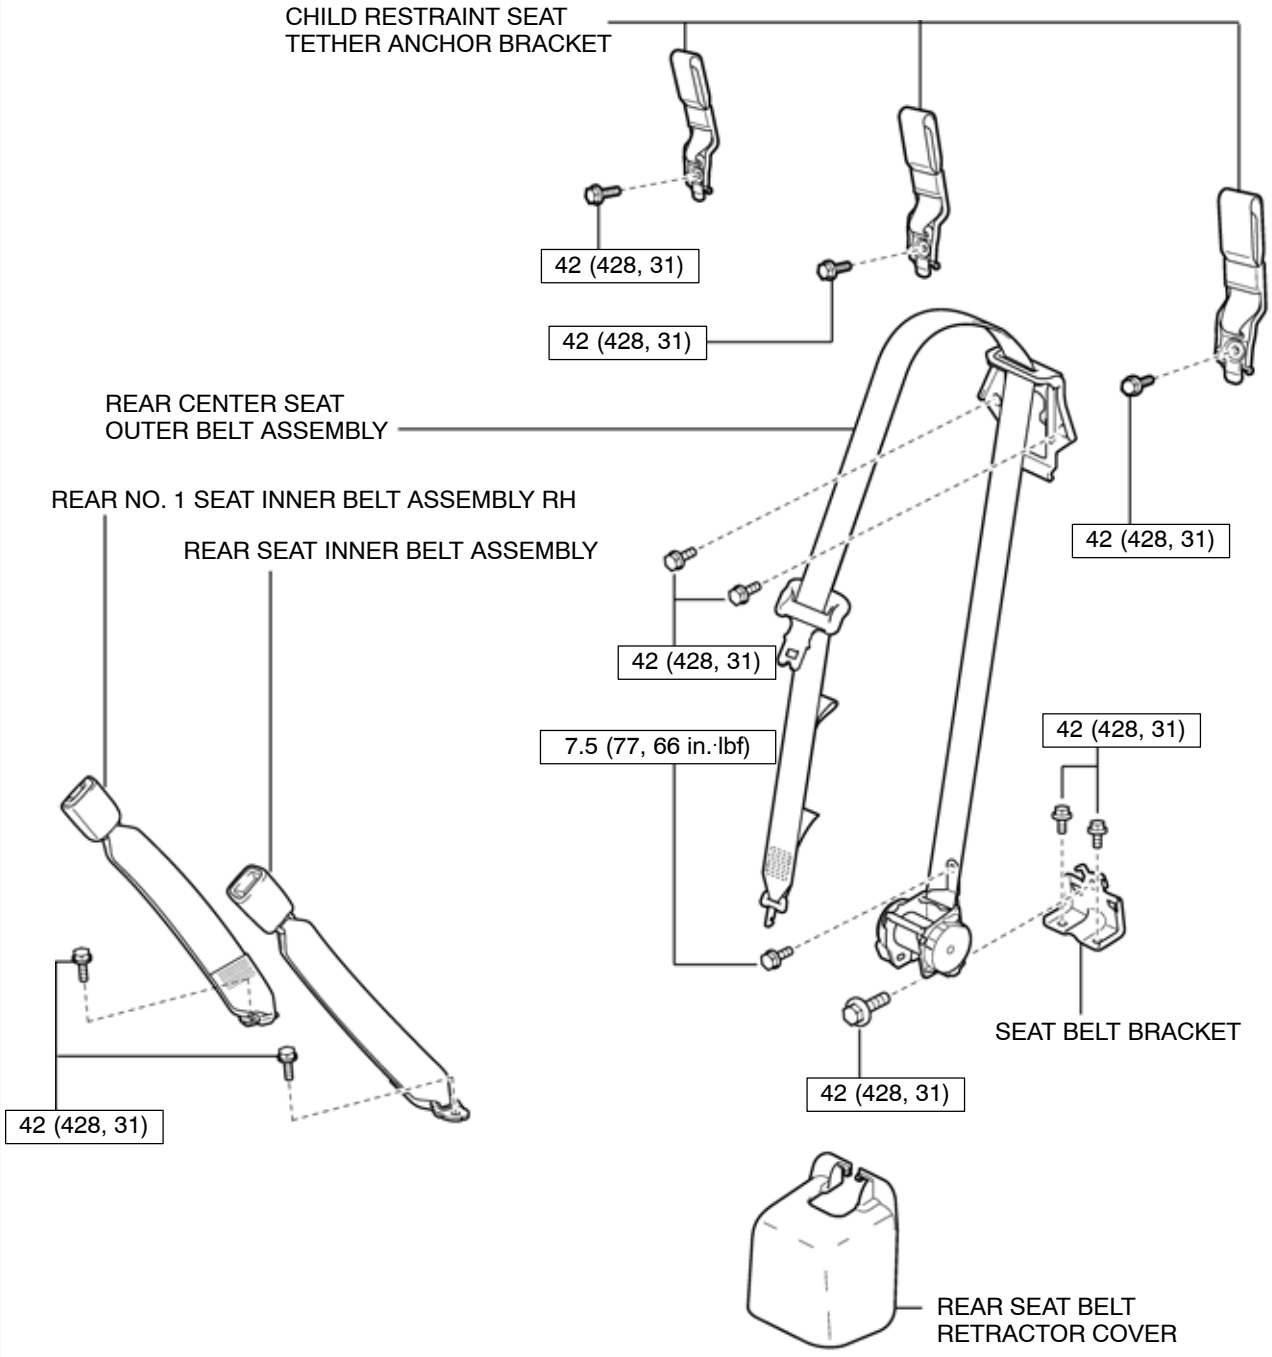


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B166726


for Double Cab:

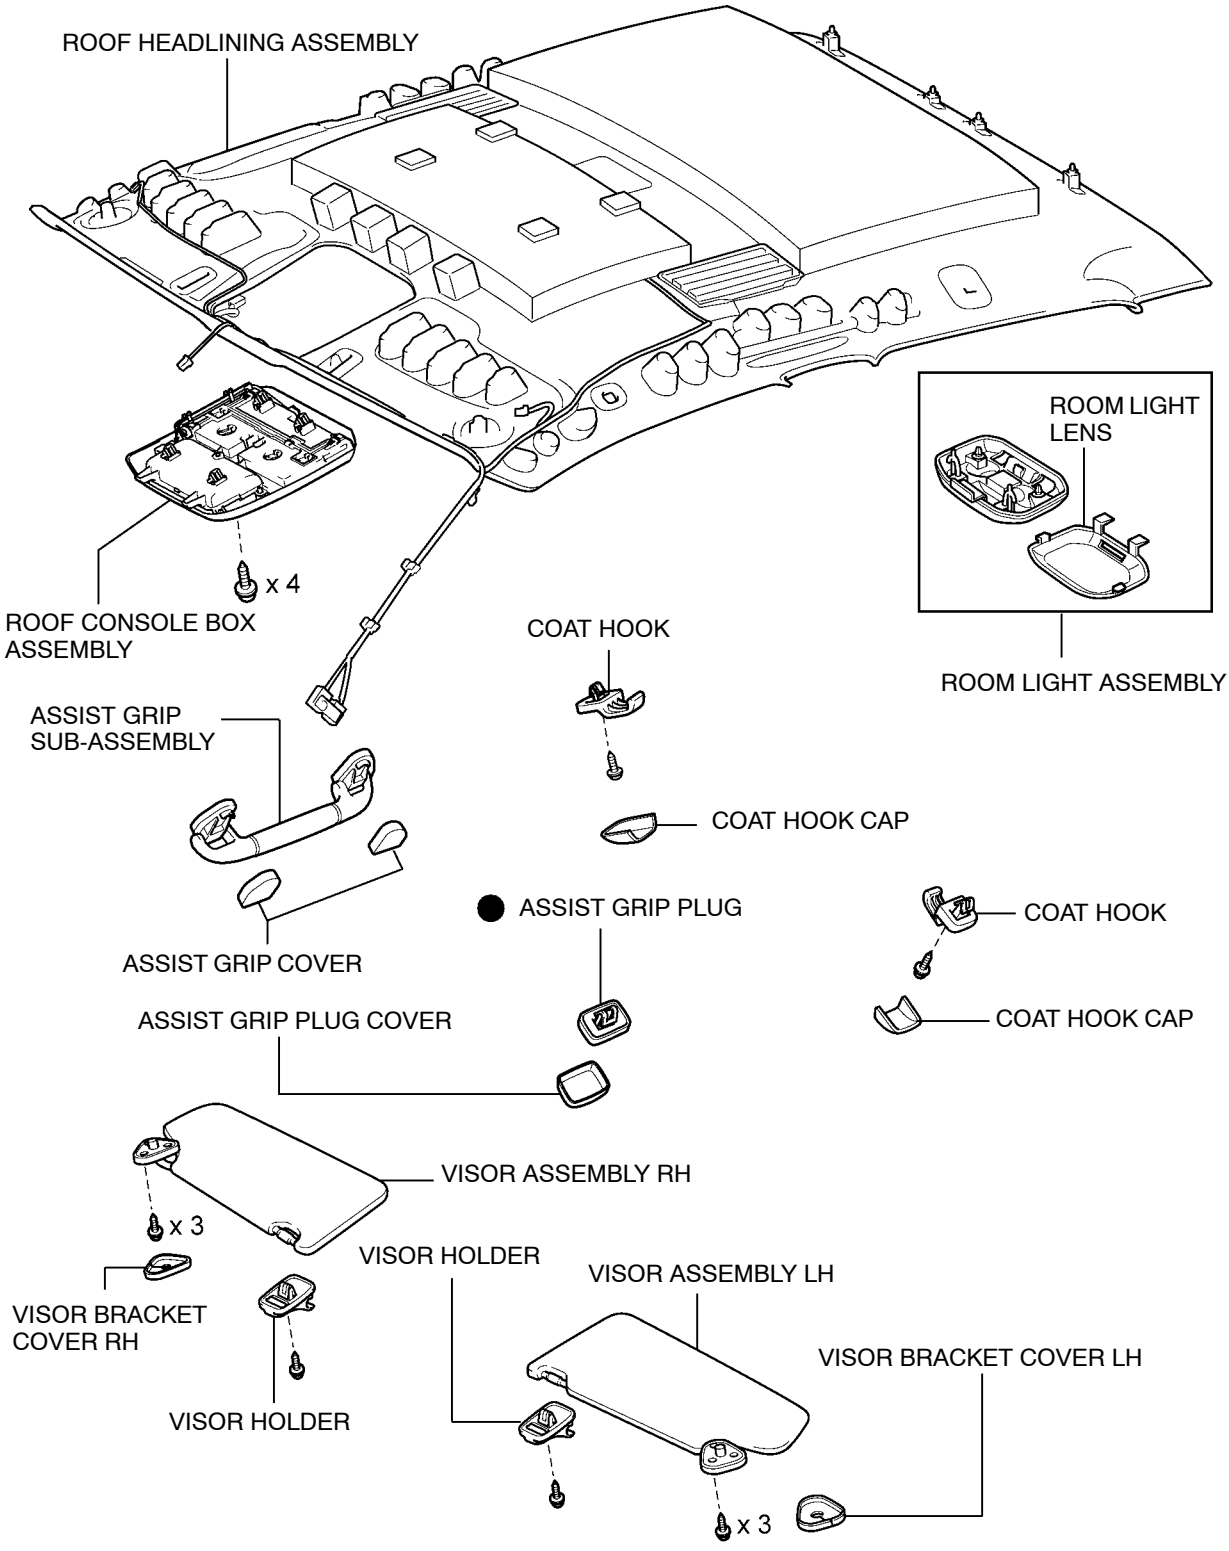

● Non-reusable part

B165823

for CrewMax:

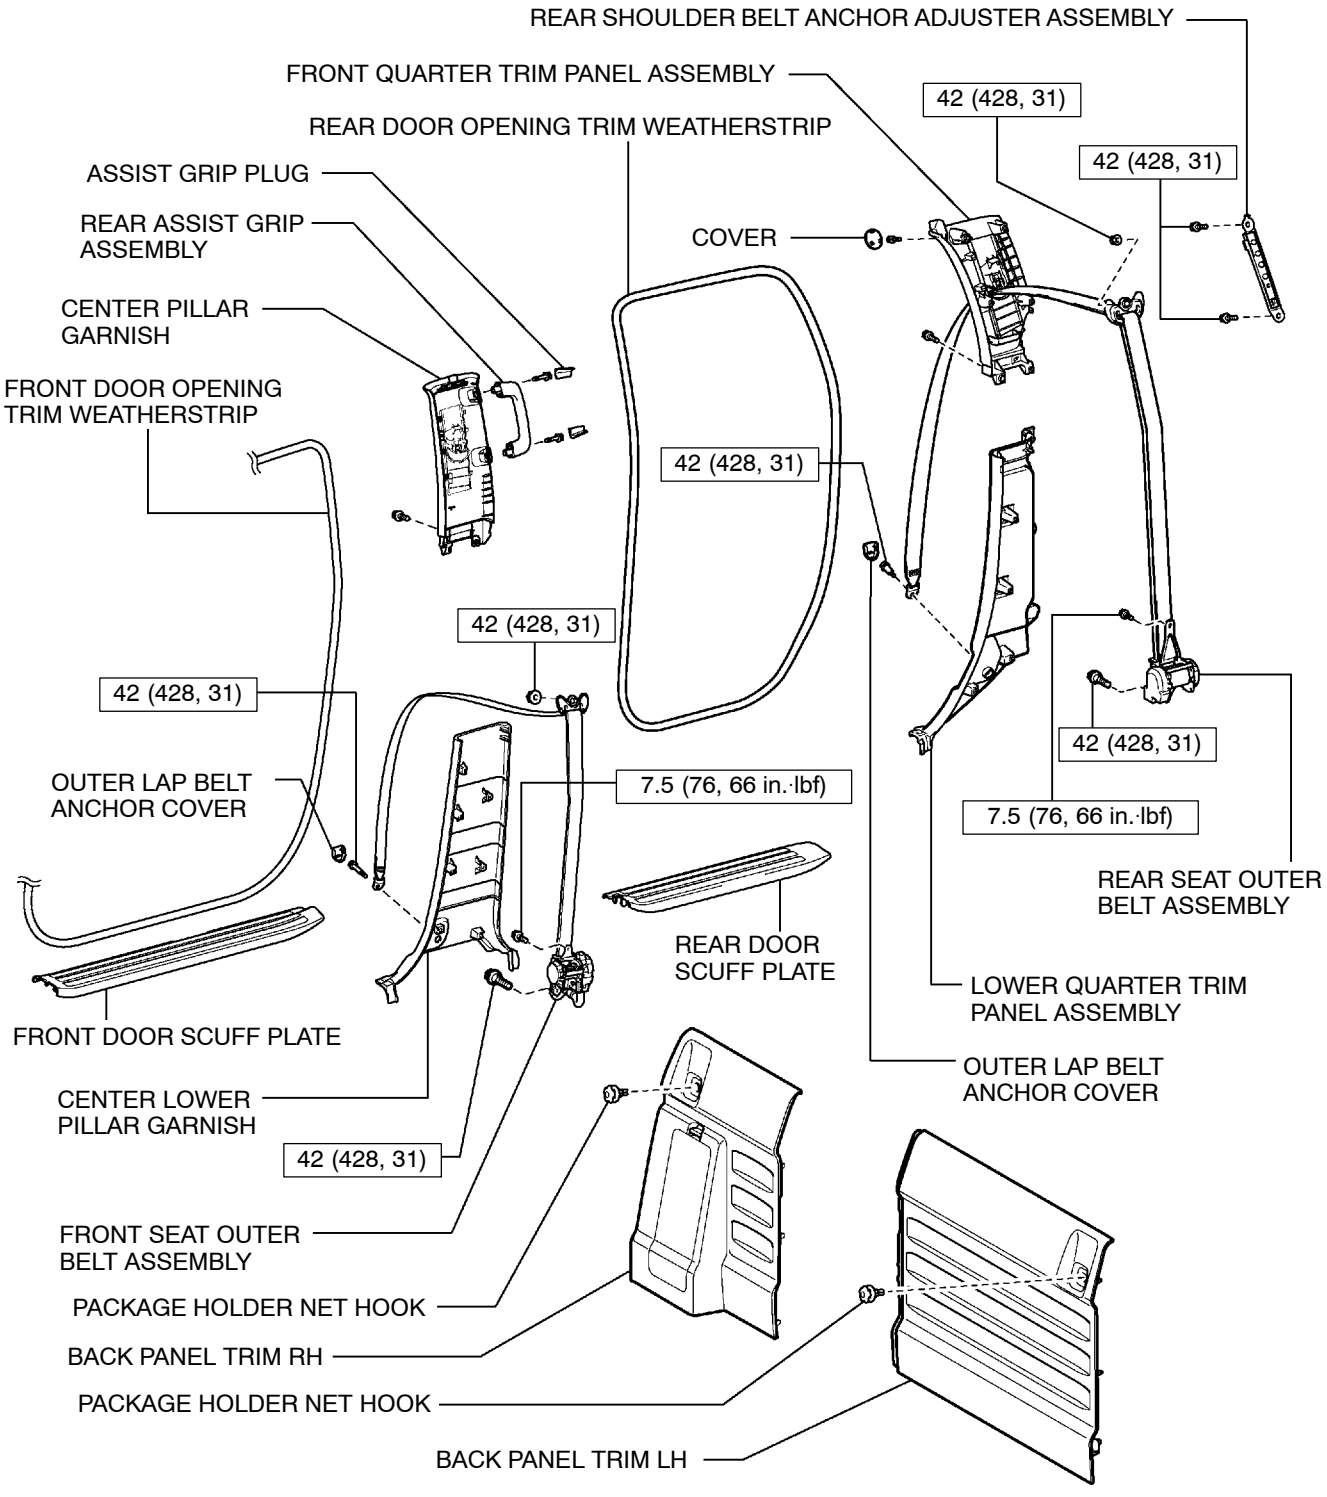


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B171635


for CrewMax:

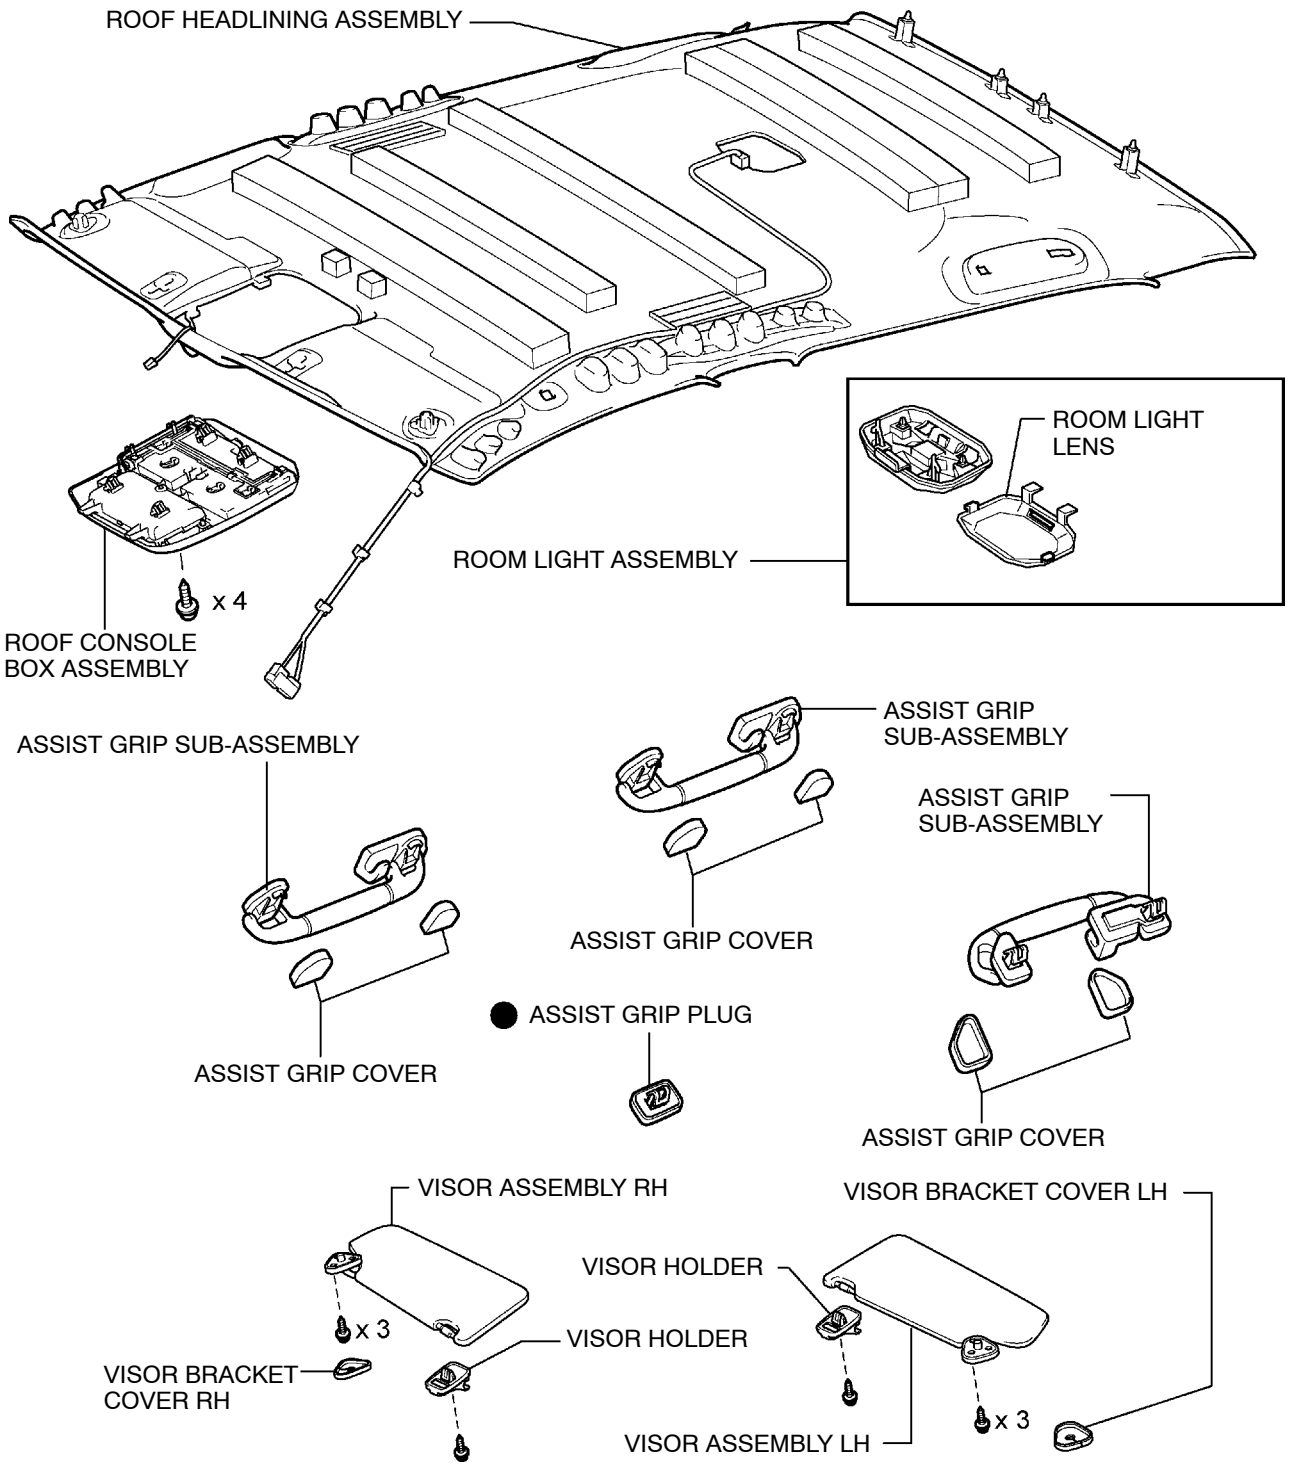

● Non-reusable part

B169209

5. FRONT SEAT

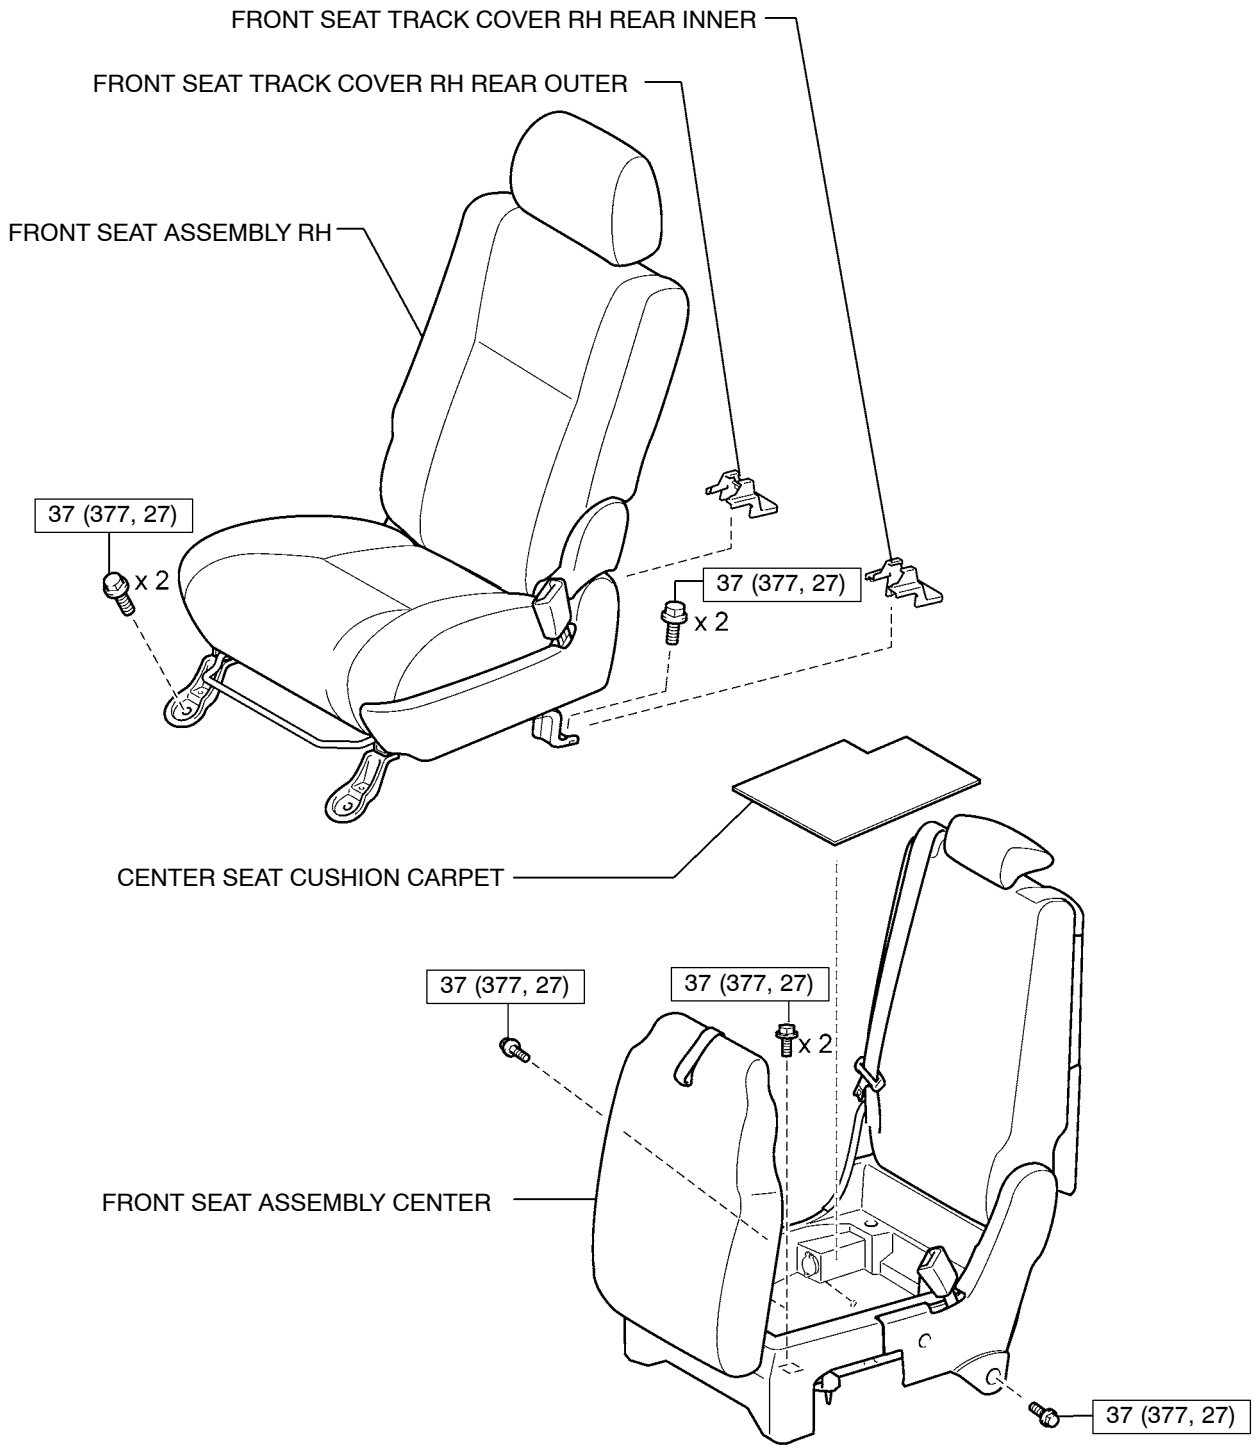

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft.·lbf) : Specified torque


B165558

6. REAR SEAT

for Double Cab

w/ Seat Under Tray:

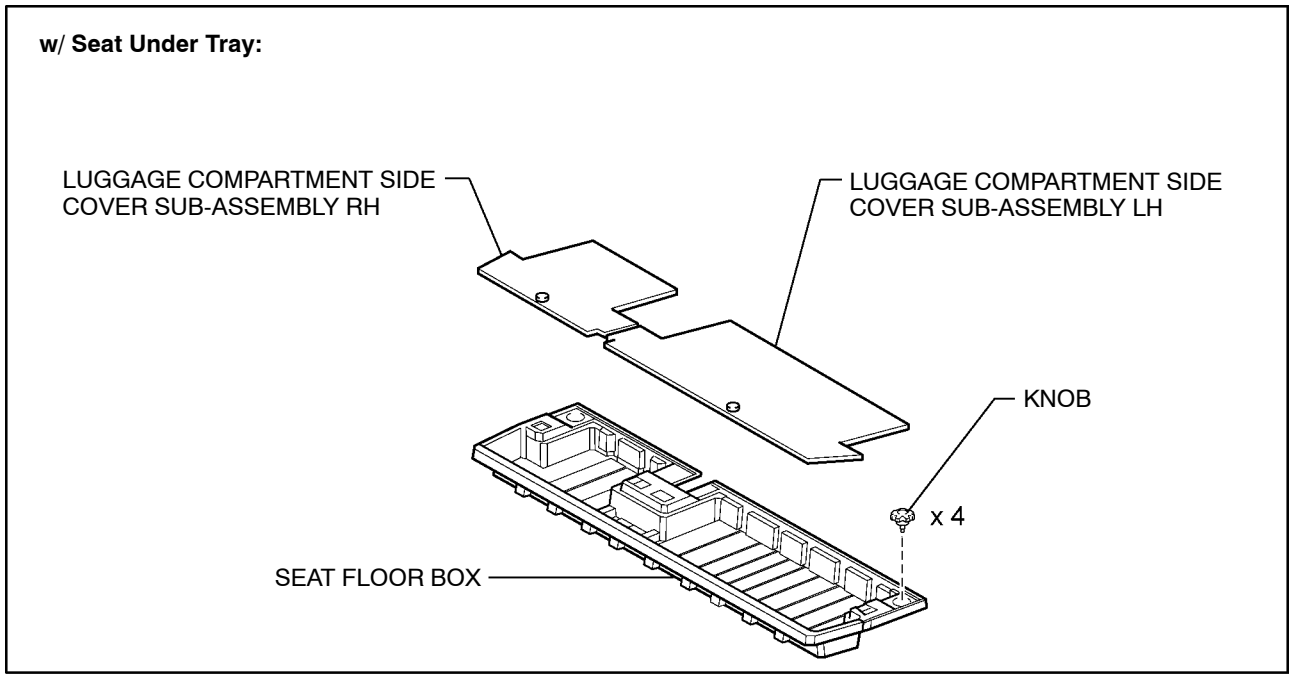

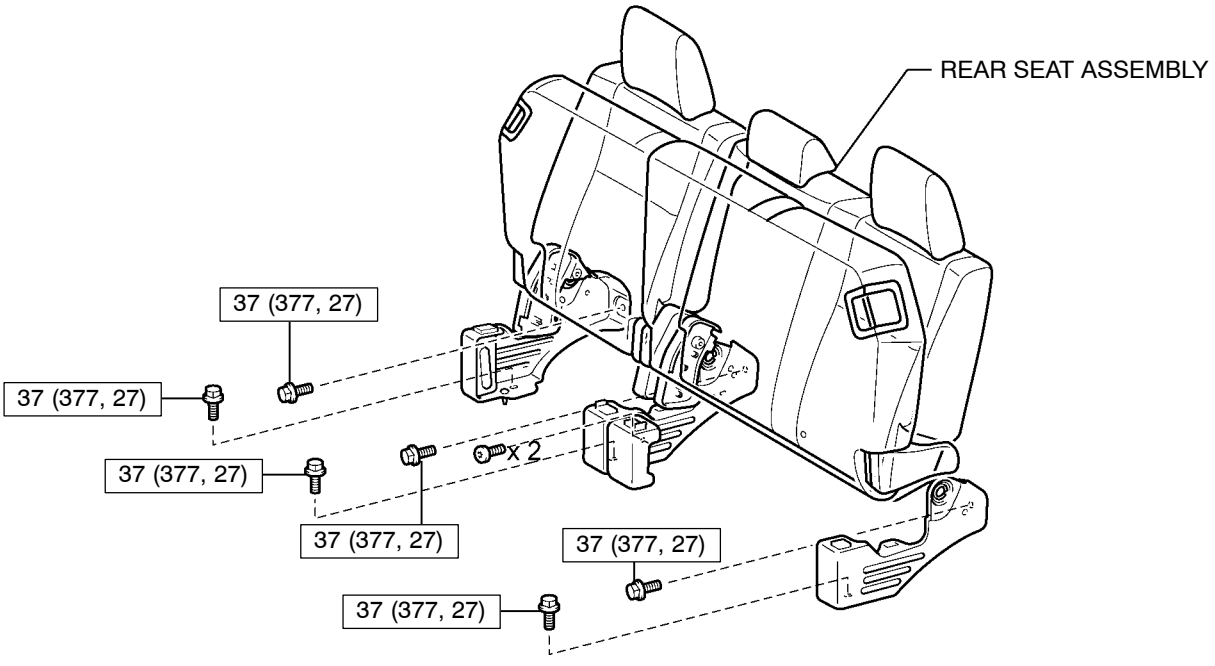


CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B165783

for CrewMax:

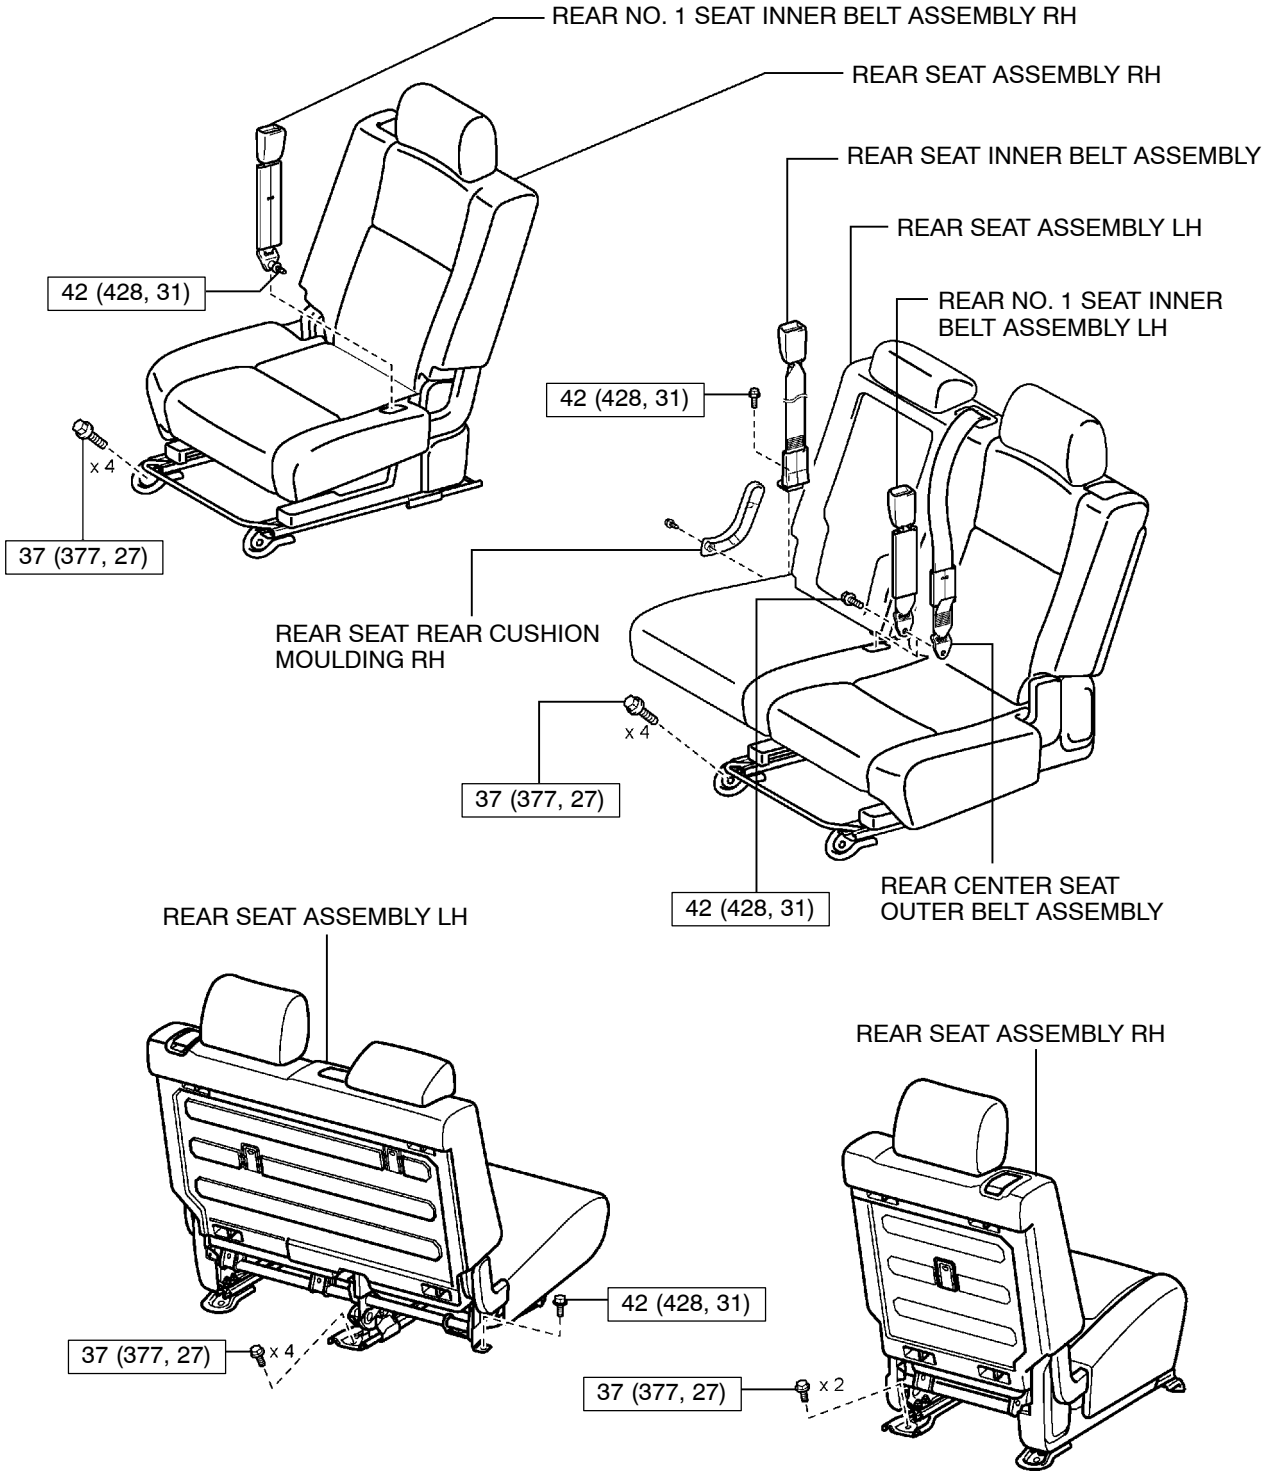

CAUTION:
The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

B167989