
■TORQUE CONVERTER

A compact, lightweight and high-capacity torque converter is used. The torque converter supports flex lock-up clutch control, thus allowing for improved fuel economy.

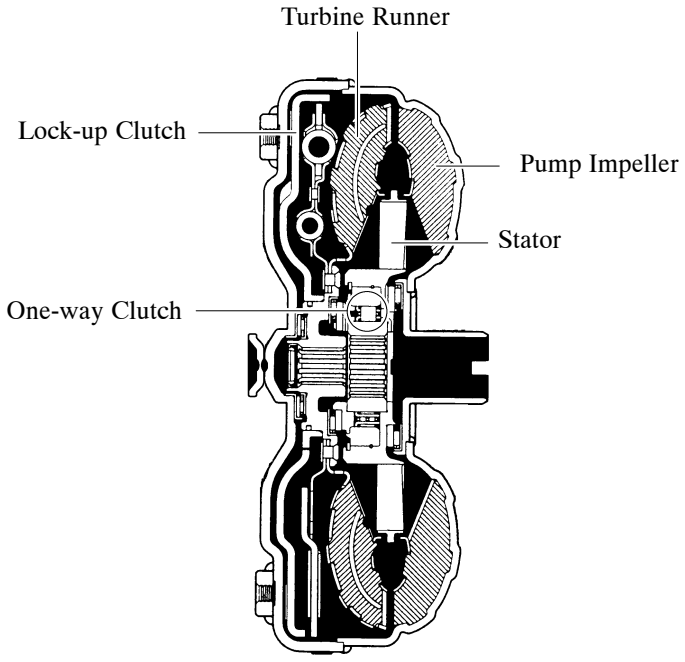


279CH08

▶ Specifications ◀

Engine Type	1GR-FE	2UZ-FE	
Transmission Type	**A750E**	**A750E**	**A750F**
Stall Torque Ratio	1.85	1.80	
Type	3-Element, 1-Step, 2-Phase		

■OIL PUMP

The oil pump is driven by the torque converter. It lubricates the planetary gear units and supplies operating fluid pressure for hydraulic control.
The pump cover is made of aluminum to reduce weight.

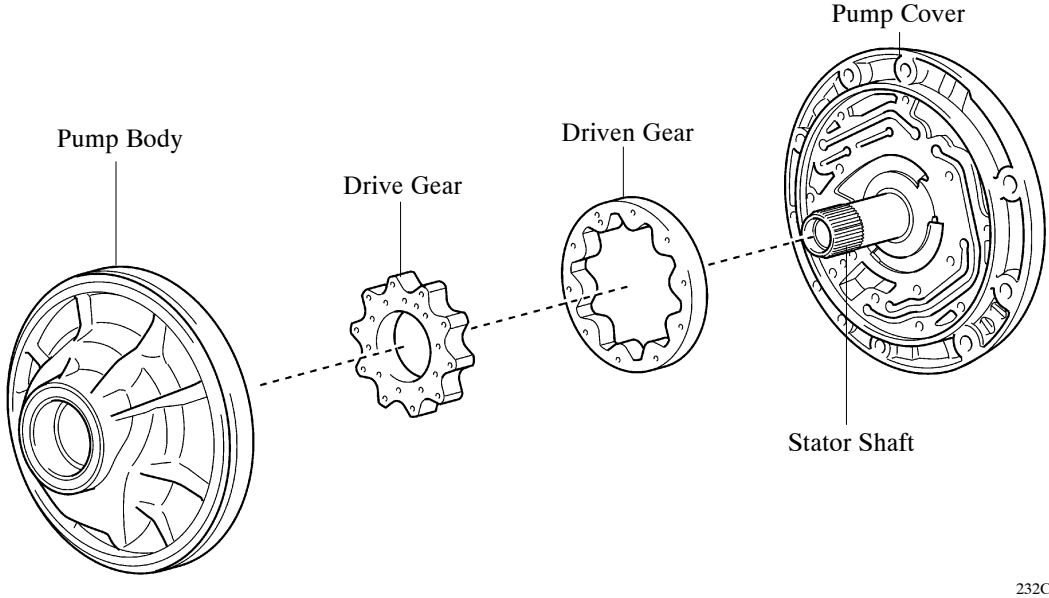

232CH89