



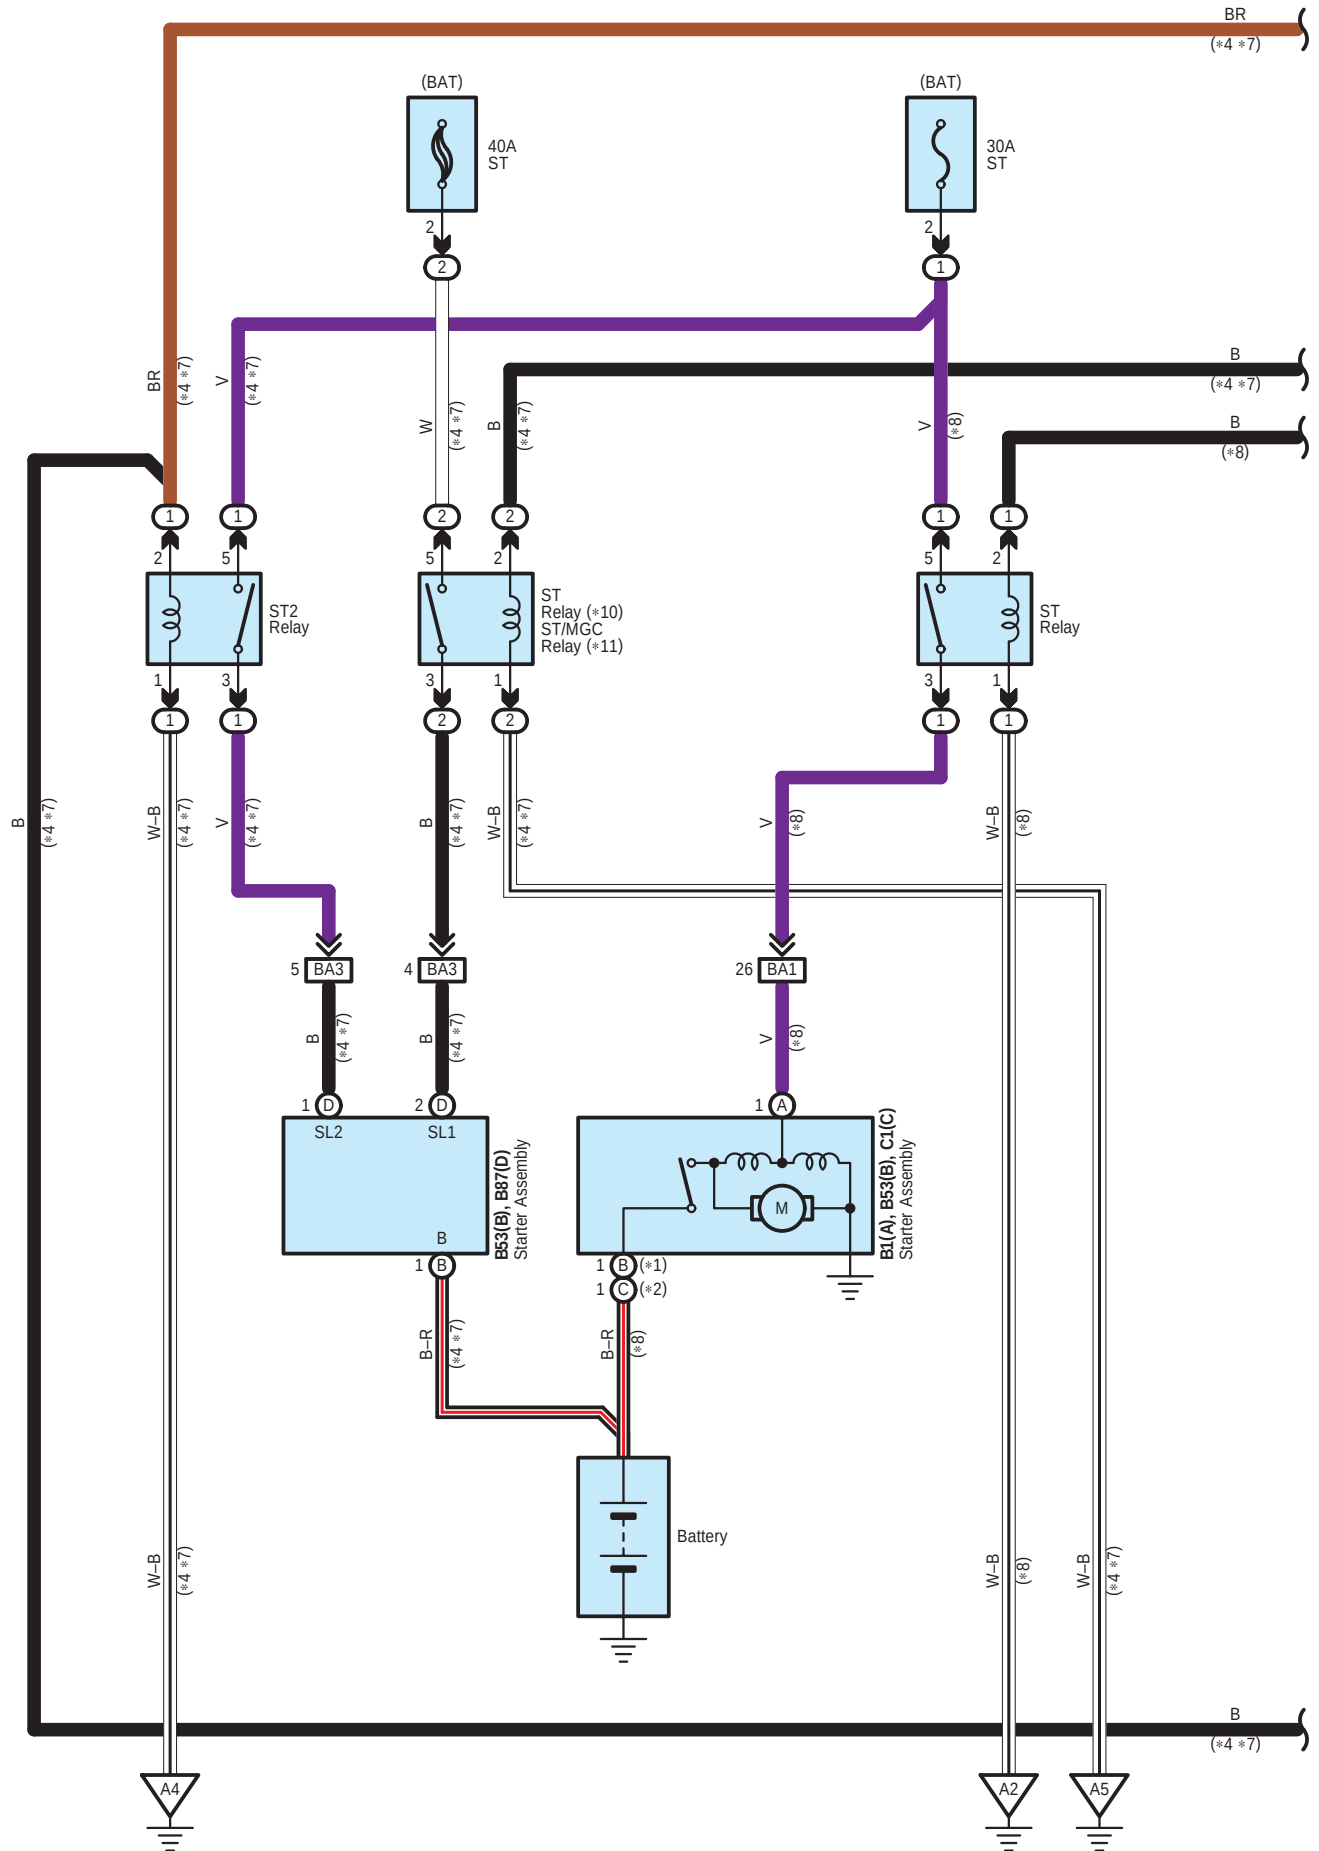









Starting <w/o Entry & Start System>

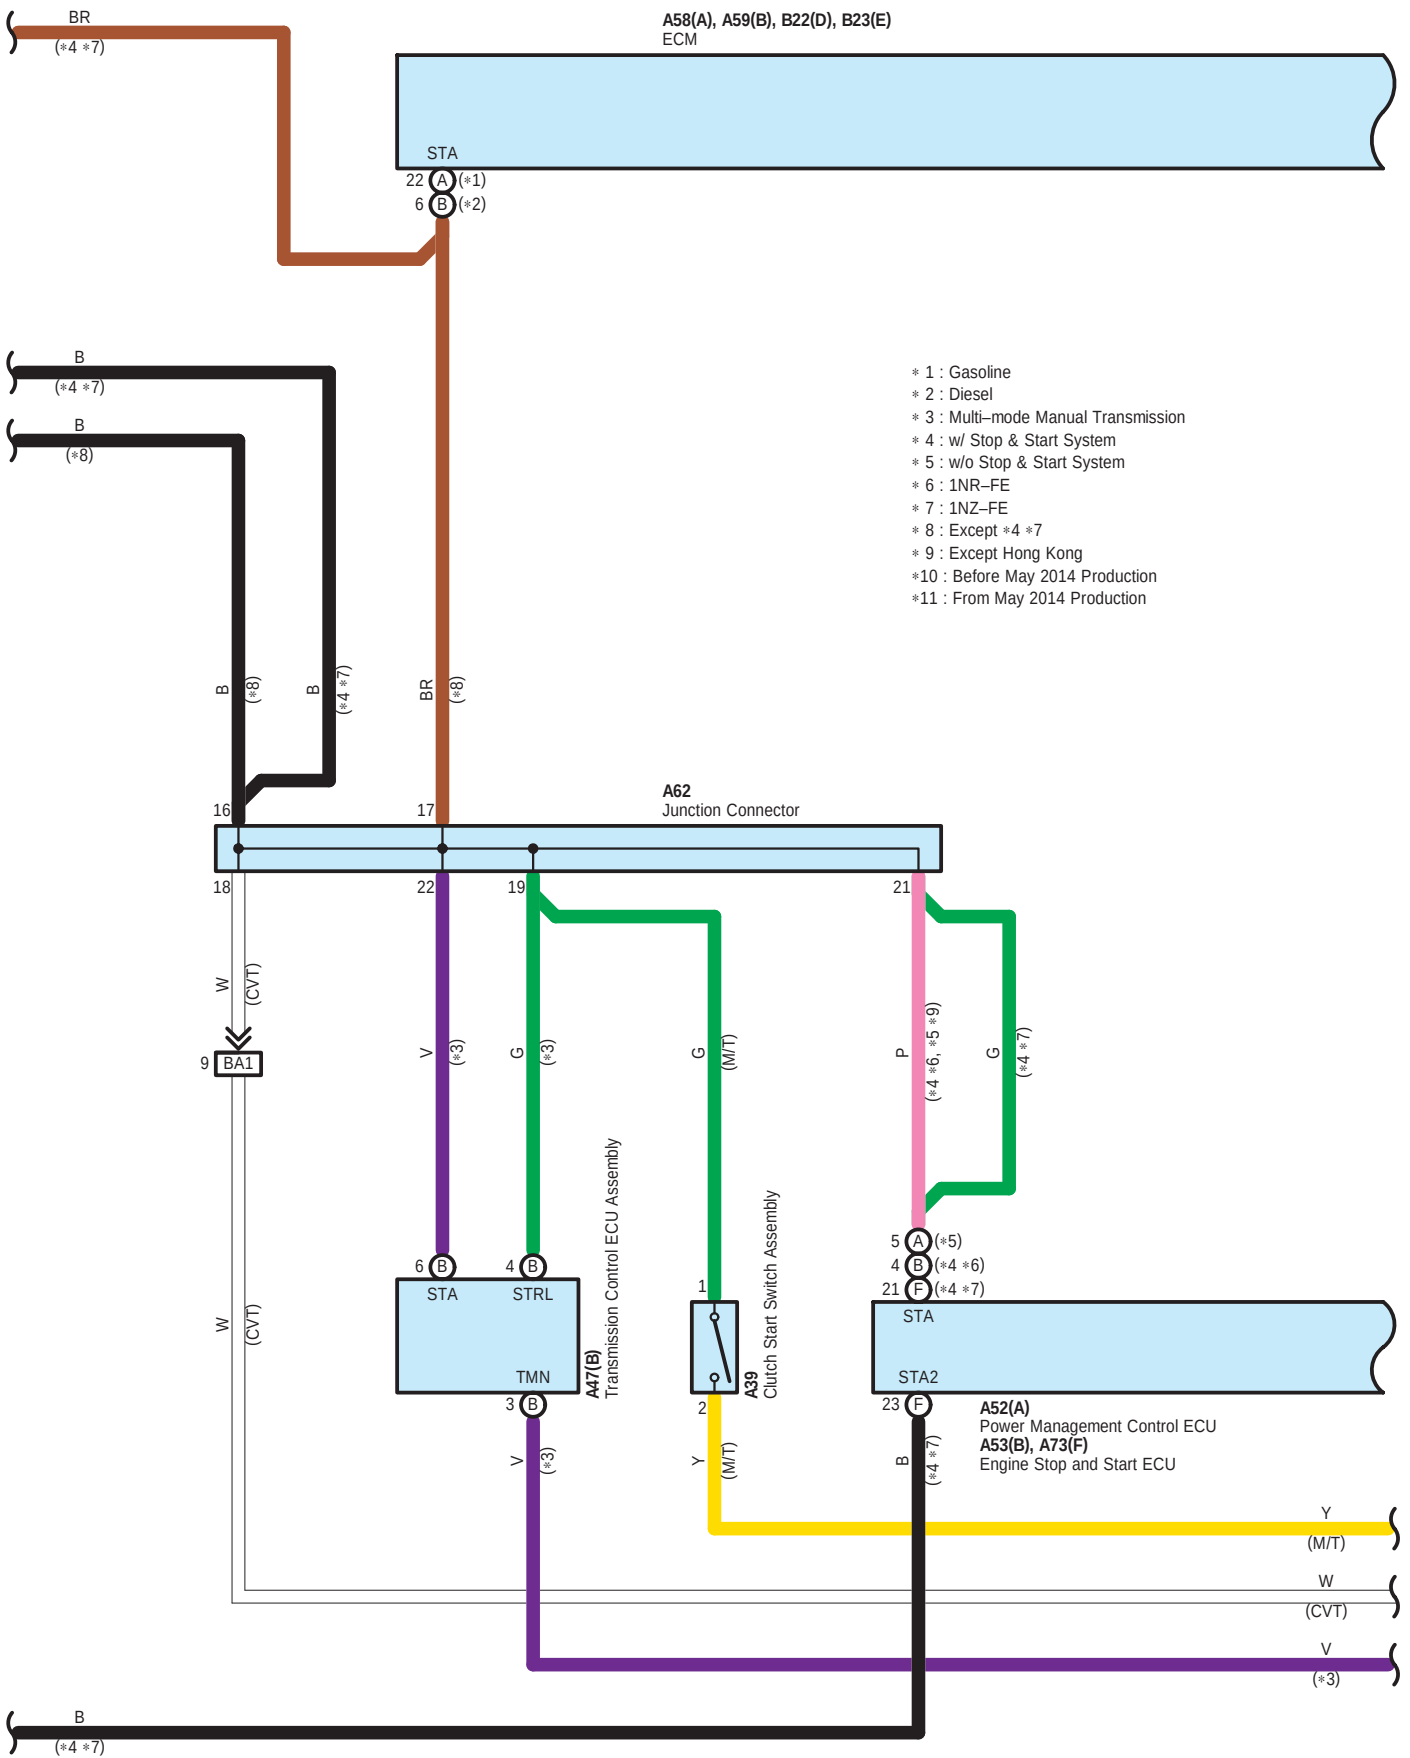

- * 1 : Gasoline
- * 2 : Diesel
- * 3 : Multi-mode Manual Transmission
- * 4 : w/ Stop & Start System
- * 5 : w/o Stop & Start System
- * 6 : 1NR-FE
- * 7 : 1NZ-FE
- * 8 : Except *4 *7
- * 9 : Except Hong Kong
- *10 : Before May 2014 Production
- *11 : From May 2014 Production

Starting <w/o Entry & Start System>

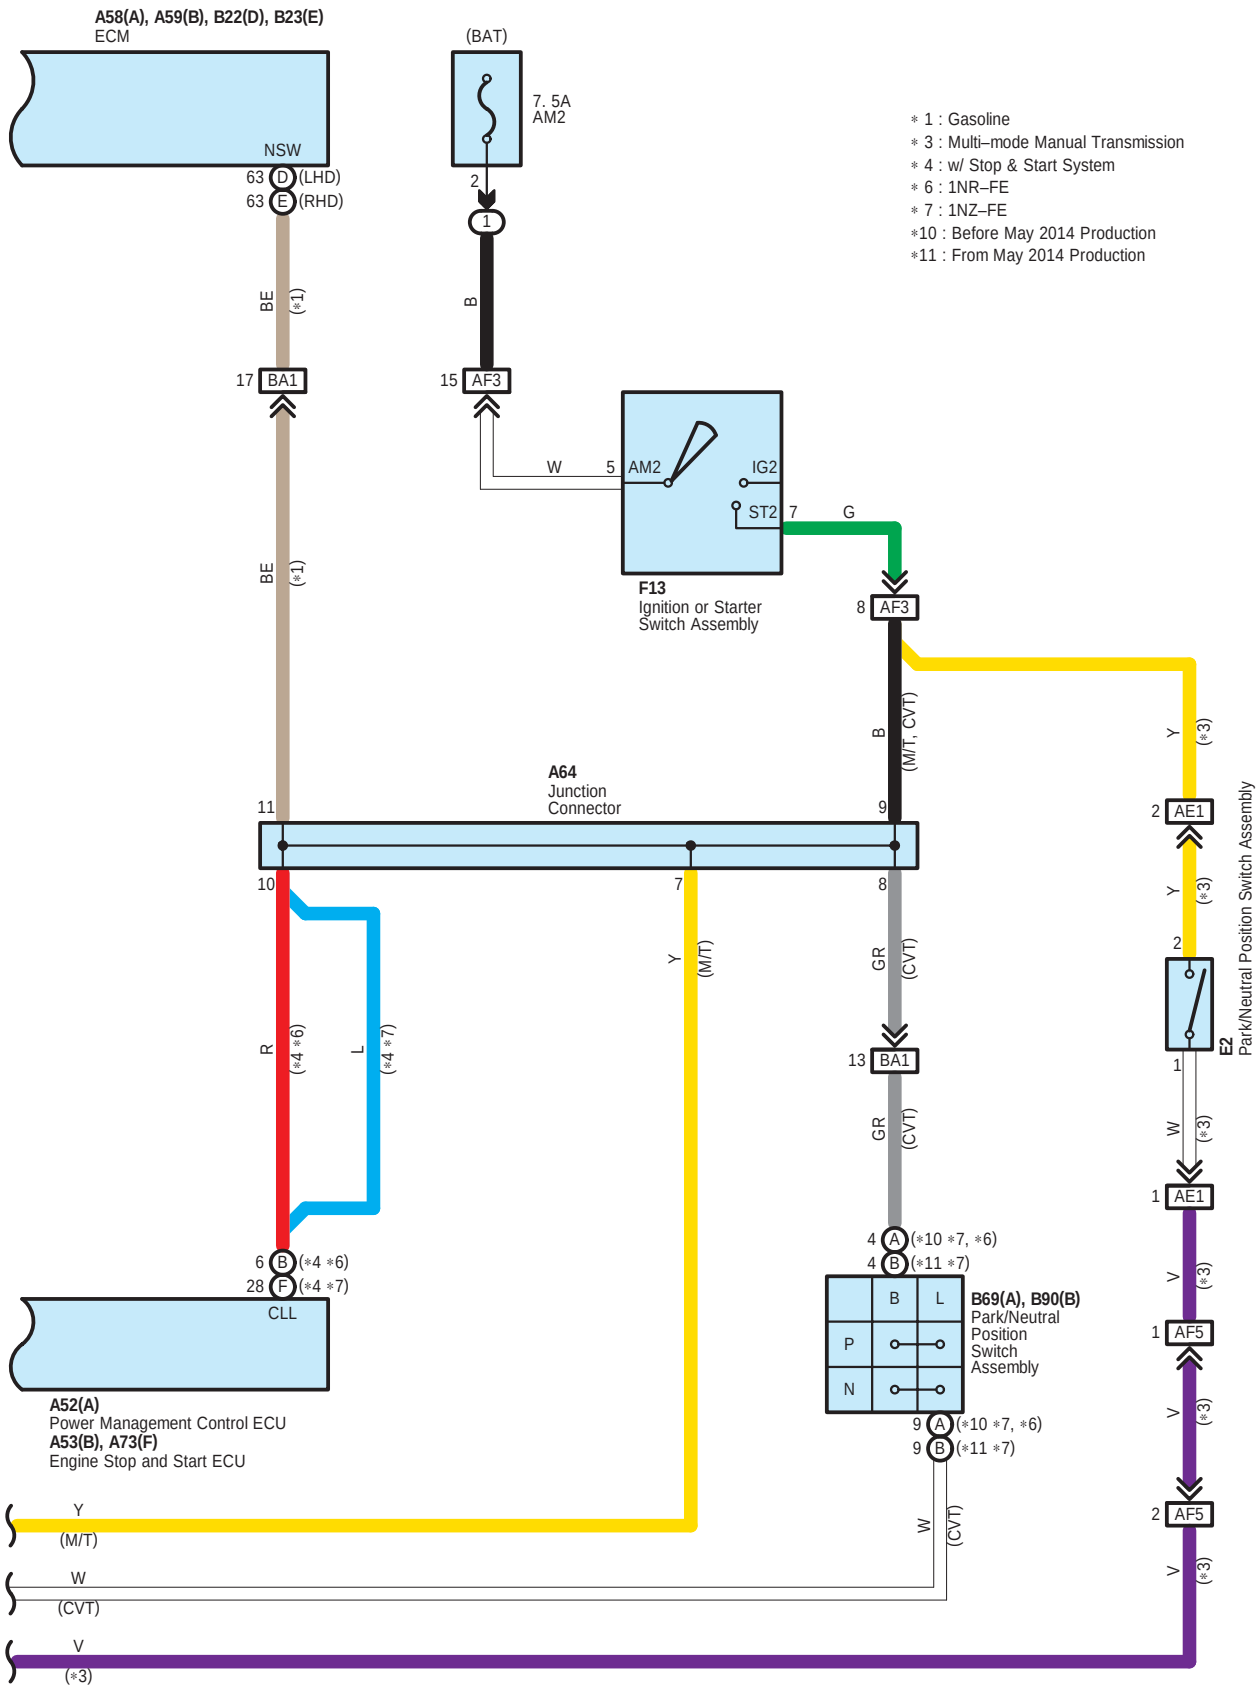

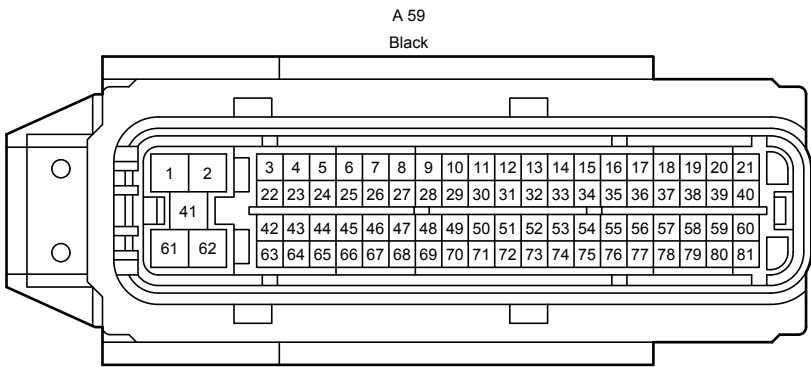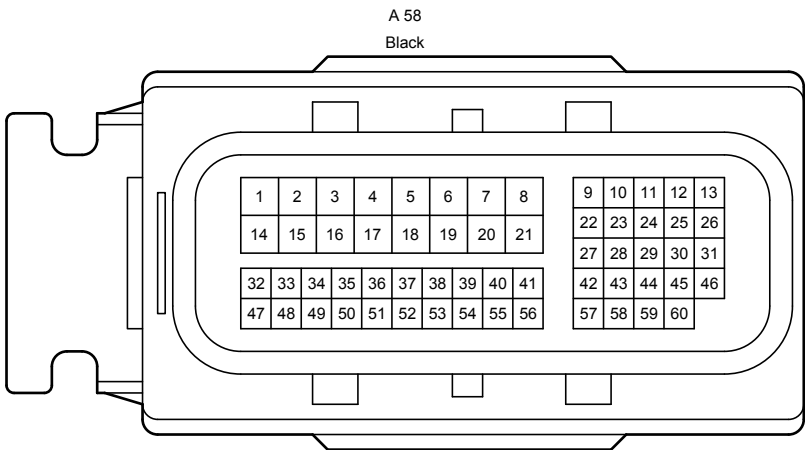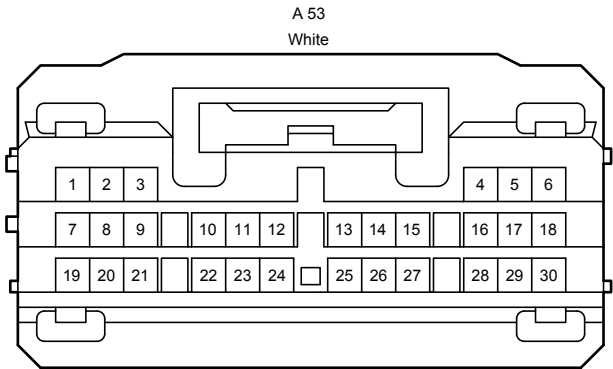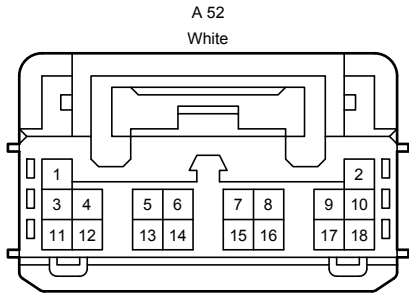

A diagram of a 28-pin DIP package. The package is shown from a top-down perspective, with pins on all four sides. The pins are numbered 1 through 28. Pins 1 through 6 are on the left side, pins 7 through 11 are on the right side, pins 12 through 17 are on the bottom side, and pins 18 through 23 are on the top side. Pins 24 through 28 are on the bottom side, starting from the right and moving left. The package has a central notch on the top edge.

[illegible]

The image shows a rectangular electronic device, likely a handheld calculator or a small terminal, with a large display area on the left and a control panel on the right. The display area is divided into several sections, each containing a grid of numbers or symbols. The control panel includes several buttons and a small display area.

The display area is divided into several sections, each containing a grid of numbers or symbols. The sections are as follows:

- Top Left Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 61 through 67 and the last two rows containing the numbers 76 through 82.
- Top Middle Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 68 through 75 and the last two rows containing the numbers 83 through 90.
- Top Right Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 91 through 100 and the last two rows containing the numbers 101 through 110.
- Bottom Left Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 111 through 118 and the last two rows containing the numbers 119 through 126.
- Bottom Middle Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 127 through 134 and the last two rows containing the numbers 135 through 142.
- Bottom Right Section:** A 4x6 grid of numbers, with the first two rows containing the numbers 143 through 150 and the last two rows containing the numbers 151 through 158.

The control panel on the right side of the device includes several buttons and a small display area. The buttons are arranged in a vertical column, and the display area is located at the top of the control panel.

Diagram 1: A circular cross-section of a pipe with a central hole. The outer radius is labeled R and the inner radius is labeled r . The diagram is labeled with the number 1.

A diagram of a 9-pin D-sub connector. The pins are numbered 1 through 9. Pins 1, 2, 3, and 4 are in the top row. Pins 5, 6, 7, 8, and 9 are in the bottom row. The connector has a D-shaped shield and a latch mechanism.

Starting <w/o Entry & Start System>

