


COWL TOP SIDE UPPER PANEL (ASSY): Hatchback



F22834A

REPLACEMENT
With the cowl top side panel removed.

REMOVAL

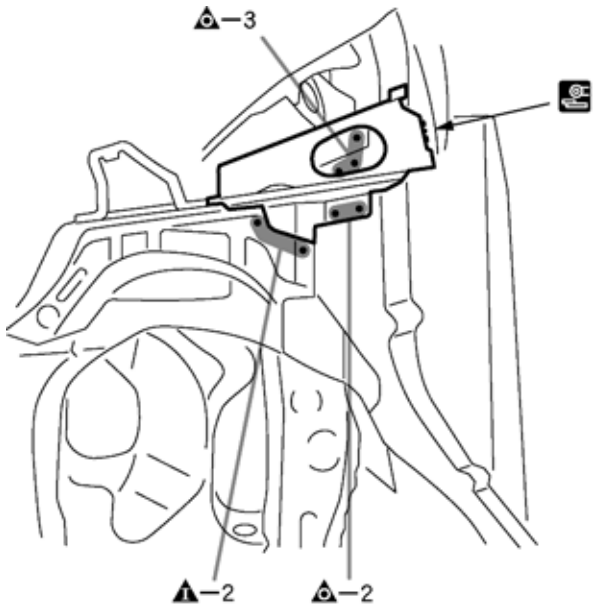

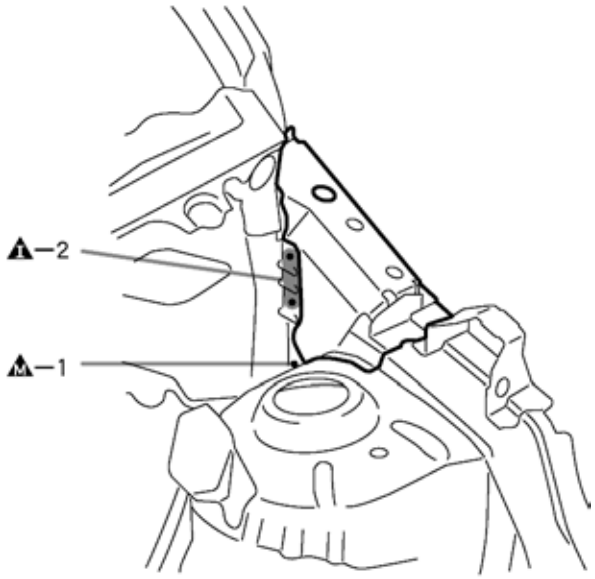


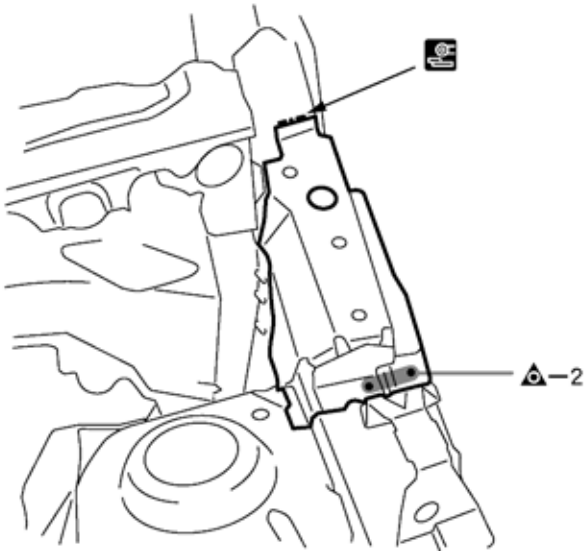

F22834

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

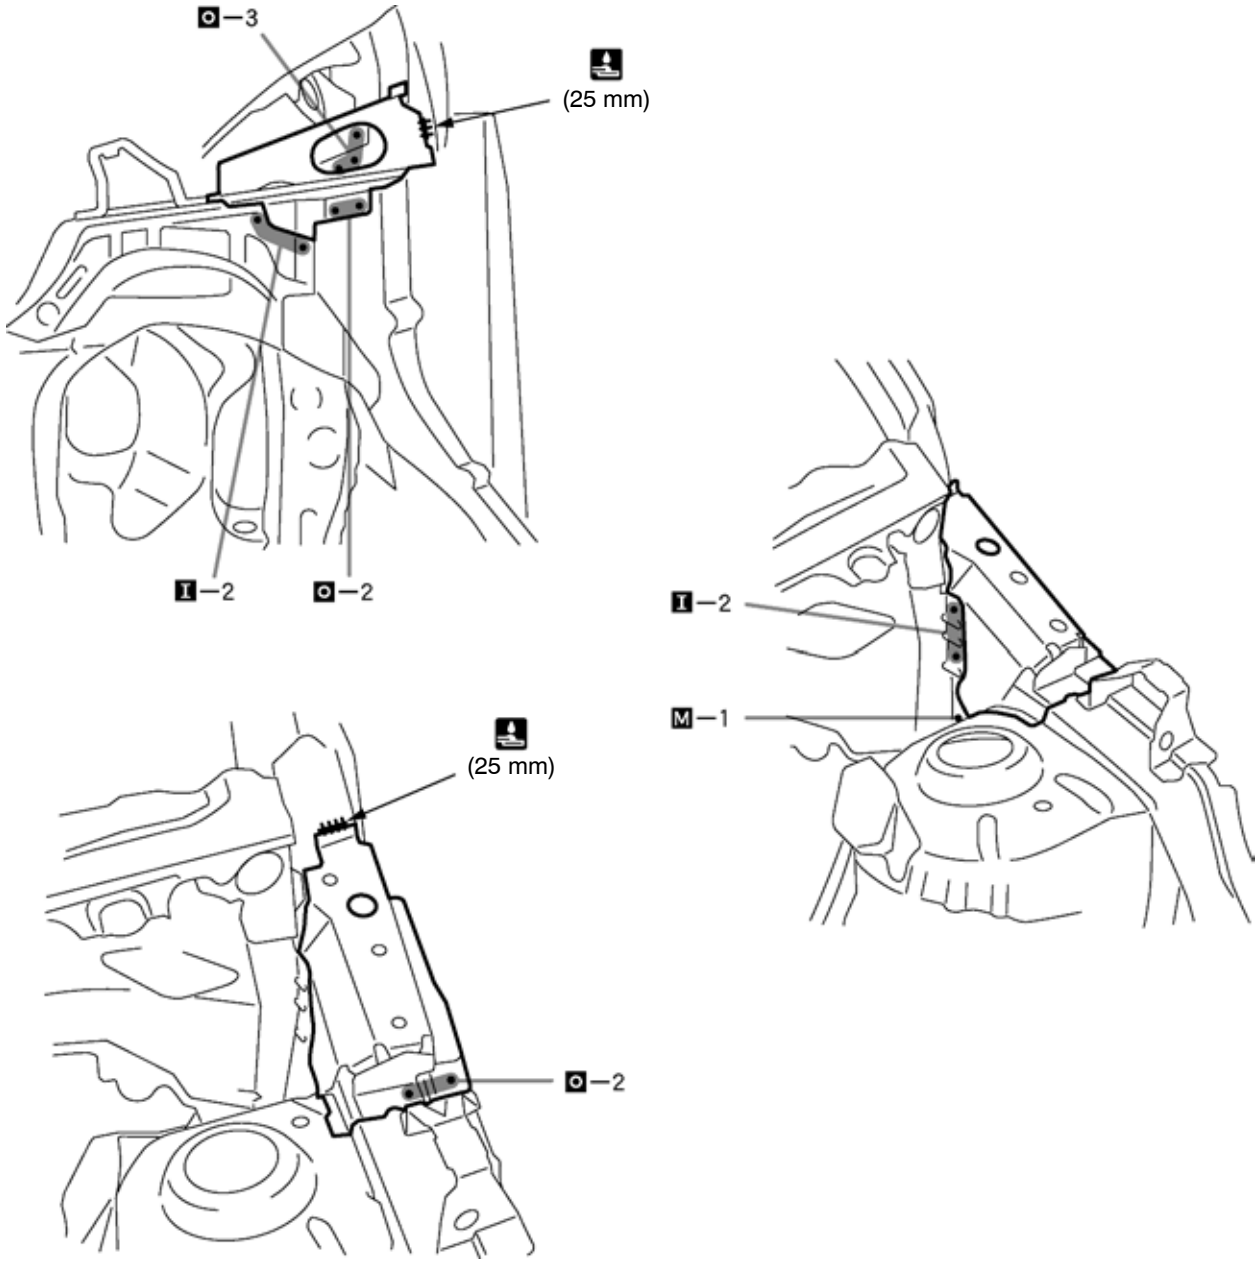


POINT

1 Inspect the fitting of the hood and related parts before welding as this affects the appearance of the finish.


25 mm (0.98 in.)


COWL TOP SIDE UPPER PANEL (ASSY): Sedan

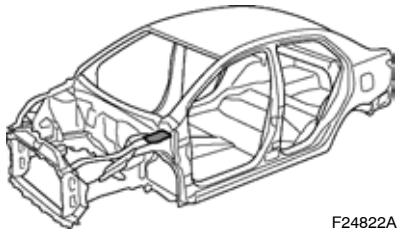

F24822A

REPLACEMENT
With the cowl top side panel removed.

REMOVAL

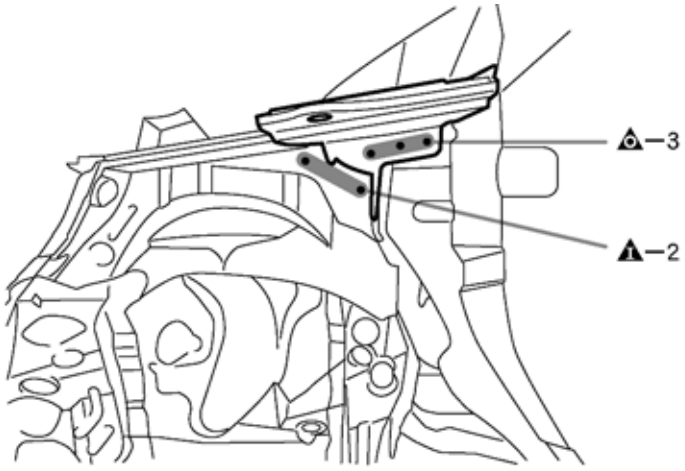

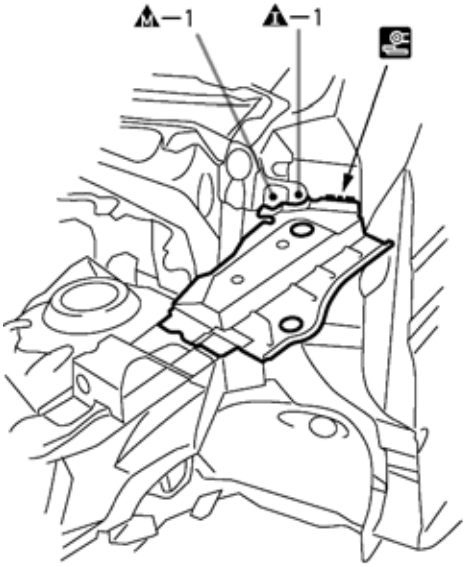


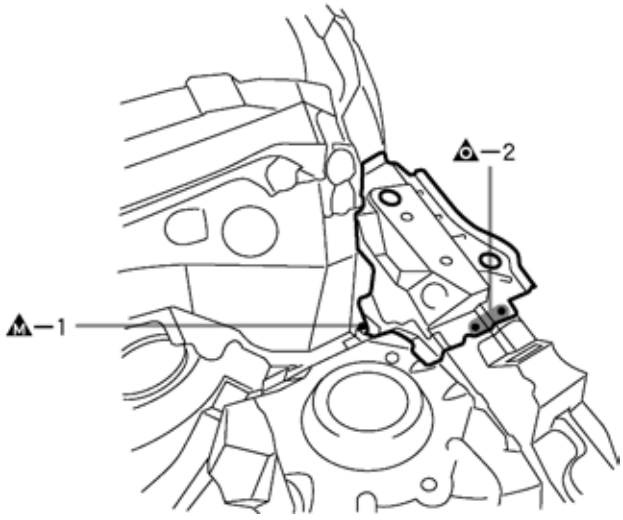



F24822-1

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

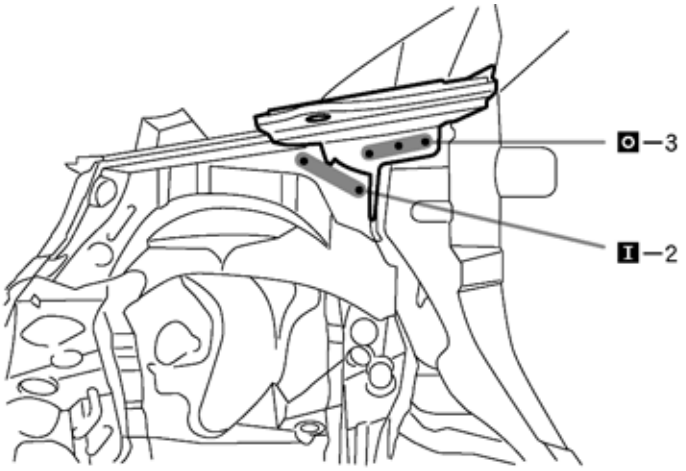

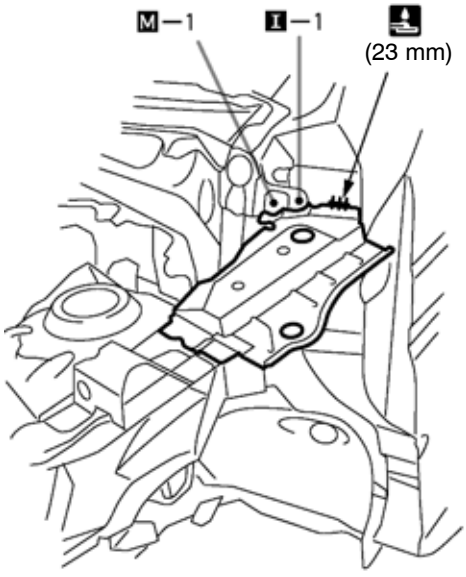

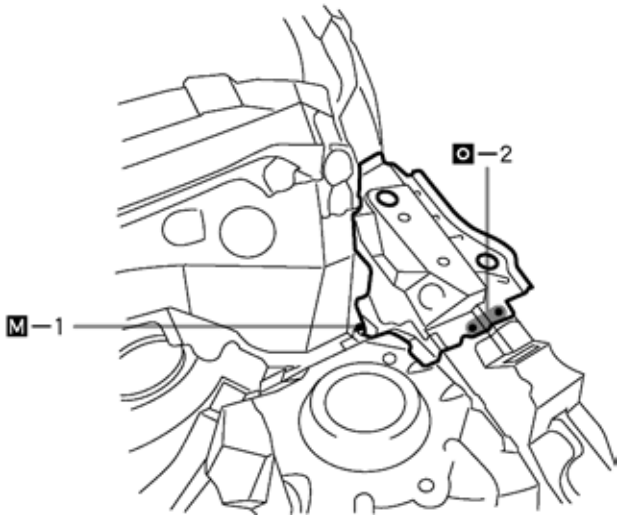

F24822-2

POINT

1 Inspect the fitting of the hood and related parts before welding as this affects the appearance of the finish.

23 mm (0.91 in.)