
BACK DOOR OPENING TROUGH (ASSY): Hatchback


F22865A

REPLACEMENT
With the quarter panel and body lower back panel removed.

REMOVAL

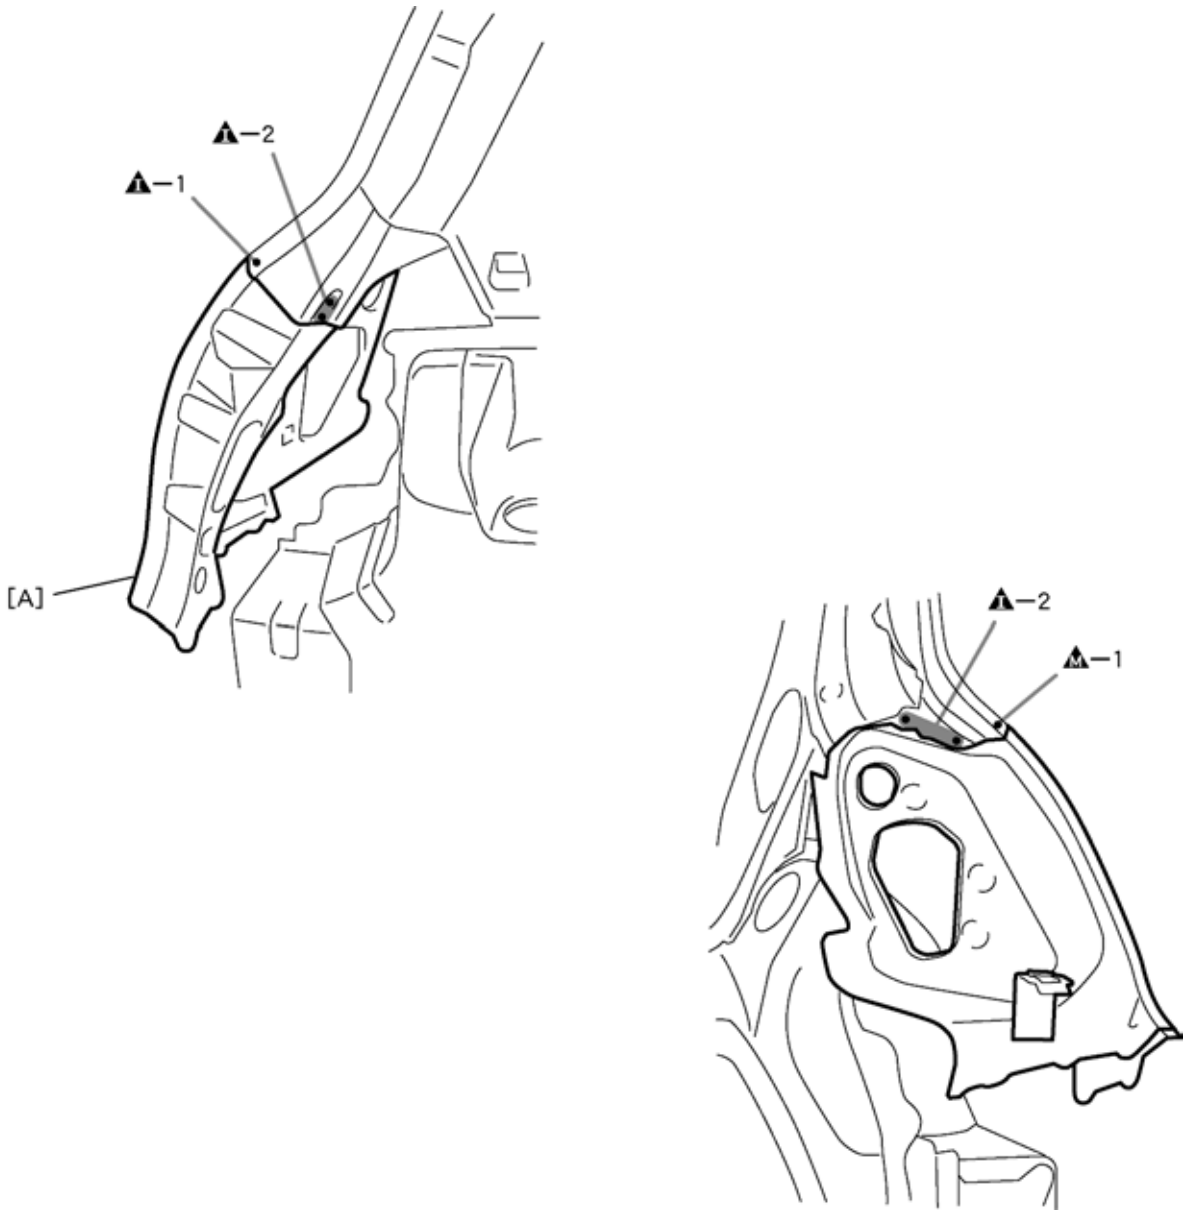


F22865

POINT
1 Remove [A] at the same time.

PART NAME
[A] Back Door Opening Lower Reinforcement

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

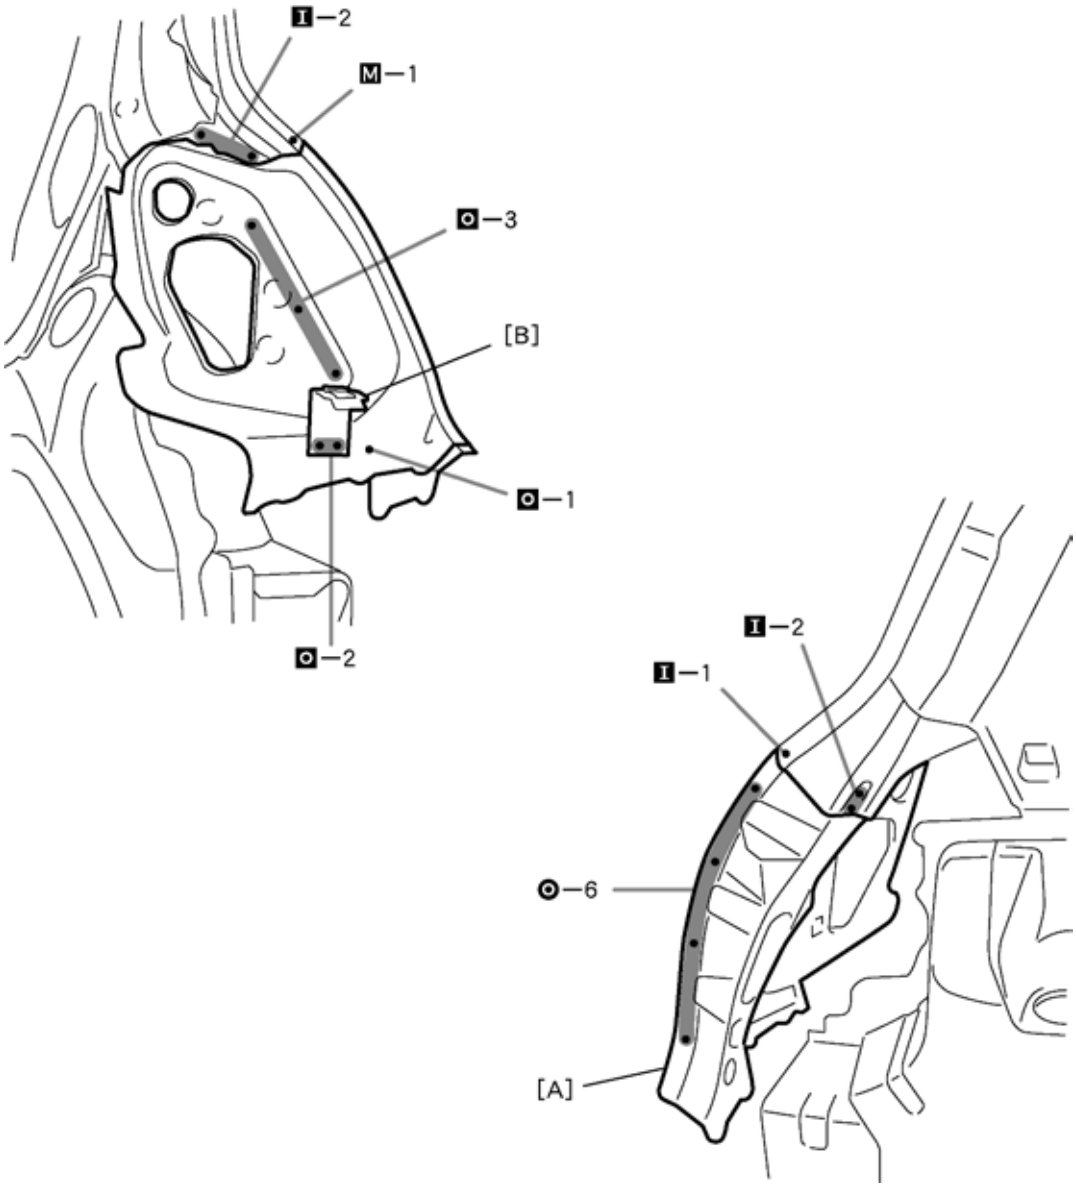

F22866

POINT

1 Inspect the fitting of the back door, rear combination light and other related parts before welding as this affects the appearance of the finish.

PART NAME

[A] Back Door Opening Lower Reinforcement [B] Rear Bumper Side Retainer