

REAR FLOOR PAN EXTENSION (ASSY): Sedan


F24852A

REPLACEMENT
With the body lower back panel removed.

REMOVAL

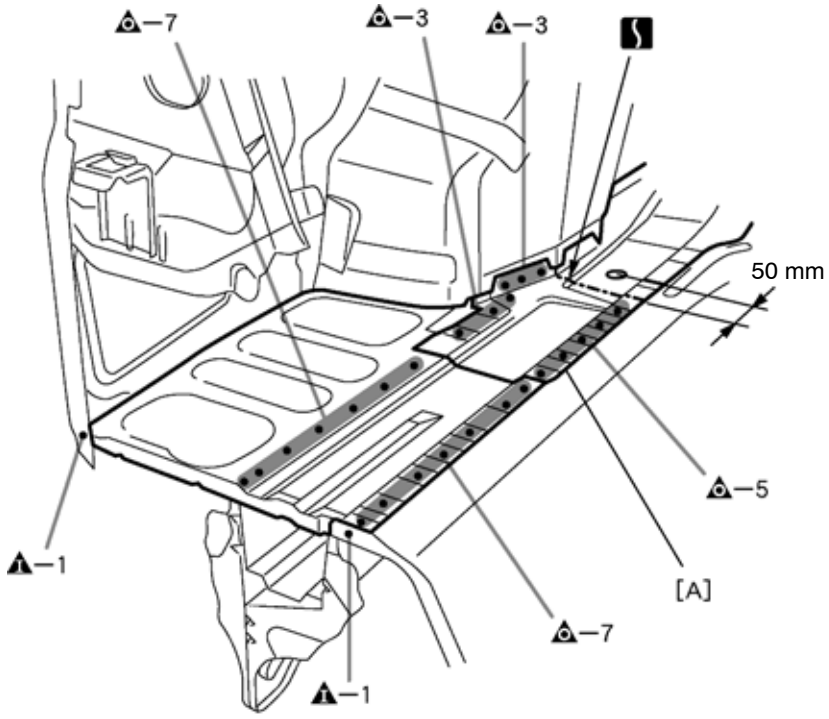

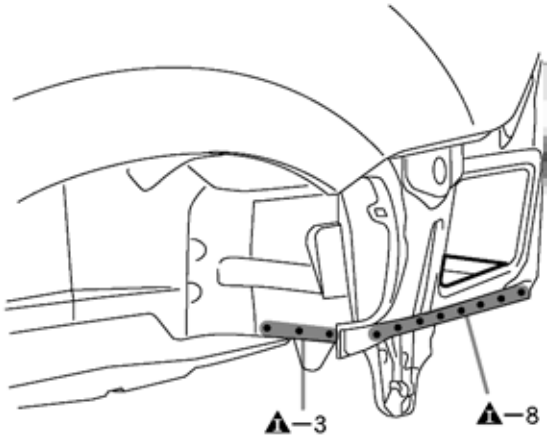


F24852-1

POINT
1 Remove [A] at the same time.

PART NAME
[A] Floor Side Rail Front Panel
50 mm (1.97 in.)

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

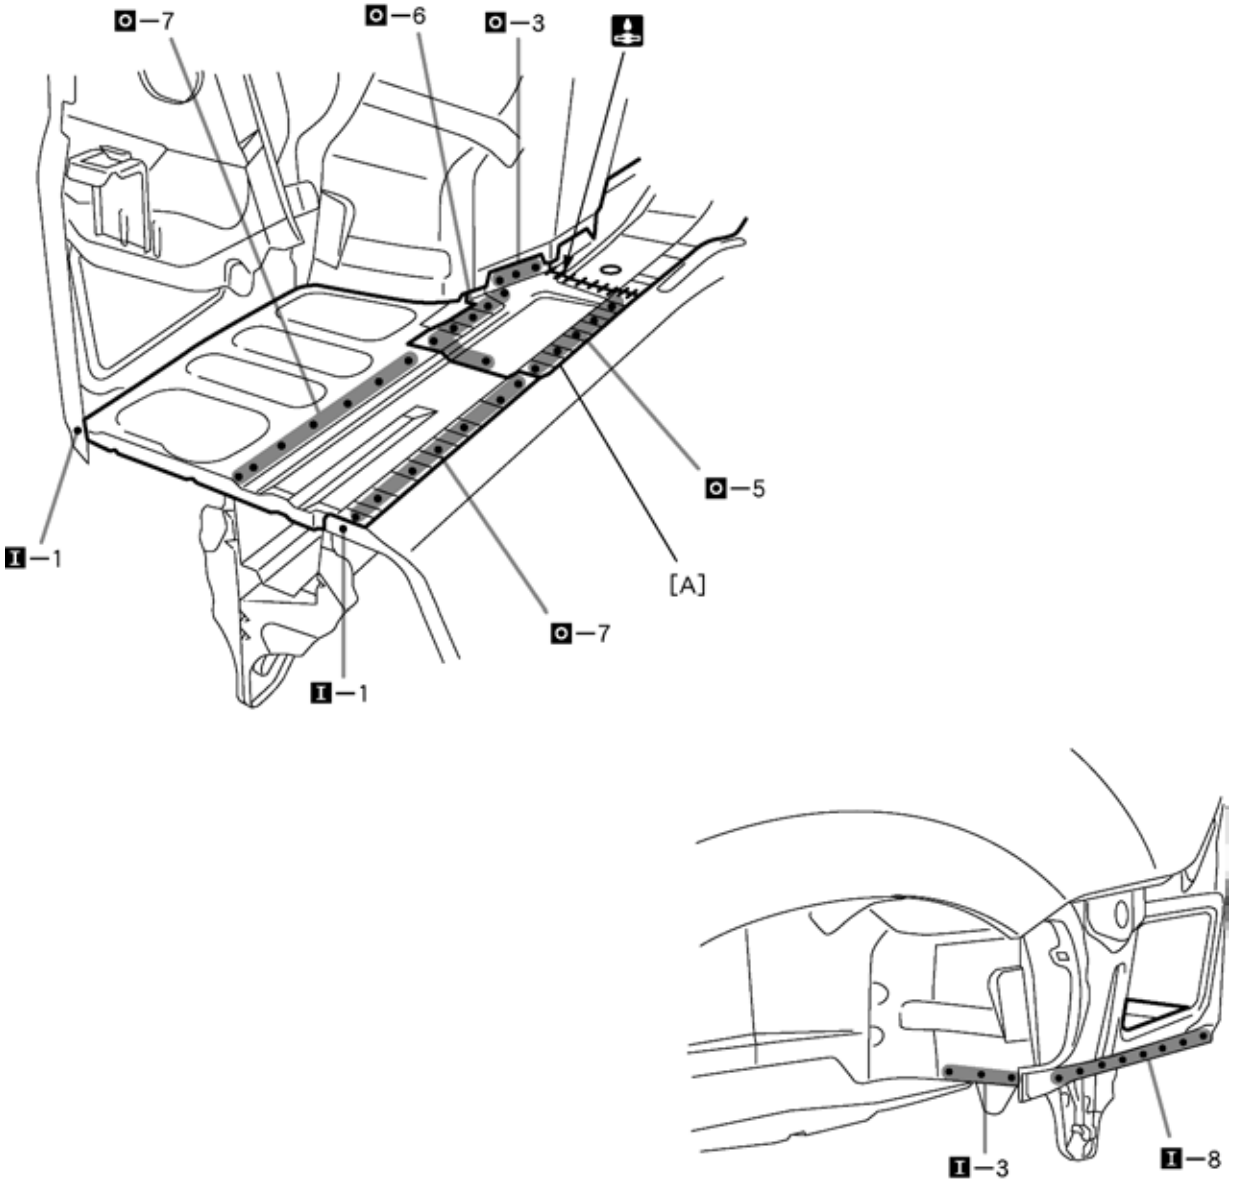

F24852-2

PART NAME

[A] Floor Side Rail Front Panel