


BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS

HINT:
1) *Anti-chipping paint should be applied to some areas before the second coat and to other areas after the top coat.*
2) *Wipe off the paint immediately with a rag soaked in silicone remover if unrelated areas are accidentally coated.*

[Hatchback]

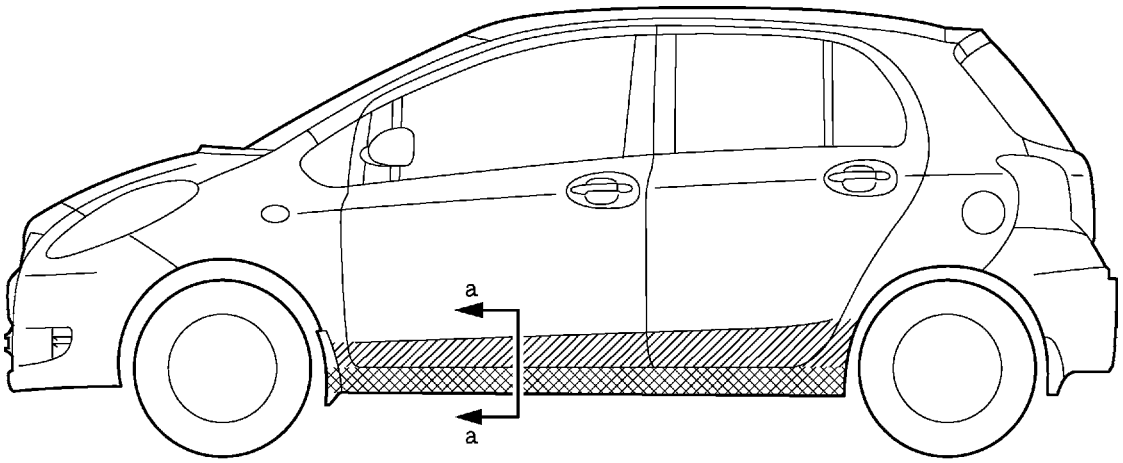

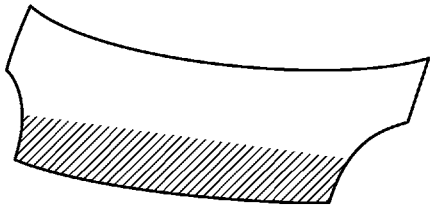




a – a

F23342

	PVC		Soft–Chip (Poly Olefine)	—	—

[Sedan]

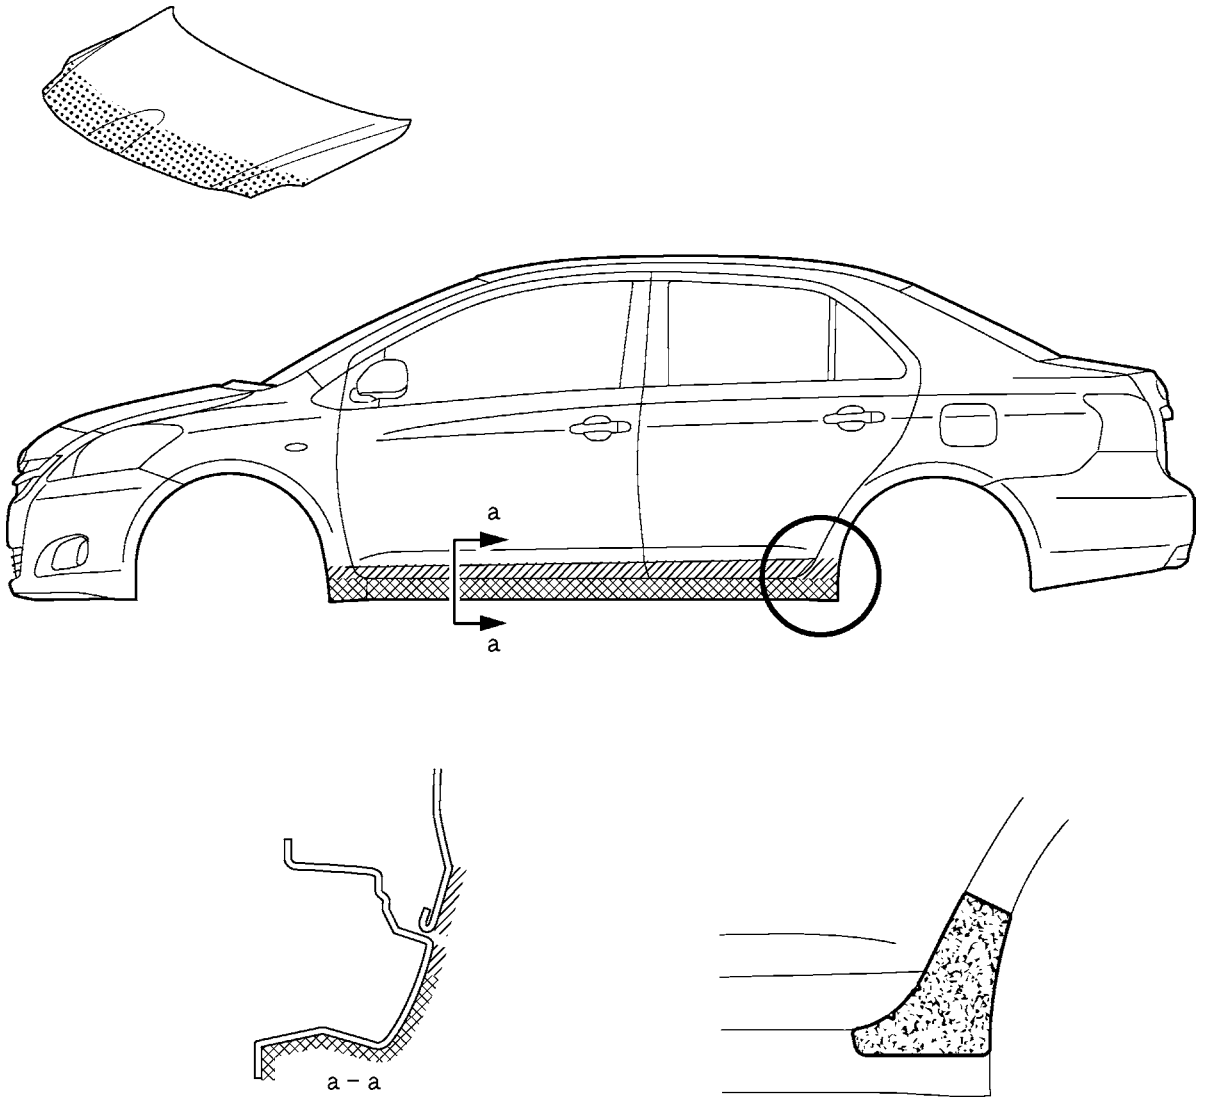

F24811-1

	PVC		Urethane		Adheshion Primer
	Protection Tape	—	—	—	—