

FLOOR SIDE RAIL FRONT PANEL (ASSY): Hatchback


F22869A

REPLACEMENT
With the body lower back panel removed.

REMOVAL

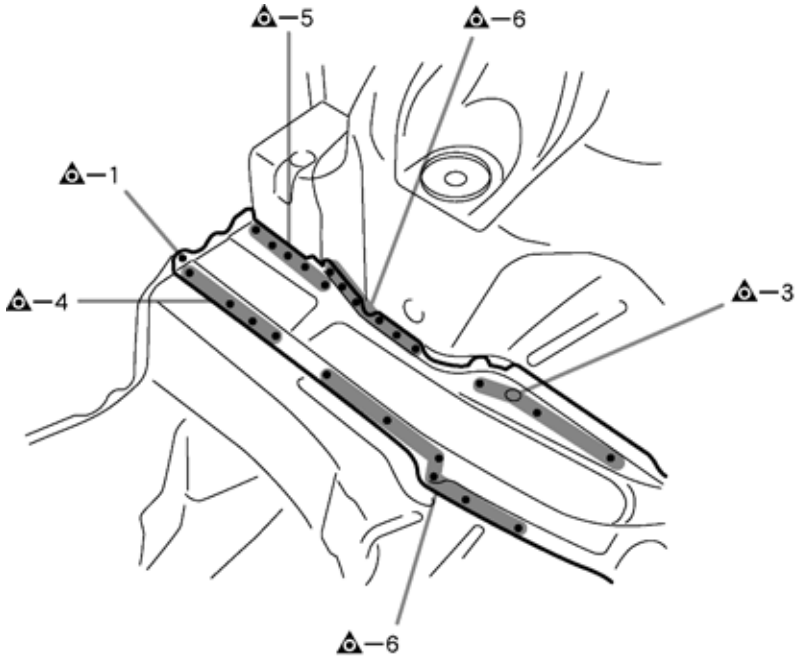


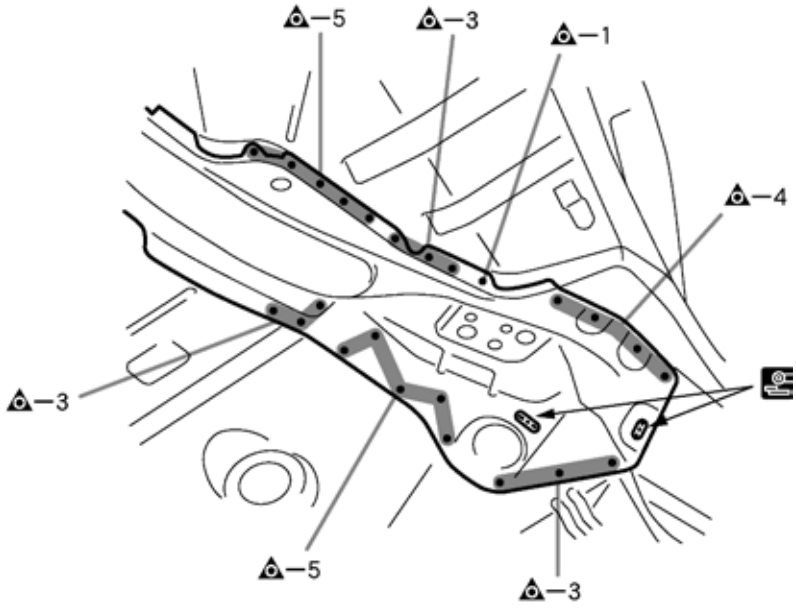

F23327

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

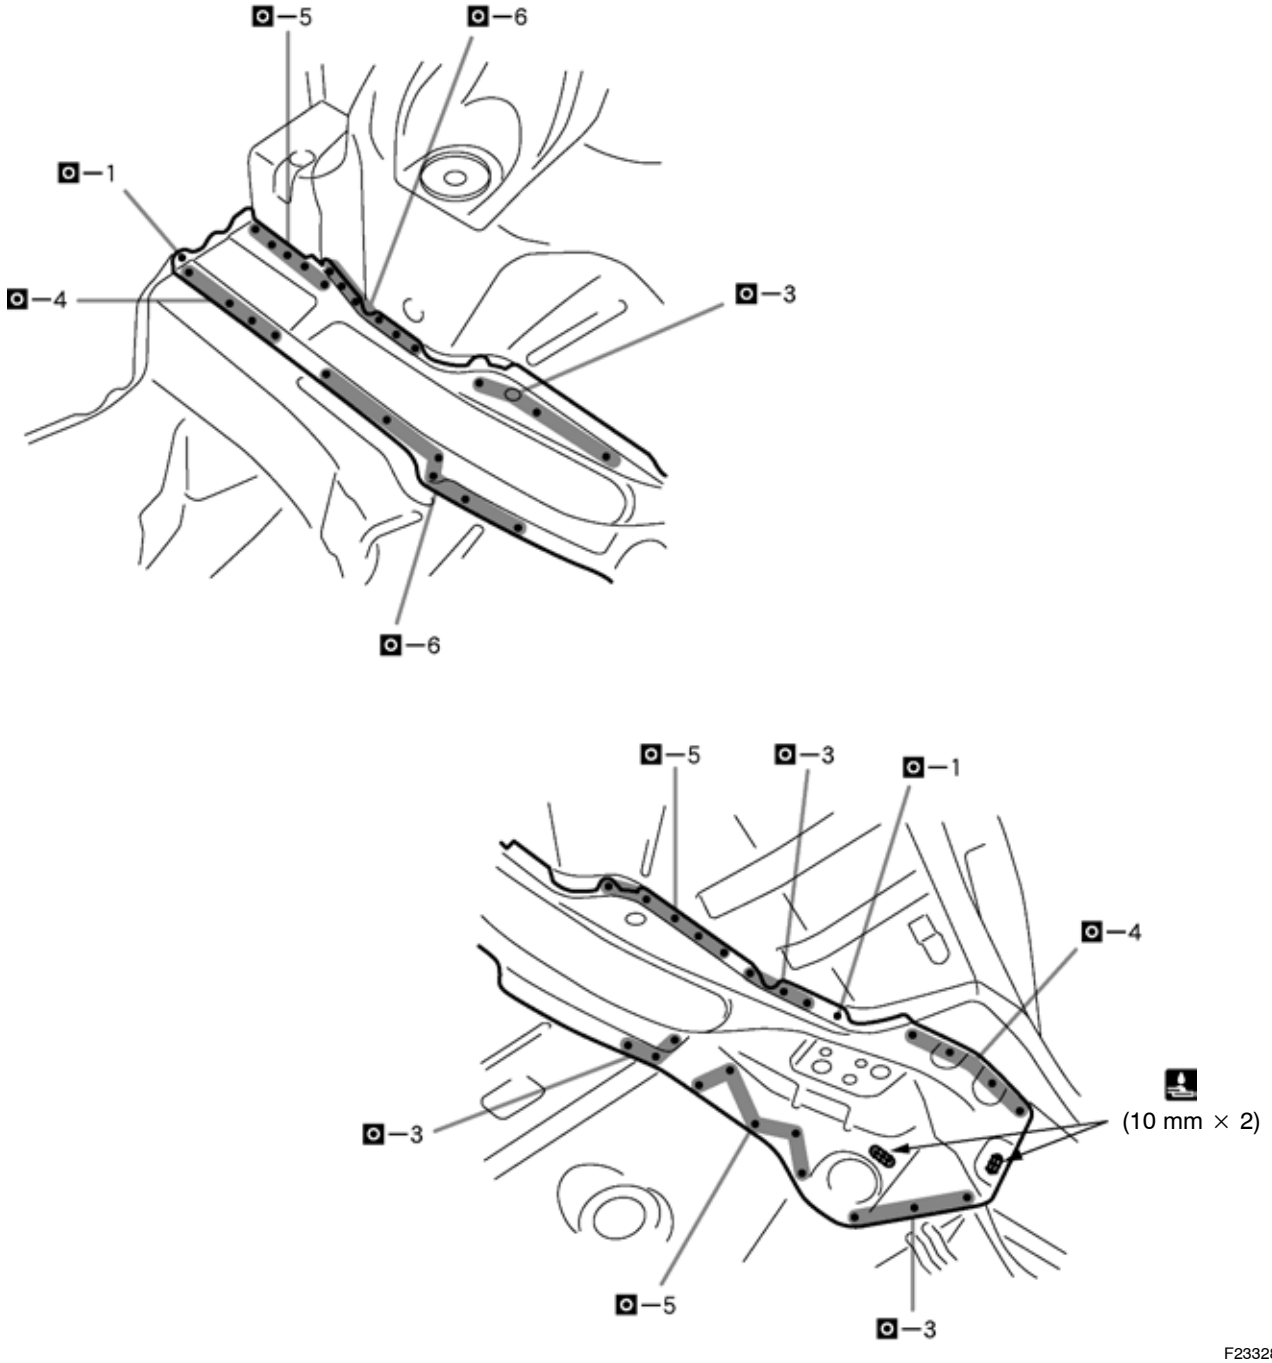


10 mm (0.39 in.)

FLOOR SIDE RAIL FRONT PANEL (ASSY): Sedan


F24846A

REPLACEMENT
With the body lower back panel removed.

REMOVAL

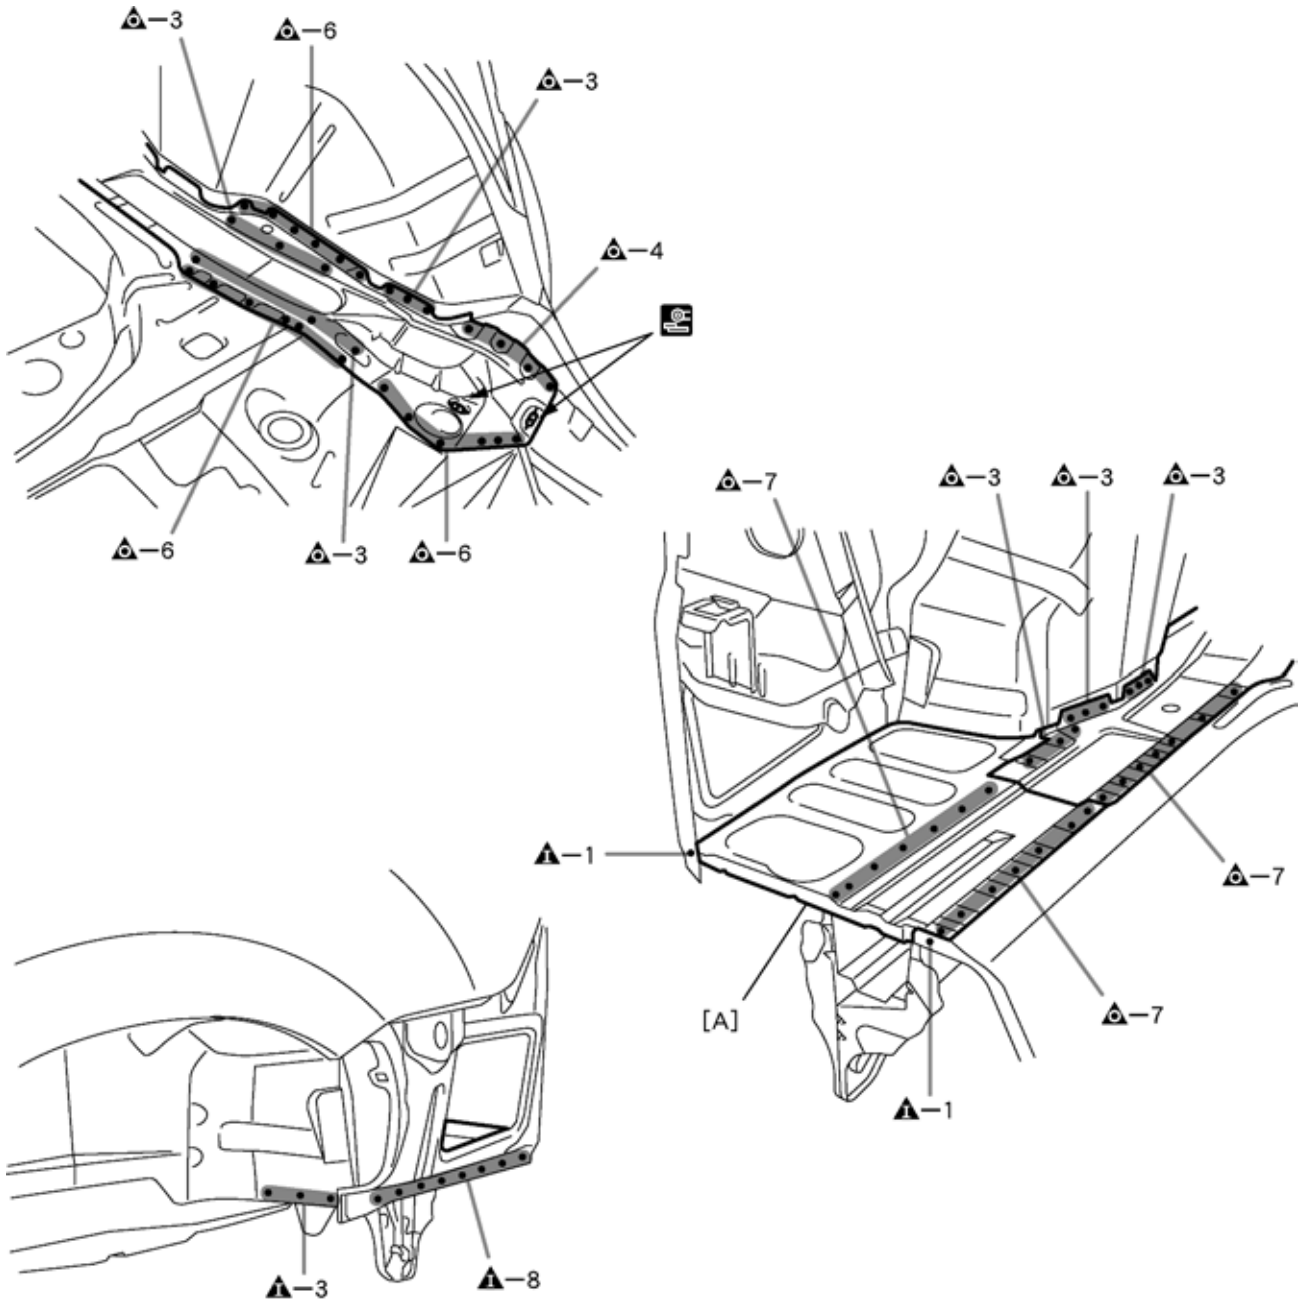


F24846-1

POINT
1 Remove [A] at the same time.

PART NAME
[A] Rear Floor Pan Extension

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply polyurethane foam to the corresponding parts.
- After welding, apply body sealer and undercoating to the corresponding parts.
- After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

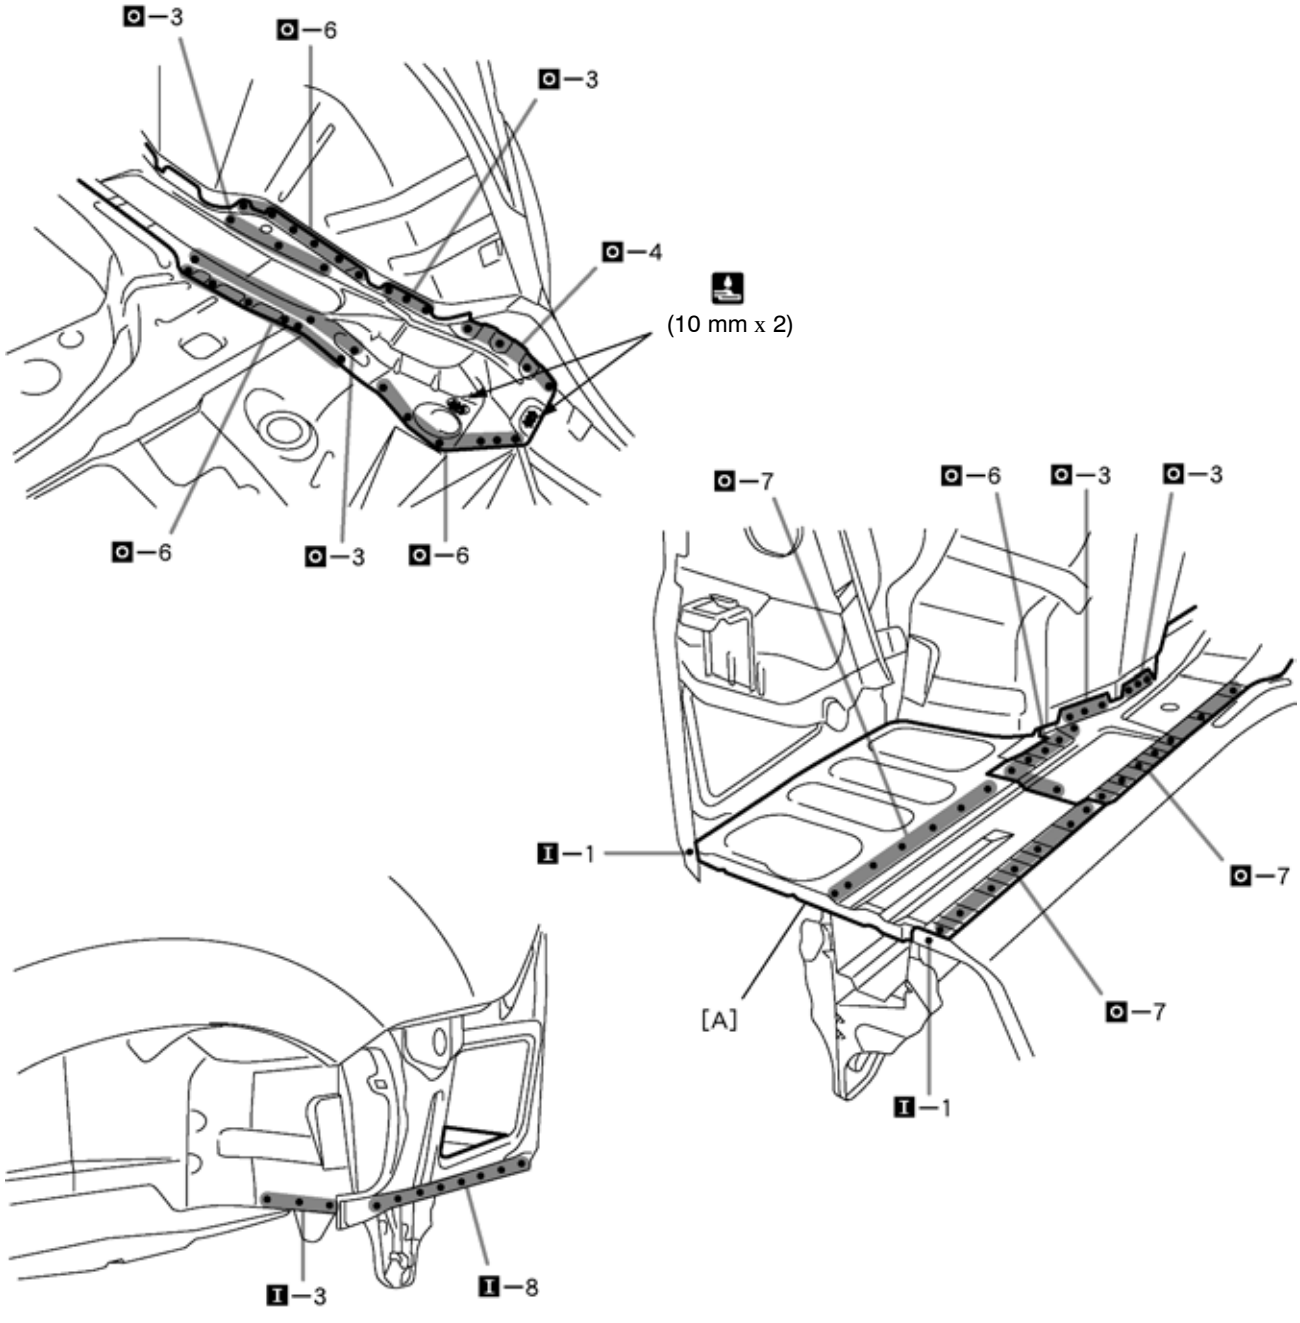

10 mm (0.39 in.)