
BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

Hatchback

(Three-Dimensional Distance)

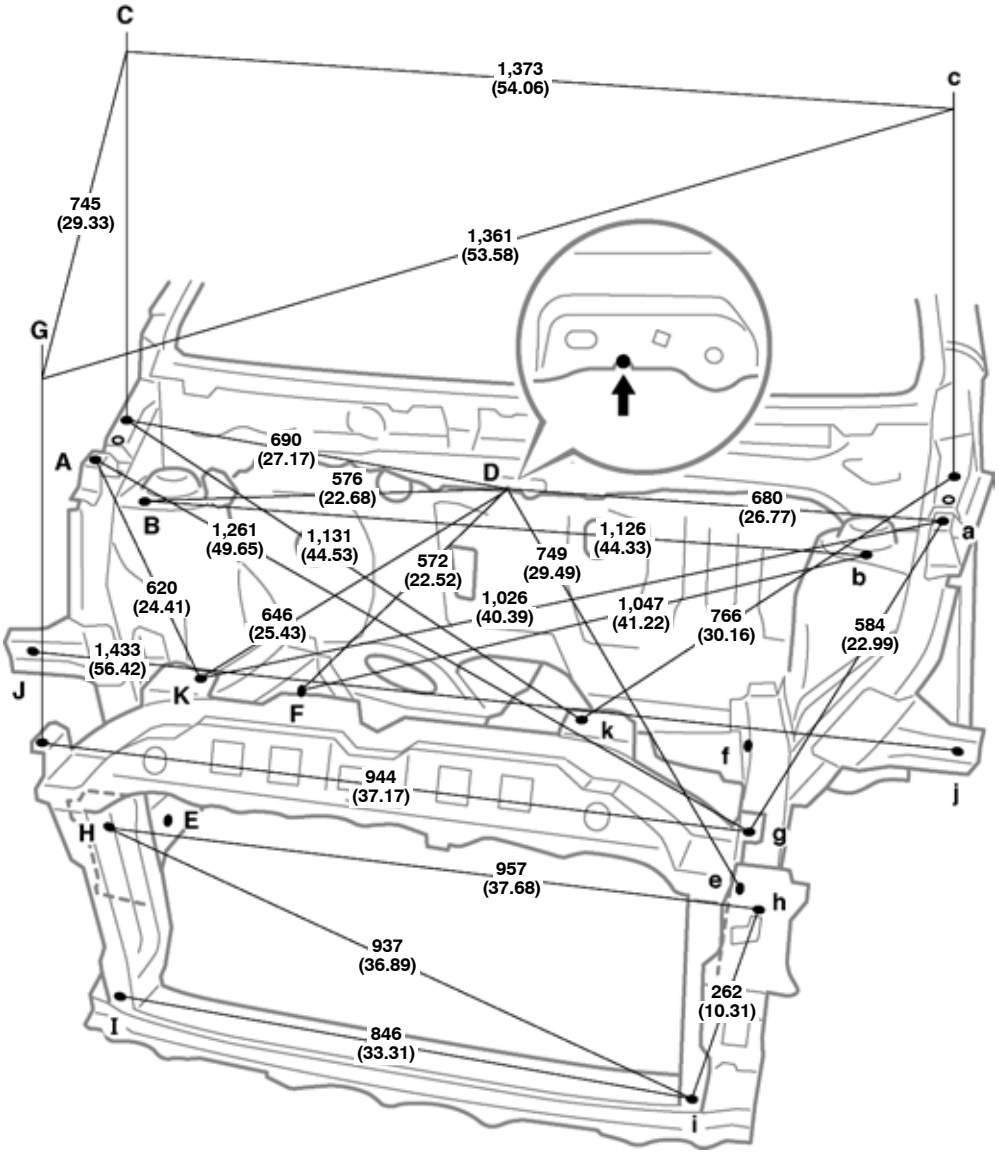

Vehicle Dimensions

A-a	A-C or a-c	B-C or b-c	B-c or b-C	B-K or b-k	B-k or b-K	K-k
1,324 (52.13)	170 (6.69)	209 (8.23)	1,261 (49.65)	564 (22.20)	942 (37.09)	505 (19.88)

Height from Imaginary Standard Line

A, a	C, c	G, g
810 (31.89)	815 (32.09)	614 (24.17)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	M6 (0.24)	G, g	Headlight bracket standard hole	ø 10 (0.39)
B, b	Front spring support hole–inner	ø 11 (0.43)	H, h	Radiator side support installation hole	ø 6.3 (0.248)
C, c	Hood hinge installation nut-rear	M8 (0.31)	I, i	Radiator seal installation hole	ø 9 (0.35)
D	Cowl panel center mark	—	J, j	Front fender mounting bracket standard hole	ø 10 (0.39)
E, e	Front side member standard hole	ø 15 (0.59)	K, k	Front bumper installation hole	ø 7 (0.28)
F, f	Front side member standard hole	ø 10 (0.39)	—	—	—

BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

Sedan

(Three-Dimensional Distance)

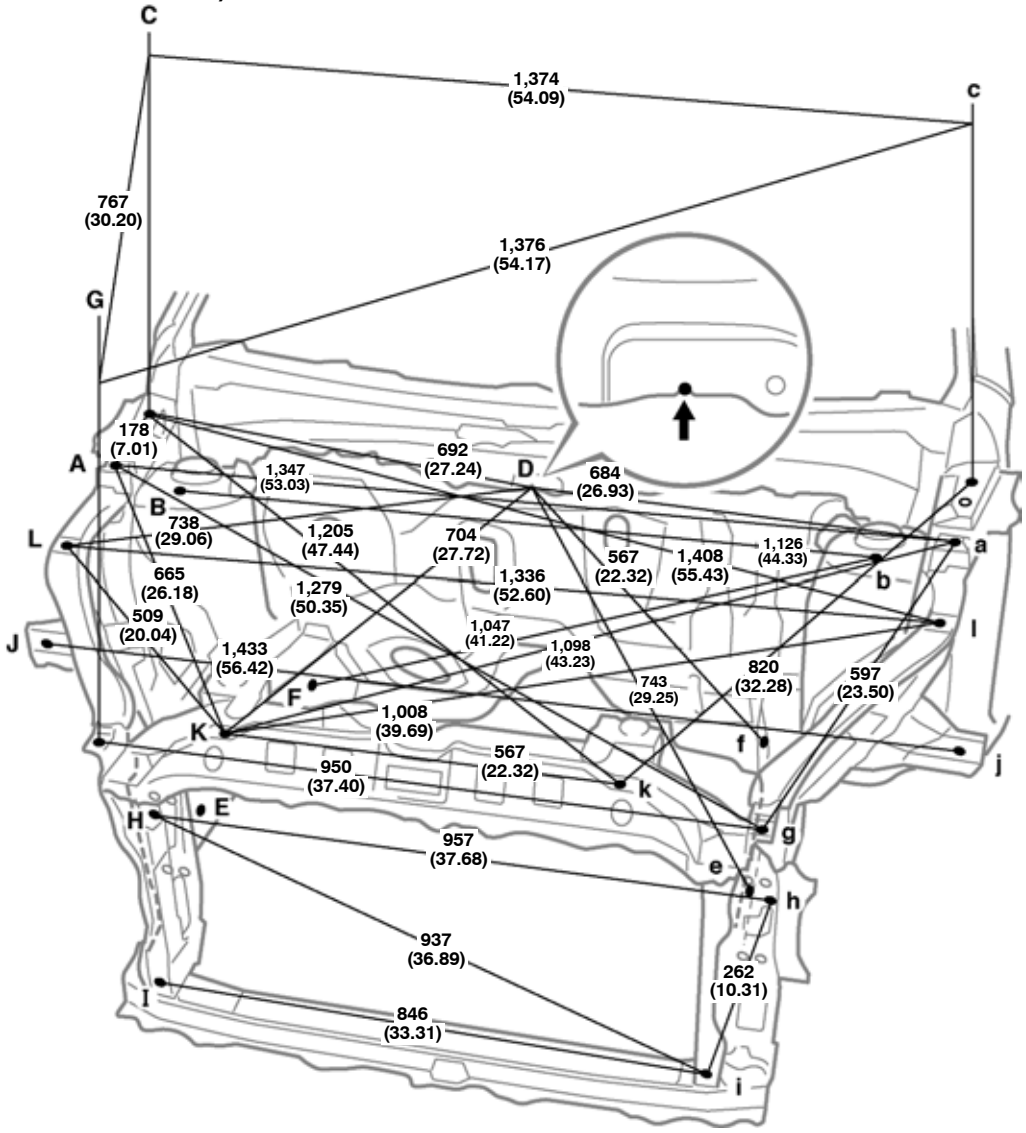

Vehicle Dimensions

B-C or b-c	B-c or b-C	B-D or b-D	B-K or b-k	B-k or b-K	C-L or c-l
223 (8.78)	1,264 (49.76)	575 (22.64)	998 (39.29)	597 (23.50)	381 (15.00)

Height from imaginary standard line

A, a	C, c	G, g
778 (30.63)	792 (31.18)	615 (24.21)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	M6 (0.24)	G, g	Headlight bracket installation hole	□9 (0.35)
B, b	Front spring support hole-inner	ø11 (0.43)	H, h	Radiator side support inatallation hole	ø6.3 (0.248)
C, c	Hood hinge installation nut-rear	M8 (0.31)	I, i	Radiator seal installation hole	ø9 (0.35)
D	Cowl panel center mark	—	J, j	Front fender mounting bracket standard hole	ø10 (0.39)
E, e	Front side member standard hole	ø15 (0.59)	K, k	Radiator upper support standard hole	ø13 (0.51)
F, f	Front side member standard hole	ø10 (0.39)	L, l	Front fender installation nut	M6 (0.24)

BODY OPENING AREAS (Side View)
Hatchback 3 Door

(Three-Dimensional Distance)

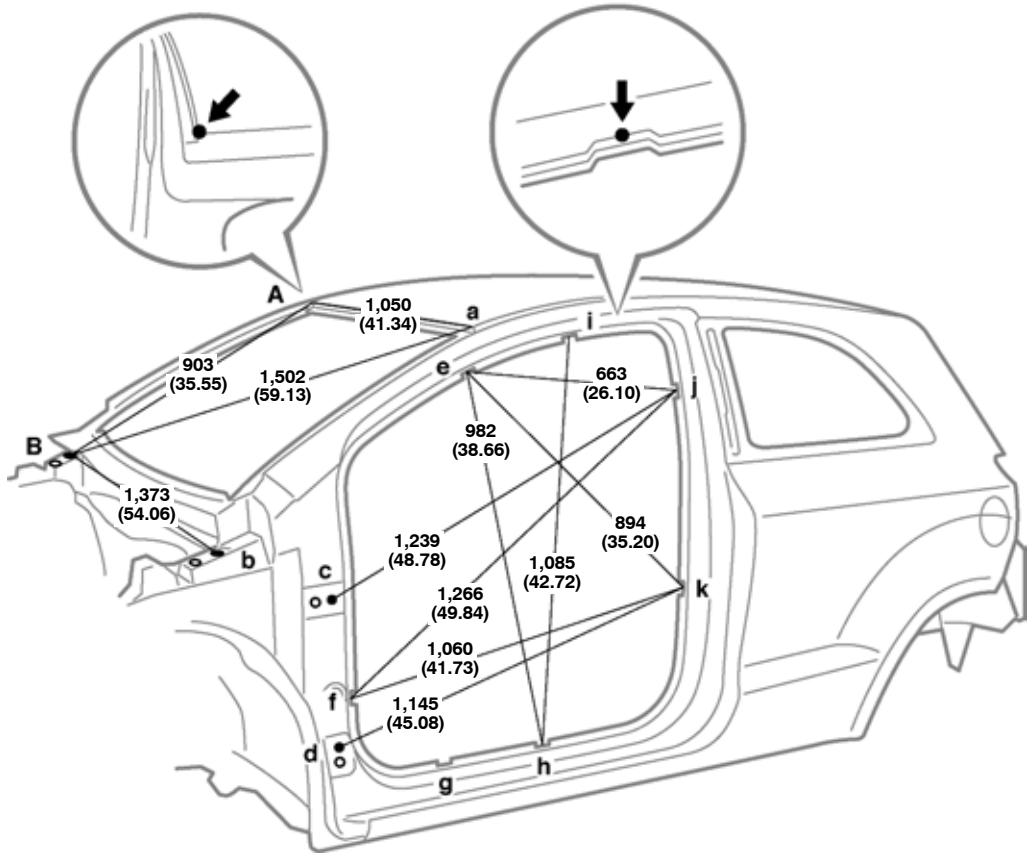

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,147 (45.16)	1,379 (54.29)	1,417 (55.79)	1,417 (55.79)	1,090 (42.91)	1,258 (49.53)	1,395 (54.92)

E-f or e-F	E-h or e-H	E-j or e-J	E-k or e-K	F-j or f-J	F-k or f-K	G-h or g-H	H-i or h-I	J-k or j-K
1,532 (60.31)	1,609 (63.35)	1,372 (54.02)	1,549 (60.98)	1,826 (71.89)	1,745 (68.70)	1,440 (56.69)	1,650 (64.96)	1,429 (56.26)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	G, g	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	H, h	Rocker panel assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	J, j	Quarter panel assembly mark	—
E, e	Front body pillar assembly mark	—	K, k	Quarter panel assembly mark	—
F, f	Front body pillar assembly mark	—	—	—	—

BODY OPENING AREAS (Side View: Front)
Hatchback 5 Door

(Three-Dimensional Distance)

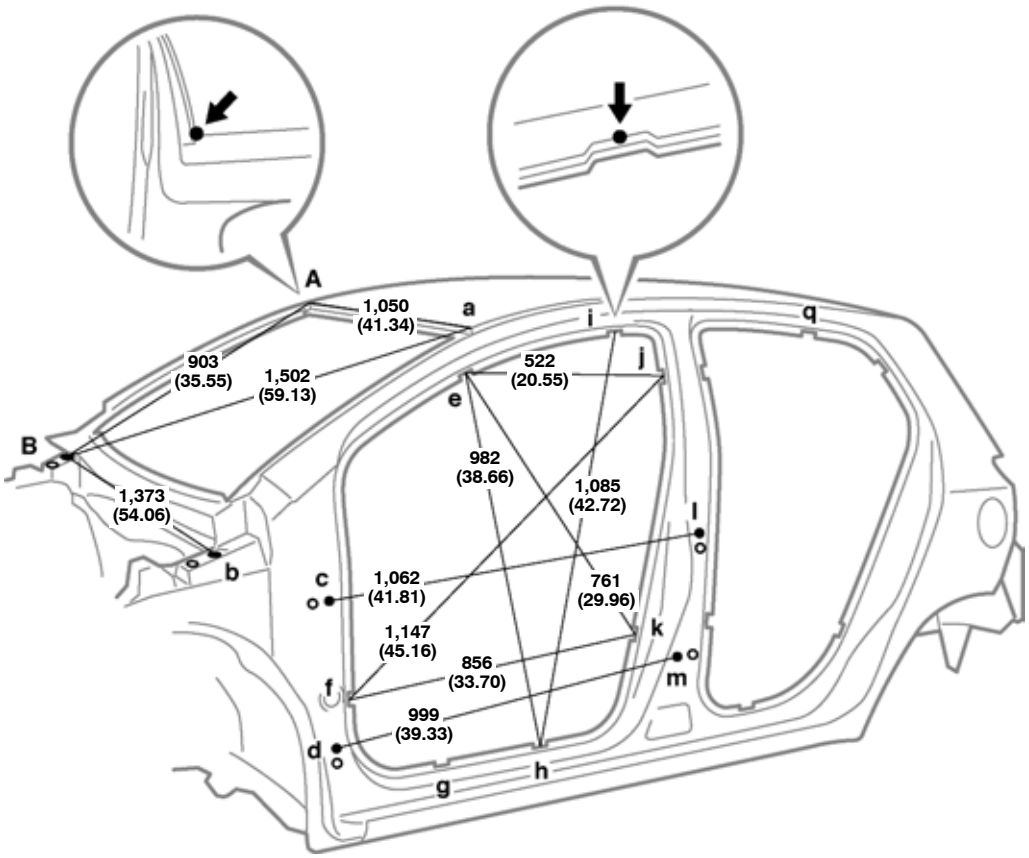

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,147 (45.16)	1,379 (54.29)	1,417 (55.79)	1,417 (55.79)	1,090 (42.91)	1,263 (49.72)	1,391 (54.76)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	I-q or i-Q	J-k or j-K
1,532 (60.31)	1,609 (63.35)	1,312 (51.65)	1,748 (68.82)	1,628 (64.09)	1,650 (64.96)	1,260 (49.61)	1,431 (56.34)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	Q, q	Roof side rail assembly mark	—

BODY OPENING AREAS (Side View: Rear)
Hatchback 5 Door

(Three-Dimensional Distance)

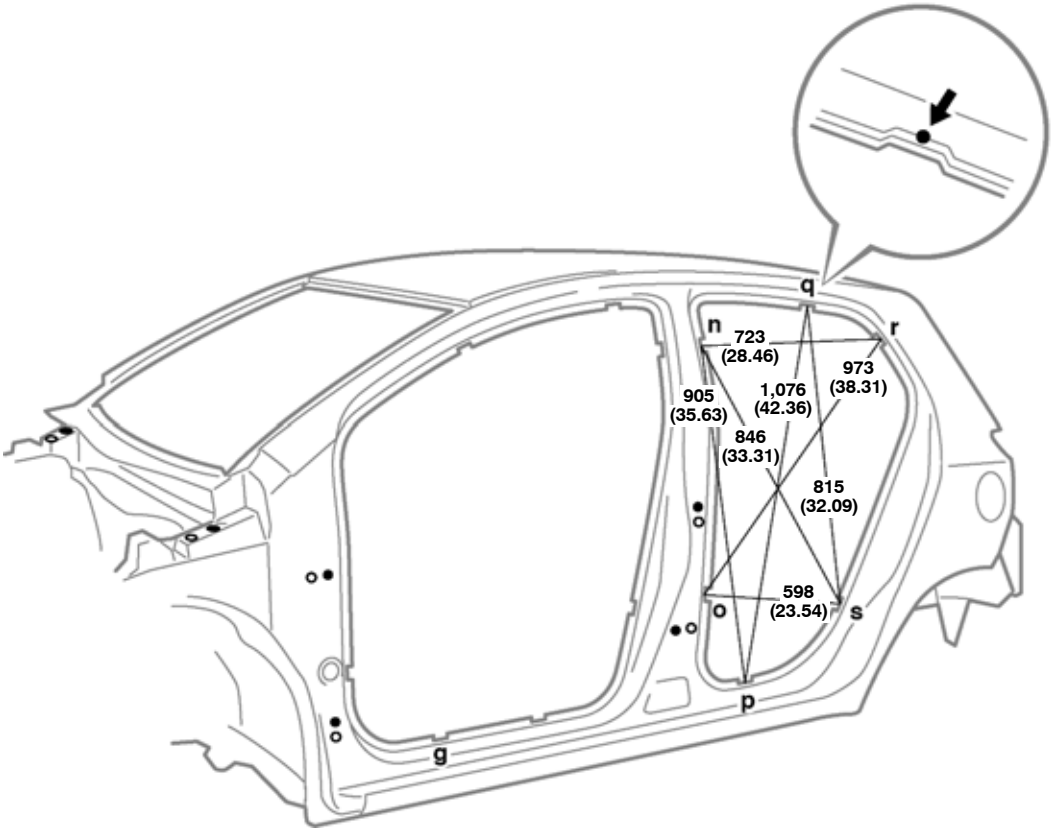

Vehicle Dimensions

N-n	O-o	P-p	Q-q	R-r	S-s
1,263 (49.72)	1,381 (54.37)	1,417 (55.79)	1,068 (42.05)	1,130 (44.49)	1,405 (55.31)

G-p or g-P	N-r or n-R	N-s or n-S	O-r or o-R	O-s or o-S	P-q or p-Q	R-s or r-S
1,717 (67.60)	1,397 (55.00)	1,578 (62.13)	1,584 (62.36)	1,516 (59.69)	1,634 (64.33)	1,451 (57.13)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	—
P, p	Quarter panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View: Front)
Sedan

(Three-Dimensional Distance)

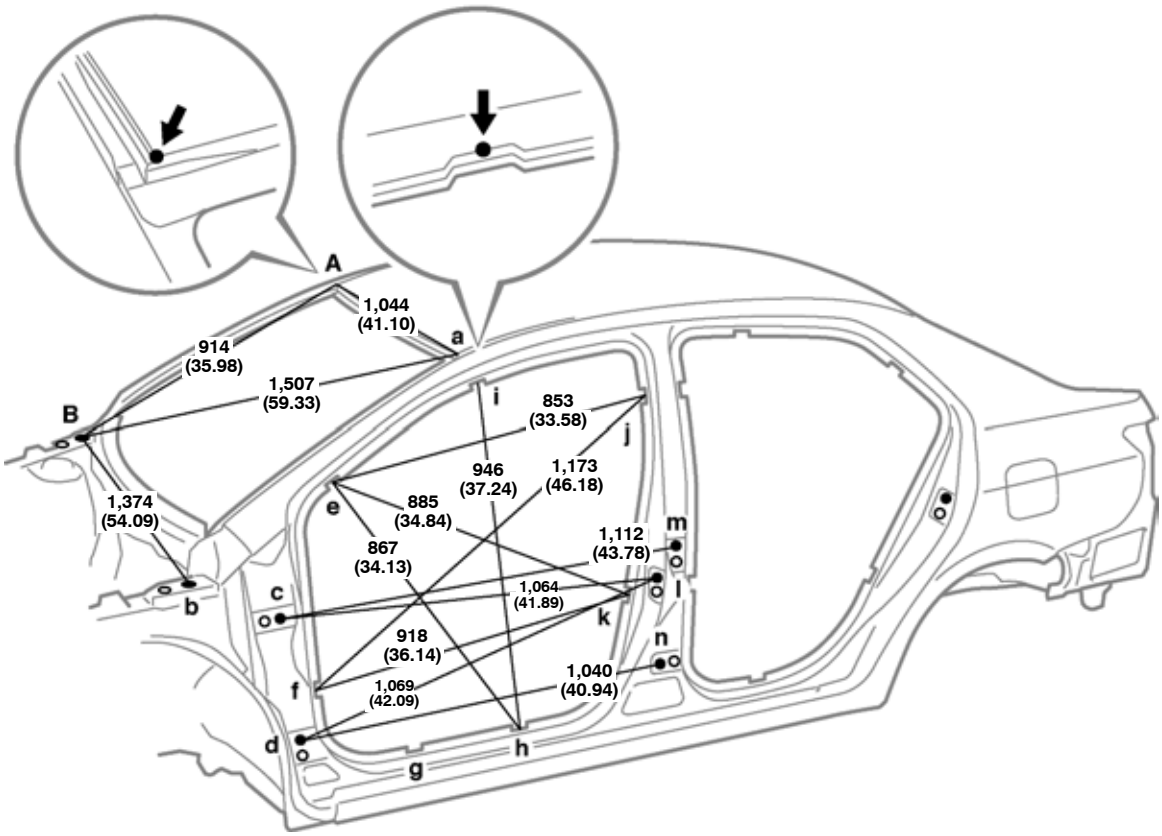

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-i	J-j	K-k	L-l
1,266 (49.84)	1,378 (54.25)	1,418 (55.83)	1,418 (55.83)	1,128 (44.41)	1,240 (48.82)	1,378 (54.25)	1,480 (58.27)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	H-i or h-I	J-k or j-K
1,443 (56.81)	1,596 (62.83)	1,515 (59.65)	1,756 (69.13)	1,656 (65.20)	1,579 (62.17)	1,403 (55.24)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	N, n	Rear door hinge installation nut	M8 (0.31)

BODY OPENING AREAS (Side View: Rear)
Sedan

(Three-Dimensional Distance)

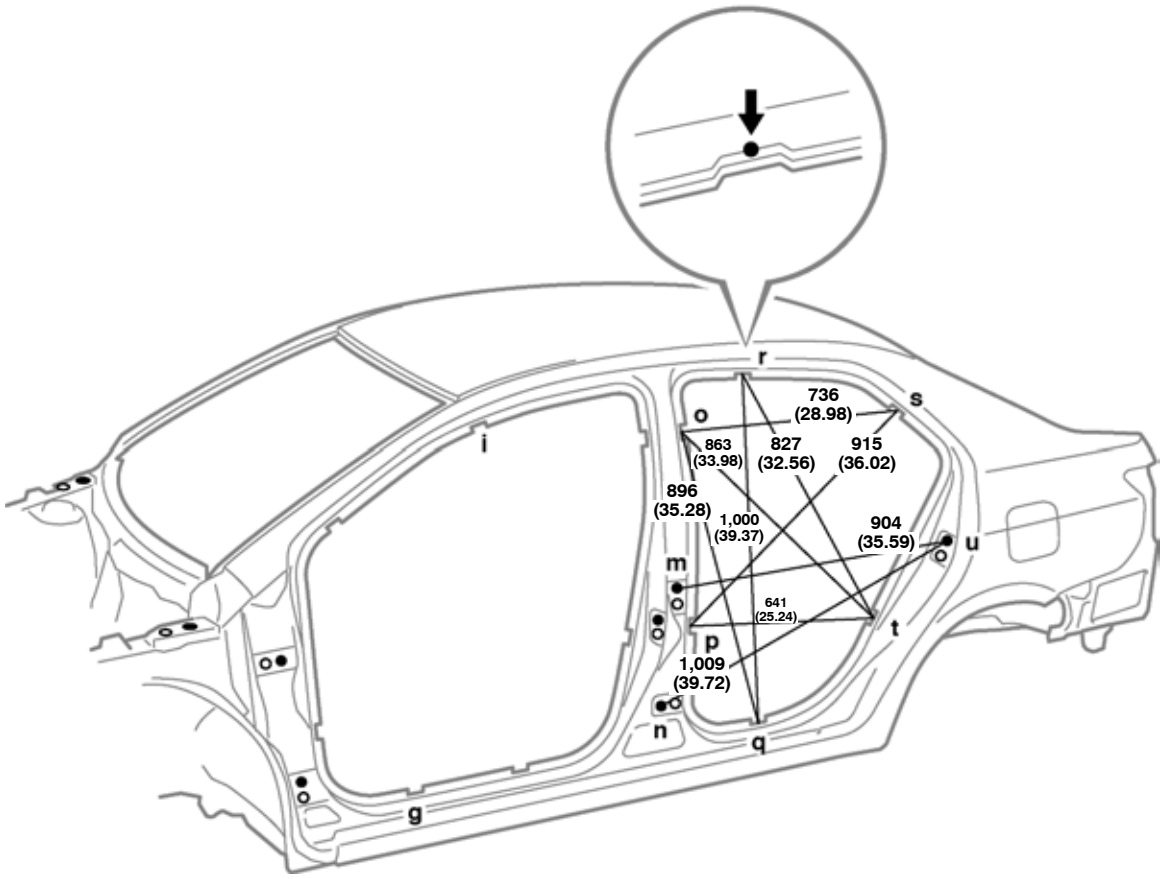

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,240 (48.82)	1,373 (54.06)	1,418 (55.83)	1,084 (42.68)	1,197 (47.13)	1,405 (55.31)	1,489 (58.62)

G-q or g-Q	I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,770 (69.69)	1,375 (54.13)	1,424 (56.06)	1,577 (62.09)	1,529 (60.20)	1,593 (62.72)	1,430 (56.30)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	Q, q	Rocker panel assembly mark	—
I, i	Roof side rail assembly mark	—	R, r	Roof side rail assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mrak	—
N, n	Rear door hinge installation nut	M8 (0.31)	T, t	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
P, p	Center body pillar assembly mark	—	—	—	—

BODY OPENING AREAS (Rear View)
Hatchback 3 Door

(Three-Dimensional Distance)

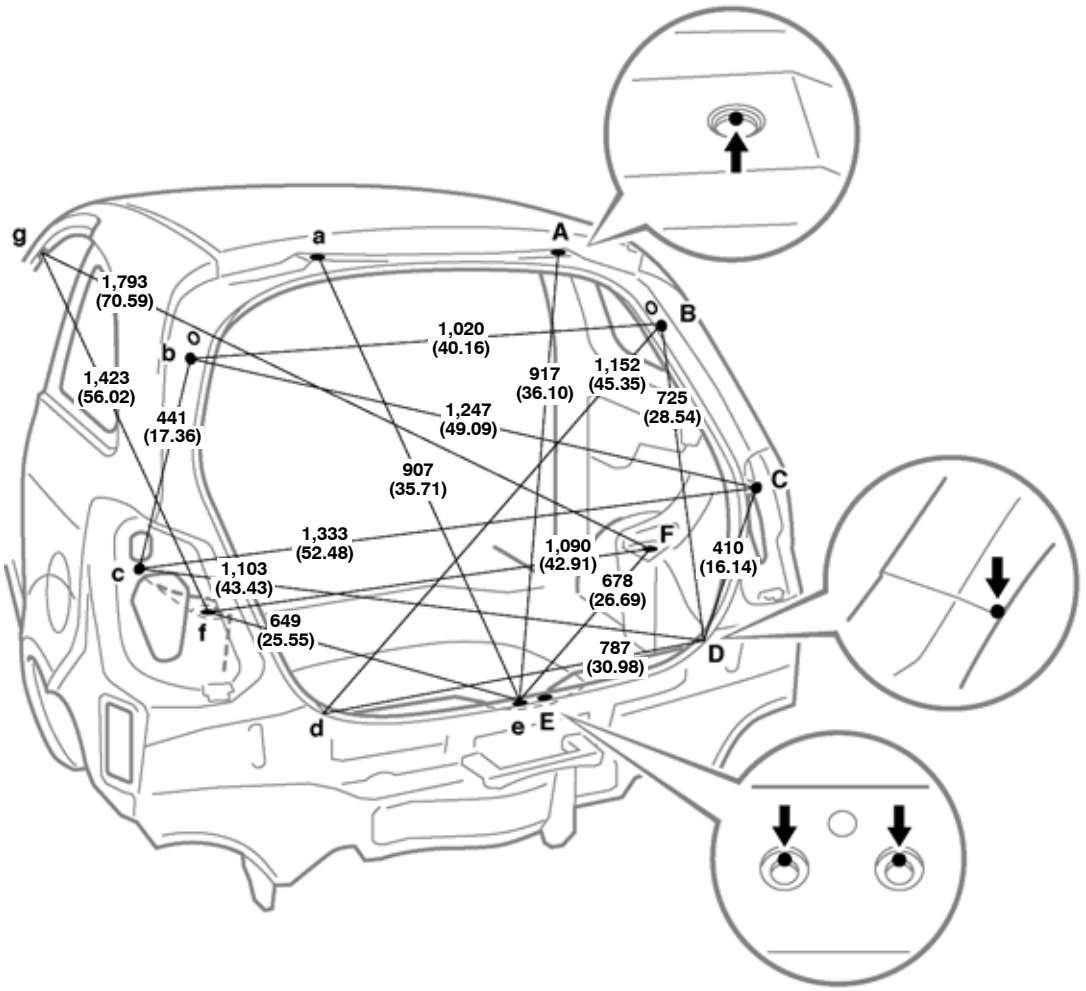


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole	ø 10.2 (0.402): RH ø 10.2 (0.402) × 12 (0.47): LH	E, e	Back door lock striker installation nut	M8 (0.31)
B, b	Back door stay installation nut	M6 (0.24)	F, f	Rear shock absorber installation hole–inner	ø 18 (0.71)
C, c	Back door opening trough standard hole	ø 10 (0.39)	G, g	Roof side rail assembly mark	—
D, d	Back door opening trough/Body lower back panel adjoining point	—	—	—	—

BODY OPENING AREAS (Rear View)
Hatchback 5 Door

(Three-Dimensional Distance)

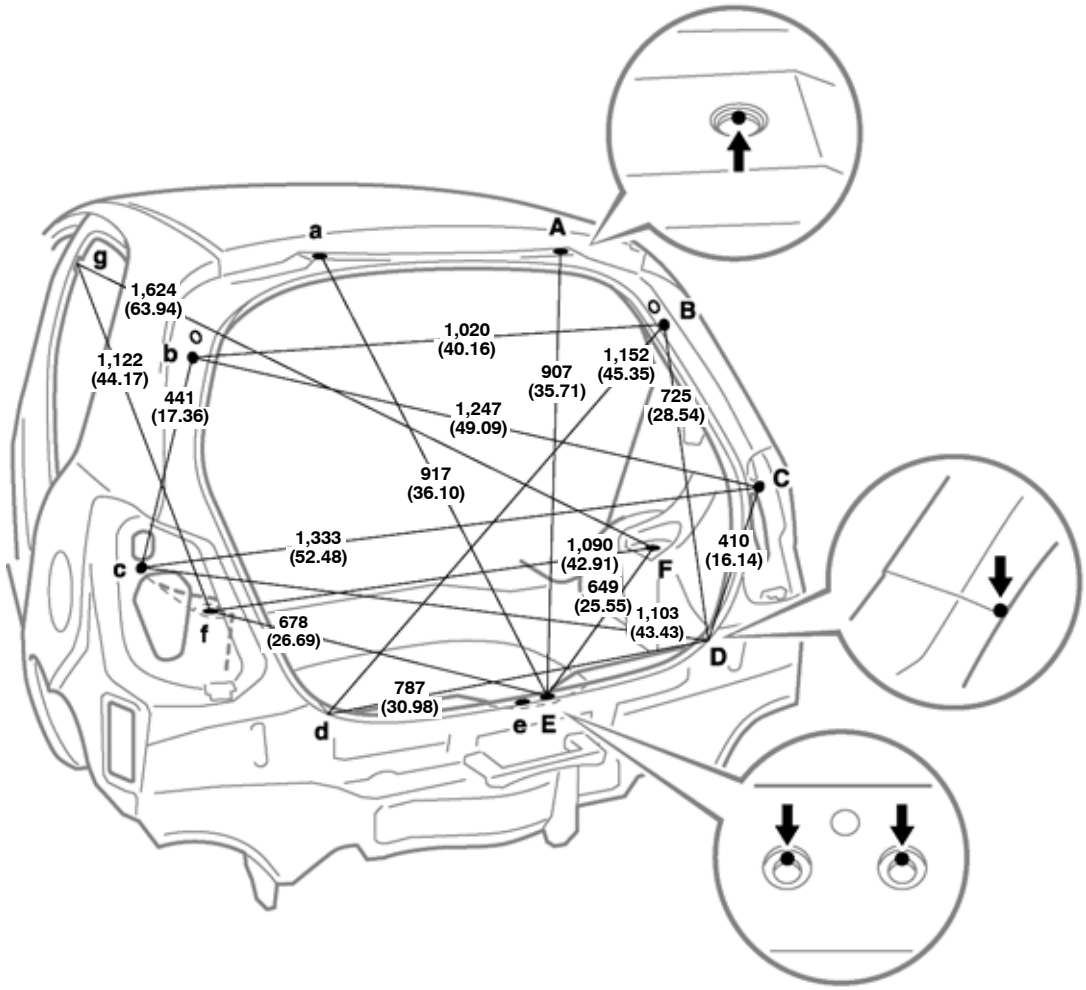


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole	ø 10.2 (0.402): RH ø 10.2 (0.402) × 12 (0.47): LH	E, e	Back door lock striker installation nut	—
B, b	Back door stay installation nut	M6 (0.24)	F, f	Rear shock absorber installation hole–inner	M8 (0.31)
C, c	Back door opening trough standard hole	ø 10 (0.39)	G, g	Center body pillar assembly mark	ø 18 (0.71)
D, d	Back door opening trough/Body lower back panel adjoining point	—	—	—	—

BODY OPENING AREAS (Rear View)
Sedan

(Three-Dimensional Distance)

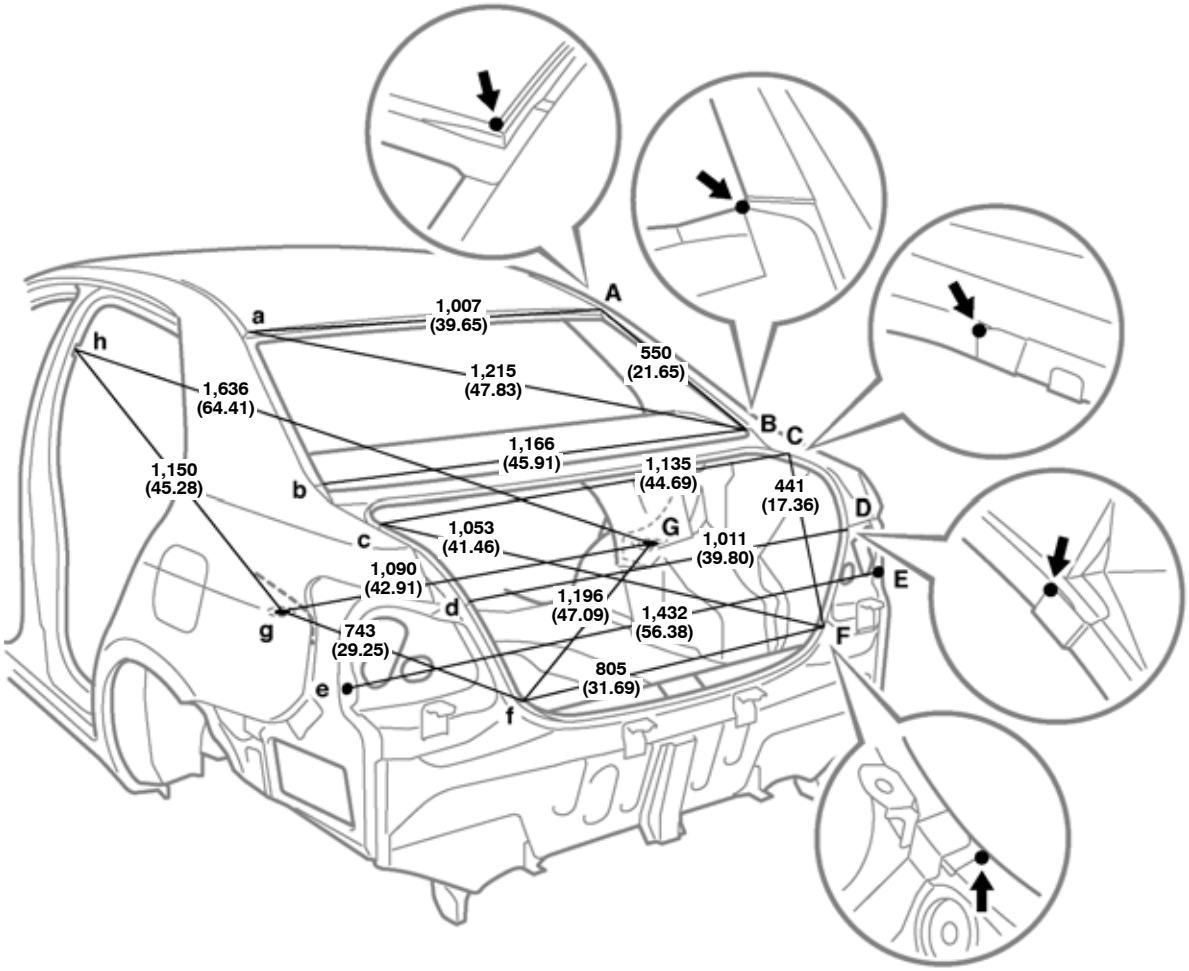


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	E, e	Quarter panel standard hole	ø13 (0.51)
B, b	Upper back panel corner	—	F, f	Body lower back reinforcement corner	—
C, c	Back door opening trough corner	—	G, g	Rear shock absorber installation hole	ø18 (0.71)
D, d	Luggage door opening front trough corner	—	H, h	Center body pillar assembly mark	—


UNDER BODY
Hatchback

(Three-Dimensional Distance)

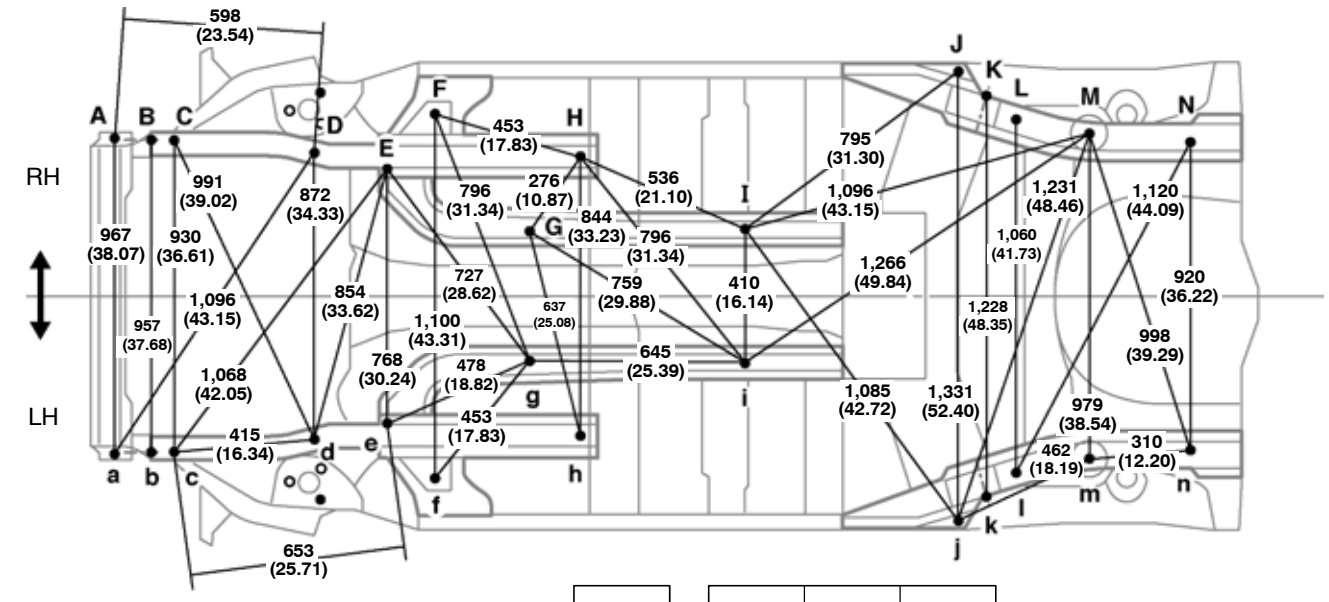

G-g
390 (15.35)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

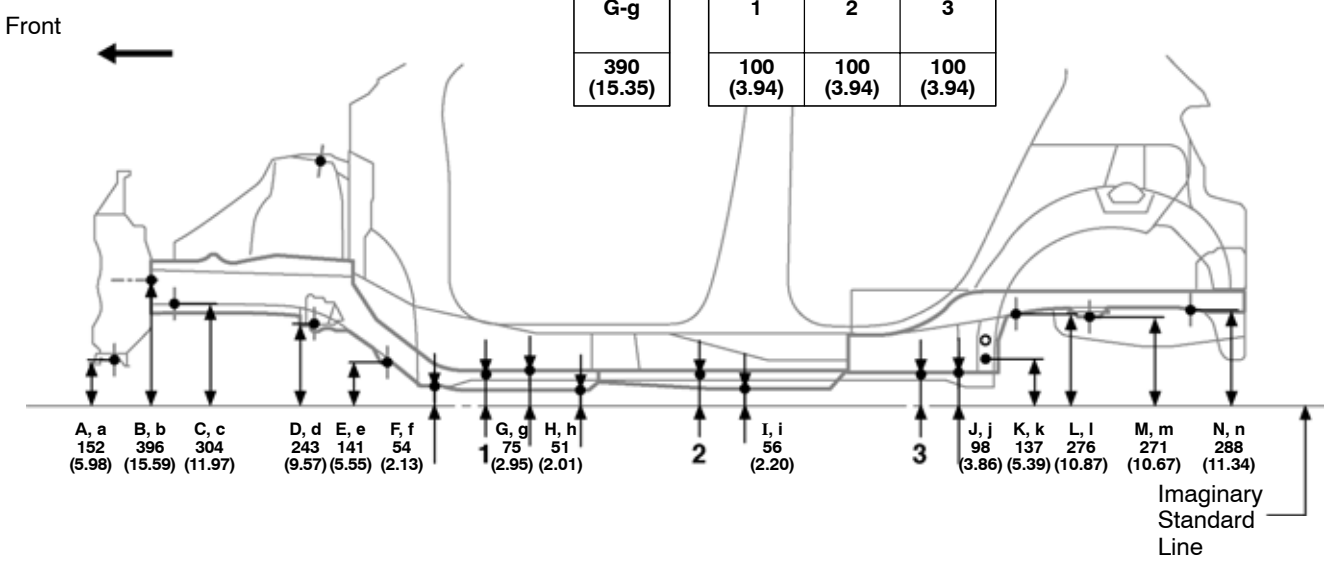


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator side support installation nut	M6 (0.24)	H, h	Front side member standard hole	ø 18 (0.71)
B, b	Radiator side support installation hole	ø 6.3 (0.248)	I, i	Front floor pan standard hole	ø 18 (0.71)
C, c	Front side member standard hole	ø 18 (0.71)	J, j	Floor side inner rear member standard hole	ø 18 (0.71)
D, d	Front suspension installation nut	M12 (0.47)	K, k	Rear axle beam installation outer hole-inner	ø 15 (0.59)
E, e	Front suspension installation nut	M14 (0.55)	L, l	Rear floor side member standard hole	ø 18 (0.71)
F, f	Torque box front standard hole	ø 25 (0.98)	M, m	Rear spring plate standard hole	ø 18 (0.71)
G, g	Front floor pan standard hole	ø 18 (0.71)	N, n	Rear floor side member standard hole	ø 18 (0.71)

UNDER BODY
Sedan


(Three-Dimensional Distance)

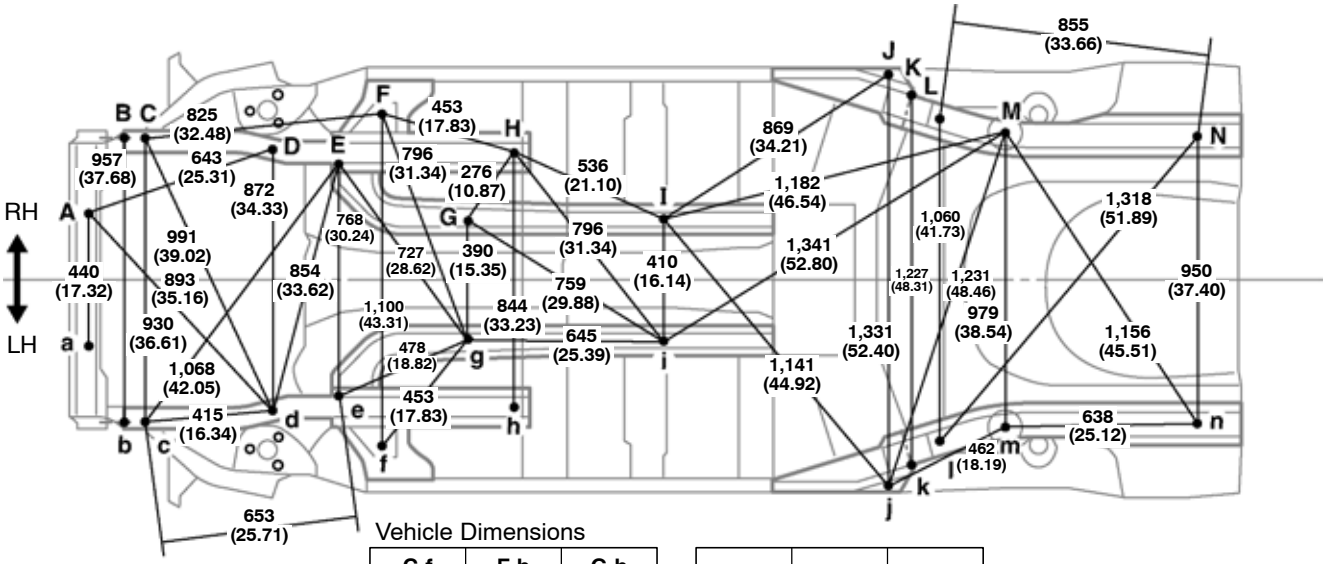

Vehicle Dimensions

C-f or c-F	F-h or f-H	G-h or g-H
1,305 (51.38)	1,065 (41.93)	637 (25.08)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

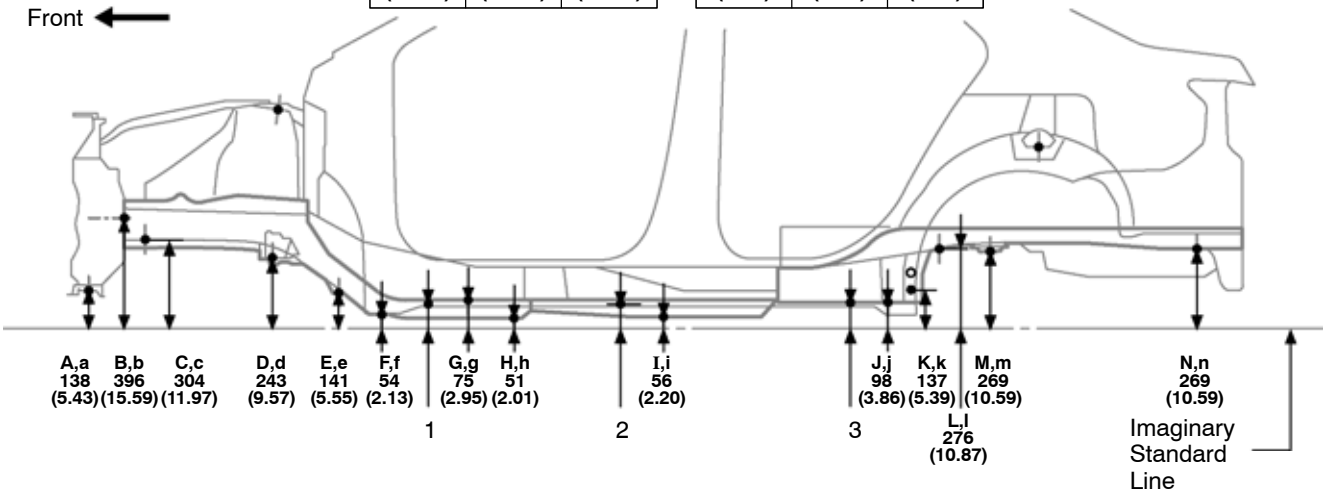


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator lower support standard hole	ø18 (0.71)	H, h	Front side member standard hole	ø18 (0.71)
B, b	Radiator side support inatallation hole	ø6.3 (0.248)	I, i	Front floor pan standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	J, j	Floor side inner rear member standard hole	ø18 (0.71)
D, d	Front suspension member installation nut	M12 (0.47)	K, k	Rear axle beam installation outer hole-inner	ø15 (0.59)
E, e	Front suspension member installation nut	M14 (0.55)	L, l	Rear floor side member standard hole	ø18 (0.71)
F, f	Torque box front standard hole	ø25 (0.98)	M, m	Rear spring plate standard hole	ø18 (0.71)
G, g	Front floor pan standard hole	ø18 (0.71)	N, n	Rear floor side member standard hole	ø18 (0.71)

UNDER BODY
Hatchback


(Two-Dimensional Distance)

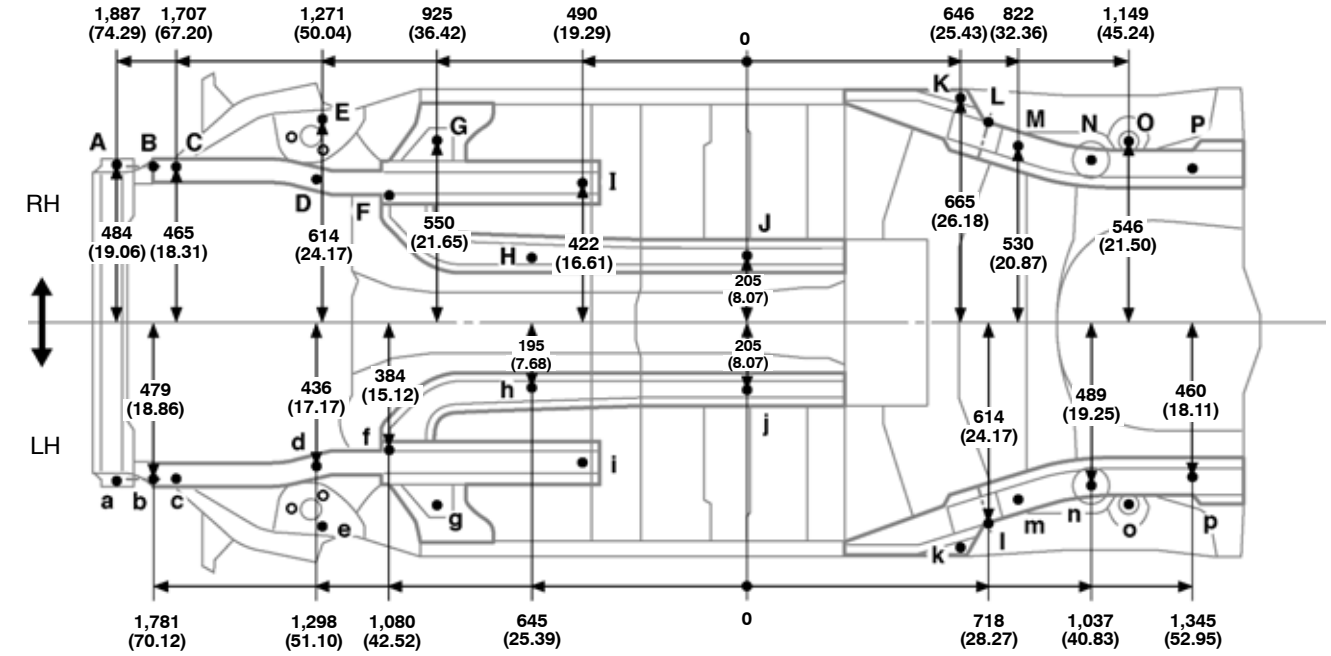

Front

Wheel Base	2,460 (96.85)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

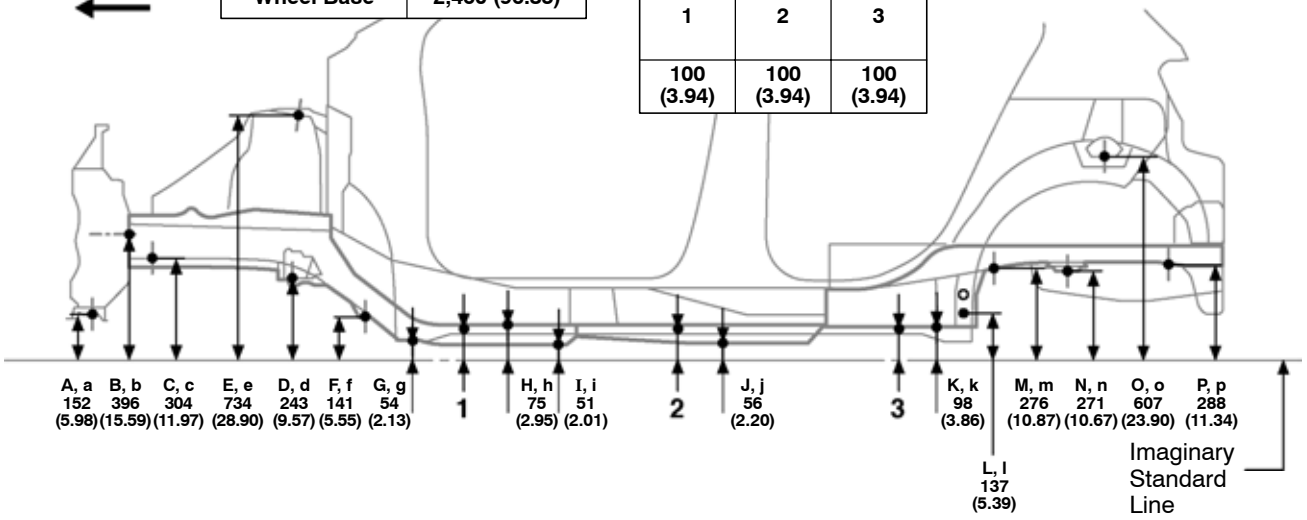


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator side support installation nut	M6 (0.24)	I, i	Front side member standard hole	ø 18 (0.71)
B, b	Radiator side support installation hole	ø 6.3 (0.248)	J, j	Front floor pan standard hole	ø 18 (0.71)
C, c	Front side member standard hole	ø 18 (0.71)	K, k	Floor side inner rear member standard hole	ø 18 (0.71)
D, d	Front suspension member installation nut	M12 (0.47)	L, l	Rear axle beam installation outer hole-inner	ø 15 (0.59)
E, e	Front spring support plate standard hole–outer	ø 11 (0.43)	M, m	Rear floor side member standard hole	ø 18 (0.71)
F, f	Front suspension member installation nut	M14 (0.55)	N, n	Rear spring plate standard hole	ø 18 (0.71)
G, g	Torque box front standard hole	ø 25 (0.98)	O, o	Rear shock absorber installation hole	ø 18 (0.71)
H, h	Front floor pan standard hole	ø 18 (0.71)	P, p	Rear floor side member standard hole	ø 18 (0.71)


UNDER BODY
Sedan

(Two-Dimensional Distance)

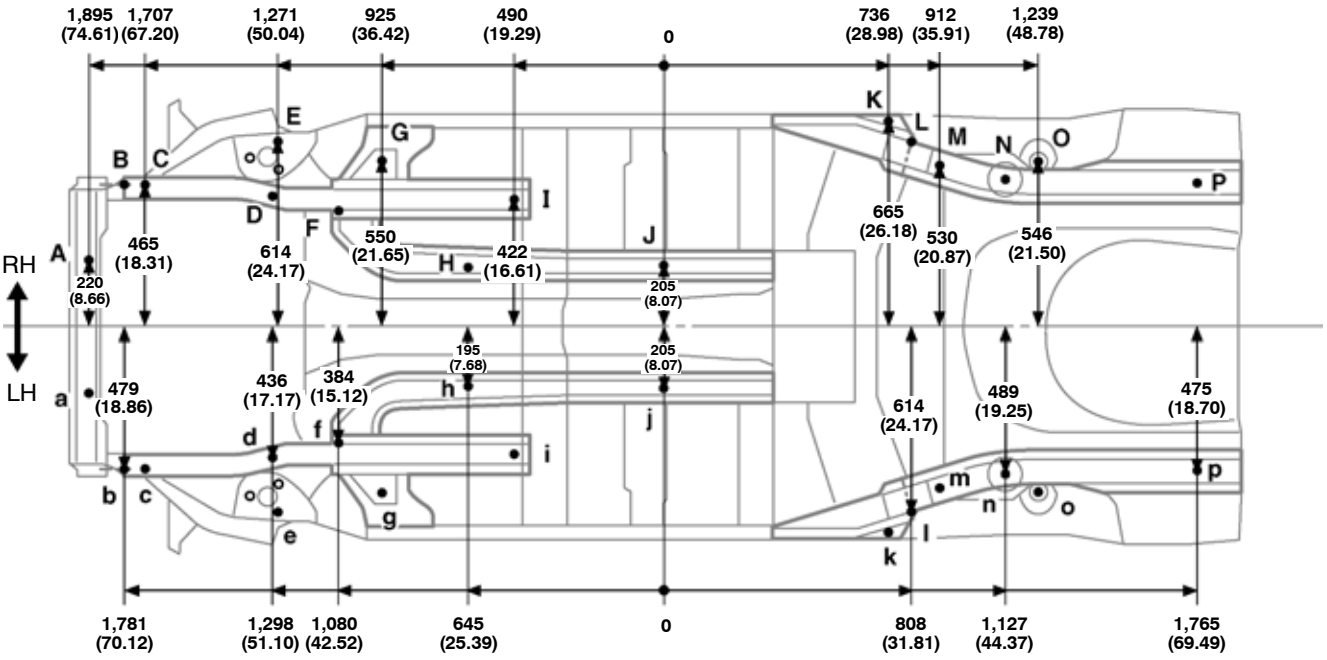

Wheel Base	2,460 (96.85)

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

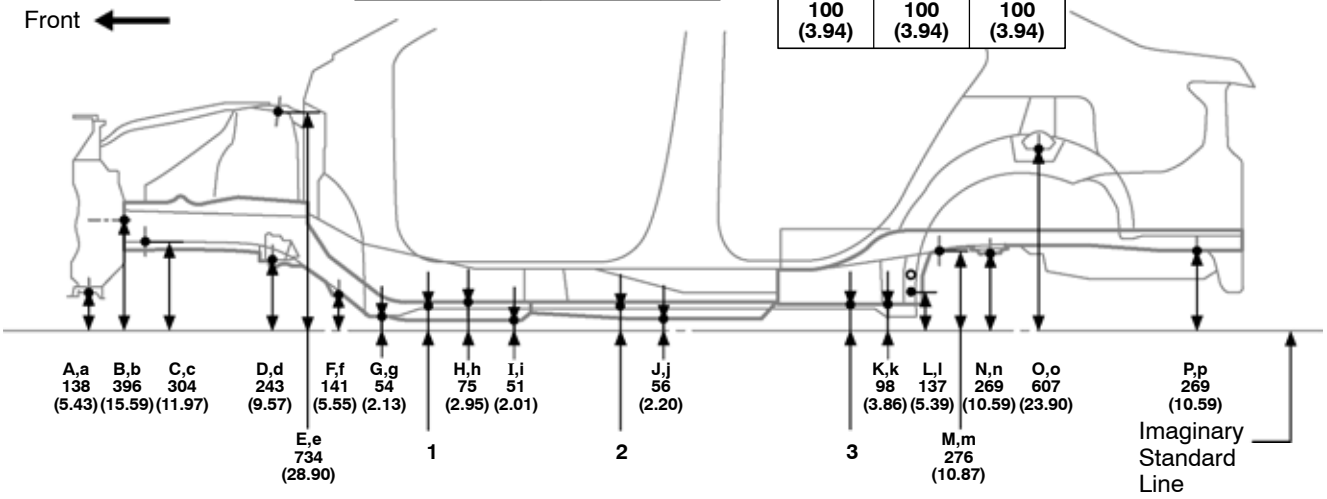

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Radiator lower support standard hole	ø18 (0.71)	I, i	Front side member standard hole	ø18 (0.71)
B, b	Radiator side support inatallation hole	ø6.3 (0.248)	J, j	Front floor pan standard hole	ø18 (0.71)
C, c	Front side member standard hole	ø18 (0.71)	K, k	Floor side inner rear member standard hole	ø18 (0.71)
D, d	Front suspension member installation nut	M12 (0.47)	L, l	Rear axle beam installation outer hole-inner	ø15 (0.59)
E, e	Front spring support plate standard hole	ø11 (0.43)	M, m	Rear floor side member standard hole	ø18 (0.71)
F, f	Front suspension member installation nut	M14 (0.55)	N, n	Rear spring plate standard hole	ø18 (0.71)
G, g	Torque box front standard hole	ø25 (0.98)	O, o	Rear shock absorber installation hole	ø18 (0.71)
H, h	Front floor pan standard hole	ø18 (0.71)	P, p	Rear floor side member standard hole	ø18 (0.71)