
■IGNITION SYSTEM

1. General

- A DIS (Direct Ignition System) is used. The DIS ensures the ignition timing accuracy, reduces high-voltage loss, and enhances the overall reliability of the ignition system by eliminating the distributor.
- The DIS is an independent ignition system which has one ignition coil (with igniter) for each cylinder.
- The spark plug caps, which connect to the spark plugs, are integrated with the ignition coil. Also, the igniter is enclosed to simplify the system.

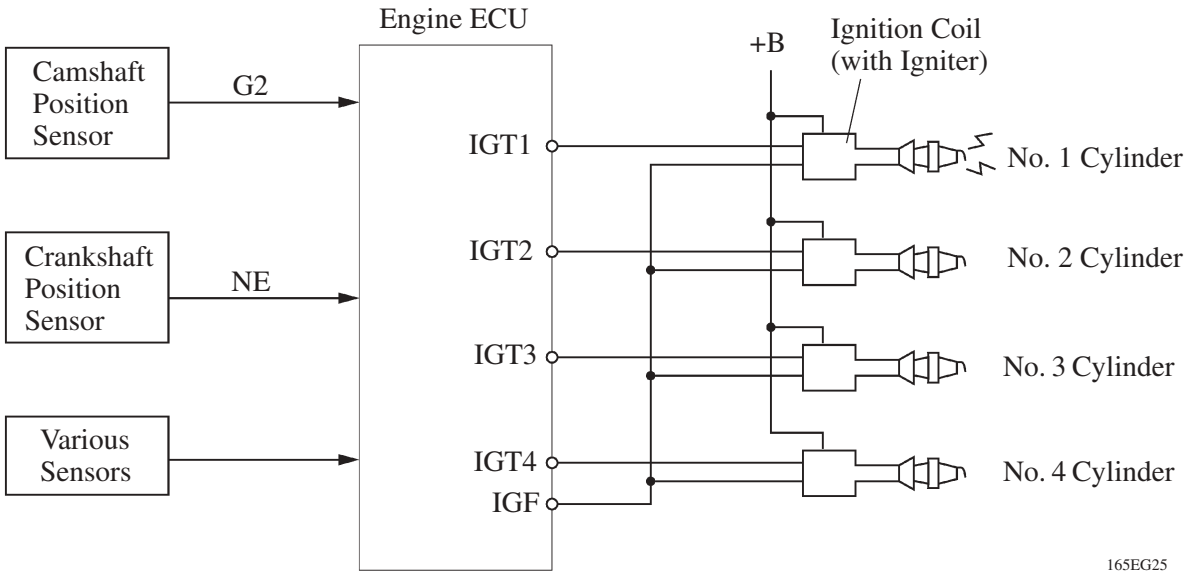

2. Spark Plug

A conventional type spark plug is used.

▶ Specifications ◀

Spark Plug	DENSO	K16R-U
Plug Gap	0.7 – 0.8 mm (0.028 – 0.031 in.)	