■STARTING SYSTEM

Conventional planetary reduction type starter is used.


▶ Specifications ◀

Model	Standard	Cold Area Specification Models
Rating Output	0.8 kW	1.0 kW
Rating Voltage	12 V	12 V
Length*1 mm (in.)	154 (6.1)	164 (6.5)
Weight g (lb)	2800 (6.2)	3100 (6.8)
Rotational Direction*2	Clockwise	Clockwise

*1: Length from the mounted area to the rear end of the starter.
*2: Viewed from pinion side.

■SERPENTINE BELT DRIVE SYSTEM

Accessory components are driven by a serpentine belt consisting of a single V-ribbed belt. It reduces the overall engine length, weight and the number of engine parts.

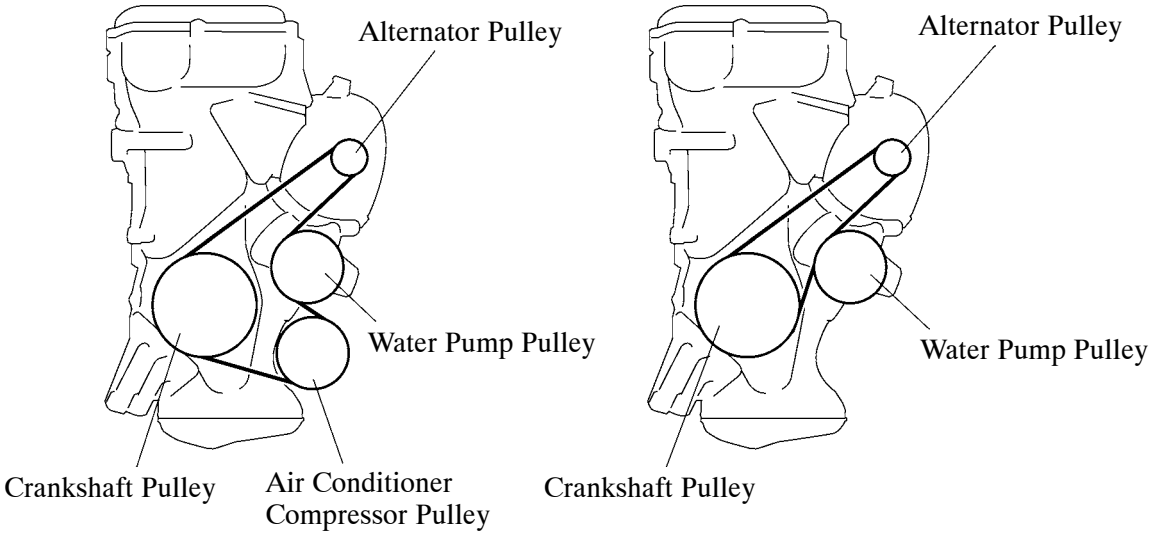

Models with Air Conditioner **Models without Air Conditioner**

04FEG105Y