


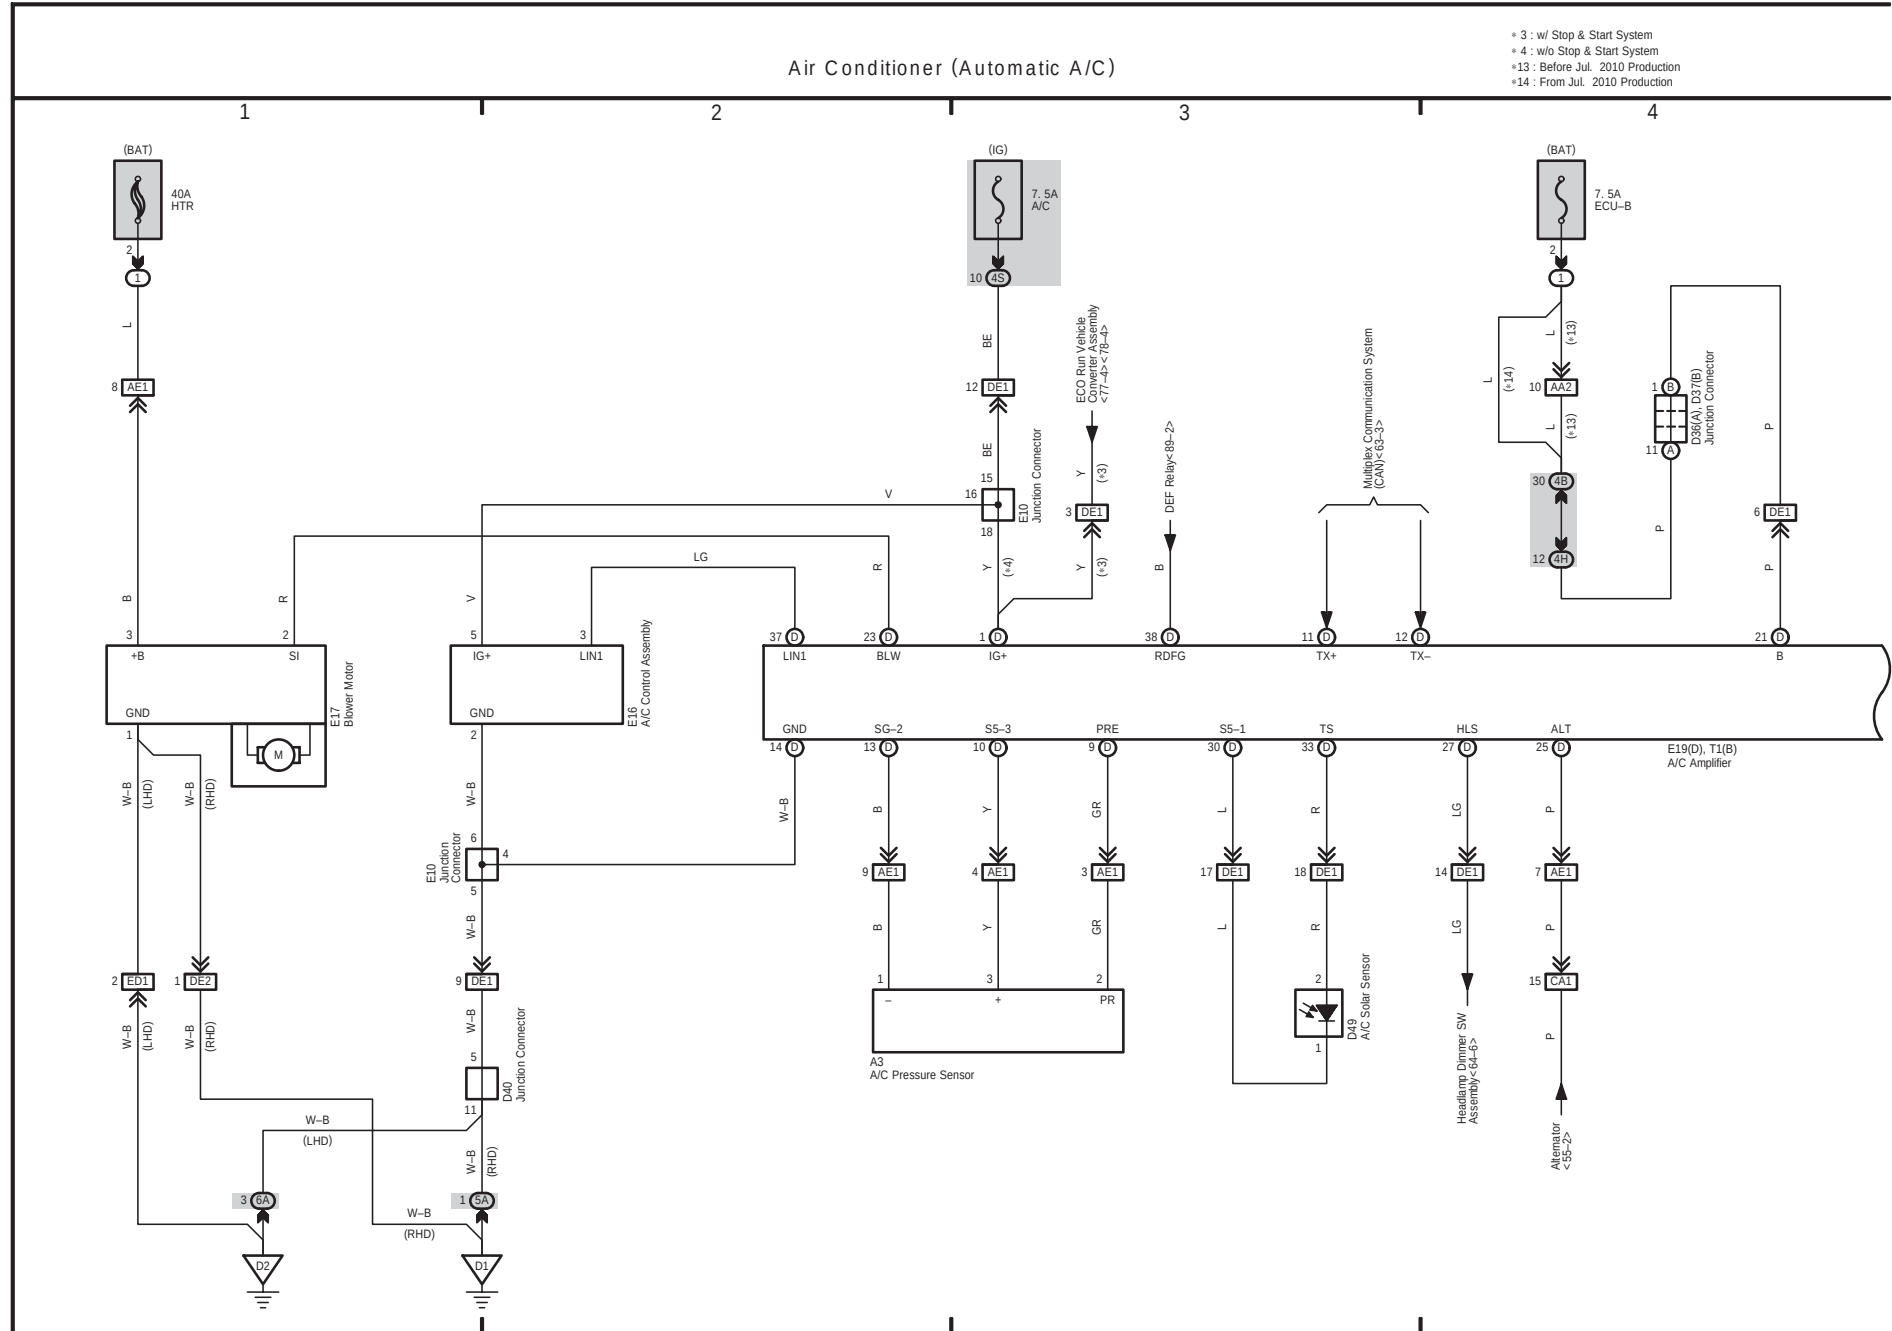

A number line is shown with tick marks at 5, 6, 7, and 8. A point A is marked at 8. A bracket below the line, spanning from 4 to 8, is labeled 'R' and '(= 4 * 12)'.

E12
A/C Room Temp. Sensor

ST+ ST-

1 2

$>V$ $\frac{1}{2}S$

29 TR 34 SG-1

Diagram illustrating the wiring for the A/C Blower Assembly, showing connections to the A/C Evaporator Temp. Sensor and three Damper Servo Motors (Air Vent Mode, Air Inlet, and Air Mix Driver Side).

The diagram shows the following components and connections:

- Power Supply:** Labeled with terminals SG, TE, BUS G, BUS, and B BUS.
- A/C Evaporator Temp. Sensor:** Connected to SG and TE.
- Connector Housing Color (Red):** Connected to BUS G and BUS. Controls the Damper Servo Motor (Air Vent Mode).
- Connector Housing Color (Black):** Connected to BUS G and BUS. Controls the Damper Servo Motor (Air Inlet).
- Connector Housing Color (Blue):** Connected to BUS G and B BUS. Controls the Damper Servo Motor (Air Mix Driver Side).

The Damper Servo Motors are labeled:

- Damper Servo Motor (Air Vent Mode)
- Damper Servo Motor (Air Inlet)
- Damper Servo Motor (Air Mix Driver Side)

The diagram is labeled T1(B) and A/C Blower Assembly.

[illegible]

YARIS (EMOOSCE)

93 YARIS (TMMF Made From Nov. 2008 Production) (Cont' d)

YARIS (EM00SCE)

