

DTC**B1166/88****Open in Curtain Shield Squib LH Circuit****DESCRIPTION**

The curtain shield squib LH circuit consists of the center airbag sensor assembly and the curtain shield airbag assembly LH.


The circuit instructs the SRS to deploy when deployment conditions are met.

DTC B1166/88 is recorded when an open circuit is detected in the curtain shield squib LH circuit.

DTC No.	DTC Detecting Condition	Trouble Area
B1166/88	<ul style="list-style-type: none"> Open circuit in ICL+ wire harness or ICL- wire harness of curtain shield squib LH Curtain shield squib LH malfunction Center airbag sensor assembly malfunction 	<ul style="list-style-type: none"> Curtain shield airbag assembly LH (Curtain shield squib LH) Center airbag sensor assembly Floor wire No.2

RS**WIRING DIAGRAM**

See page [RS-228](#).

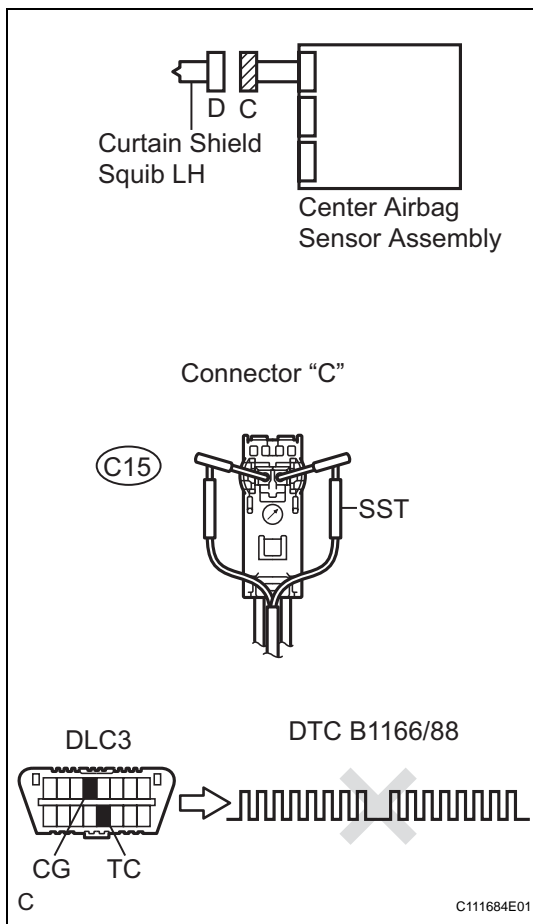1**CHECK CURTAIN SHIELD AIRBAG ASSEMBLY LH (CURTAIN SHIELD SQUIB LH)**

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the connectors from the curtain shield airbag assembly LH.
- Connect the white wire side of SST (resistance 2.1 Ω) to the floor wire NO.2.

CAUTION:

Never connect a tester to the curtain shield airbag assembly LH (Curtain shield squib LH) for measurement, as this may lead to a serious injury due to airbag deployment.

NOTICE:

Do not forcibly insert the SST into the terminals of the connector when connecting.

Insert the SST straight into the terminals of the connector.

SST 09843-18060

- Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Clear the DTCs stored in memory (See page [RS-32](#)).
- Turn the ignition switch to the LOCK position.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Check the DTCs (See page [RS-32](#)).

OK:

DTC B1166/88 is not output.

HINT:


Codes other than DTC B1166/88 may be output at this time, but they are not related to this check.

NG **Go to step 2**

OK

REPLACE CURTAIN SHIELD AIRBAG ASSEMBLY LH

2 CHECK FLOOR WIRE NO.2 (CURTAIN SHIELD SQUIB LH CIRCUIT)

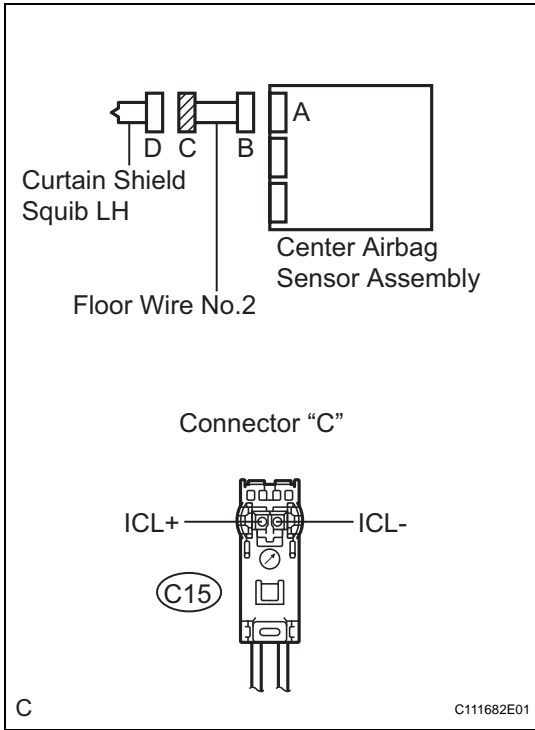

- (a) Disconnect the connector from the center airbag sensor assembly.
- (b) Measure the resistance according to the value(s) in the table below.

Resistance


Tester connection	Condition	Specified condition
C15-1 (ICL+) - C15-2 (ICL-)	Always	Below 1 Ω

RS

NG **REPAIR OR REPLACE FLOOR WIRE NO.2**

OK

3 CHECK CENTER AIRBAG SENSOR ASSEMBLY

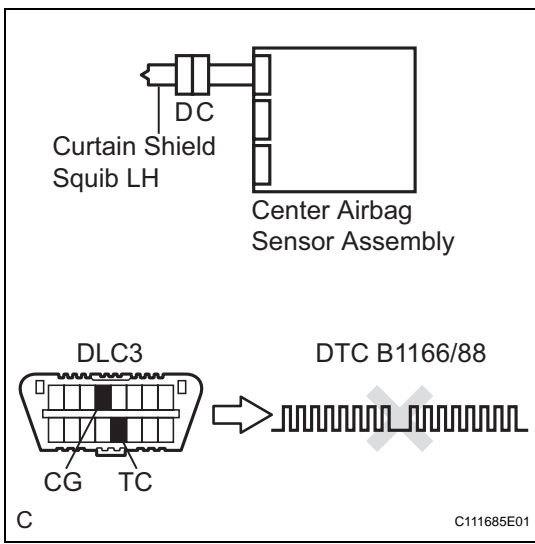

- (a) Connect the connectors to the curtain shield airbag assembly LH and the center airbag sensor assembly.
- (b) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- (c) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (d) Clear the DTCs stored in memory (See page RS-32).
- (e) Turn the ignition switch to the LOCK position.
- (f) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (g) Check the DTCs (See page RS-32).

OK:
DTC B1166/88 is not output.

HINT:
Codes other than DTC B1166/88 may be output at this time, but they are not related to this check.

NG

REPLACE CENTER AIRBAG SENSOR ASSEMBLY

OK

USE SIMULATION METHOD TO CHECK