


9. Rear Wiper Arm S902402


A: REMOVAL S902402A18

- 1) Raise wiper arm cover (A).
- 2) Loosen nut to remove wiper arm.

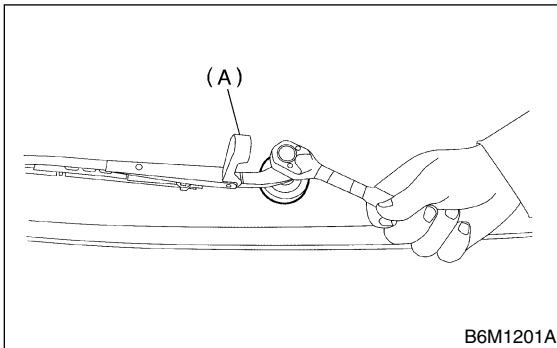

B: INSTALLATION S902402A11

- 1) Install in the reverse order of removal.
- 2) Operate rear wiper once.
- 3) Align blade to rear defogger heat wire (A).

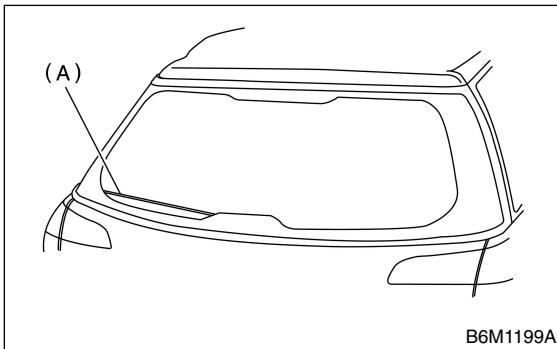

Tightening torque:

Refer to COMPONENT in General Description. <Ref. to WW-3, REAR WIPER, COMPONENT, General Description.>

C: ADJUSTMENT S902402A01

- 1) Operate rear wiper once.
- 2) Align blade to rear defogger heat wire (A).

