


Sunroof Assembly

SUNROOF/T-TOP/CONVERTIBLE TOP (SUNROOF)

4. Sunroof Assembly

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the roof trim. <Ref. to EI-50, REMOVAL, Roof Trim.>
- 3) Disconnect the harness connector of sunroof motor.
- 4) Remove the glass lid. <Ref. to SR-5, REMOVAL, Glass Lid.>
- 5) Remove the drain tube from frame assembly.
- 6) Remove the bolts, and then detach the frame assembly.

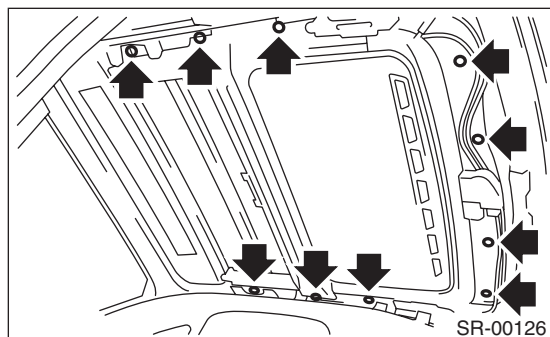

B: INSTALLATION

Install in the reverse order of removal.

CAUTION:


Be careful not to snag the harness.

NOTE:

- Be sure to connect the harness connector.
- When installing the drain tube, insert it securely into drain pipe.

Length A:

15 mm (0.59 in) or more

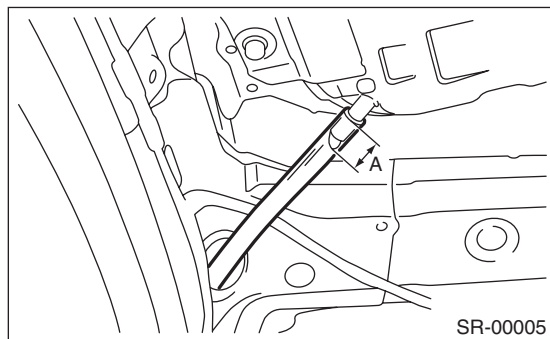

C: DISASSEMBLY

- 1) Remove the sunroof motor. <Ref. to SR-7, REMOVAL, Sunroof Motor.>
- 2) Remove the sunshade. <Ref. to SR-10, REMOVAL, Sunshade.>

D: ASSEMBLY

Assemble in the reverse order of disassembly.